



Features:

- ◇ .45", 3½ digit display
- ◇ Decimal point user selectable
- ◇ Engineering units user selectable
- ◇ Non-backlit LCD or choice of AMBER, GREEN, RED or POS GREEN backlit LCD
- ◇ Wide ZERO (Offset) & SPAN (Gain) adjustment
- ◇ Snap-in panel mounting
- ◇ Gasket and clamp provided for NEMA 4, NEMA 12, & IP66 applications

Specifications:

Display:	Digits:	3 ½ digits (±1999 counts)
	Type:	.45" (11.4 mm) 7 segment high contrast LCD
	Polarity:	automatic, "-" displayed
	Annunciators:	°F, °C, PSI, %, user selectable
	Decimal Points:	3 position, user selectable
	Overrange:	three lower order digits blank for inputs >1999 & < -1999
Inputs:	Voltage Ranges:	5 V, 10 V adjustable, 200mV fixed
	Configuration:	single ended
	Impedance:	390KΩ
Performance:	Accuracy:	±(0.05% of full scale + 1 count)
	Conversion Rate:	3 per second
	Normal Mode Rejection:	>30 dB @ 60 Hz
	Warmup:	10 minutes typical
	Temperature Coeff.:	± 100 ppm per °C typical
Adjustments:		25 turn potentiometers
	Offset Range:	-1999 to +1999
	Gain Range:	1 to 1999 (custom ranges available)
Environment:	Operating Range:	-10 to 50 °C
	Storage Range:	-40 to 75 °C
Power Supply:		12/24 DC
Mounting:		snap-in panel mount or clamp and gasket (included)
Connection:		screw terminals

Ordering Information:

PART NUMBER	BACKLIGHT COLOR	METER INPUT	METER POWER
DK199-XEC	NO BACKLIGHT	Voltage	12/24VDC
DK196-XEC	AMBER	Voltage	12/24VDC
DK197-XEC	GREEN	Voltage	12/24VDC
DK198-XEC	RED	Voltage	12/24VDC
DK200-XEC	POS GREEN	Voltage	12/24VDC

PW2-12	Regulated 120V AC to 12V DC Power Supply
PW2-24	Regulated 120V AC to 24V DC Power Supply
PW1.0	24V AC to adjustable DC output
CPW1.5	24V AC to adjustable DC output
CVC	Calibrator





Voltage Powered LCD Digital Panel Meters

Adjustable Voltage 3 1/2 Digit



DK190V-XEC


Dimensions

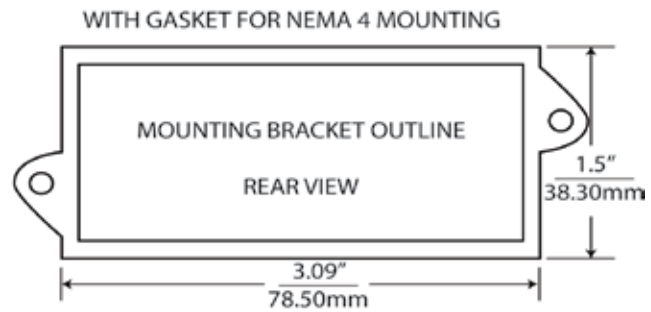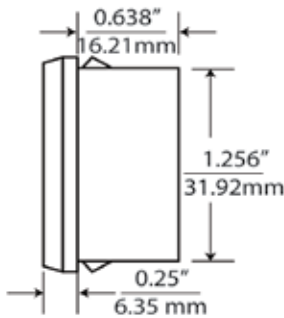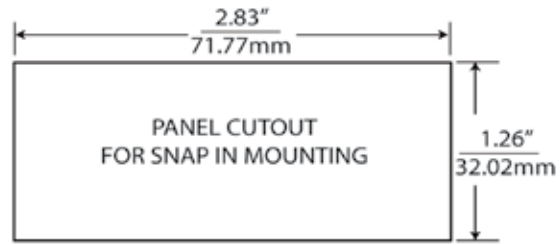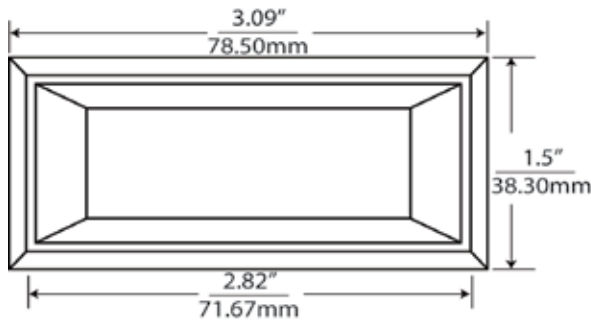



inches
mm

NOTES:

1. Panel thickness is: 0.032"/0.81mm to 0.25"/6.35mm
2. Gasket supplied is: 0.09"/2.25mm thick

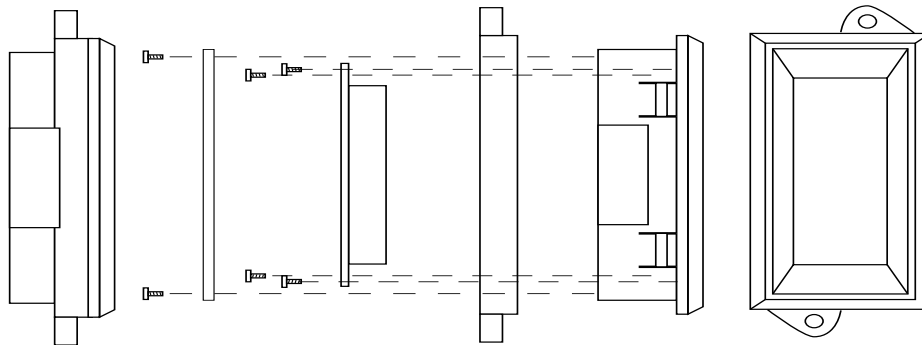

Wiring

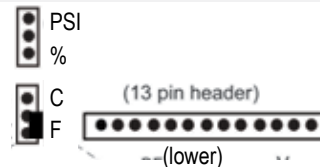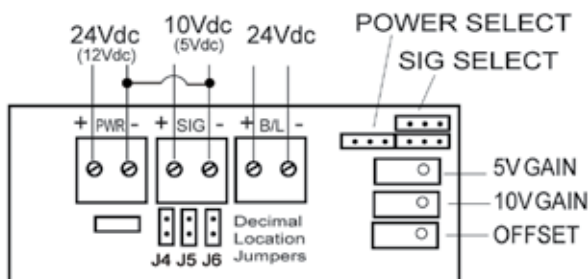

Decimal Point Selection

1. Locate jumpers J4 through J6 in the middle of the circuit board unit.
2. Jumper the appropriate decimal location as follows:
 - J4 - 000.0
 - J5 - 00.00
 - J6 - 0.000
 - None - 0000