

## SMT10E Series

### 13.2 Watts Non-Isolated DC-DC Converters

#### Data Sheet

**Total Power:** 13.2 Watts  
**Input Voltage:** 10 - 14 Vdc  
**# of Outputs:** Single

#### SPECIAL FEATURES

- 10 A current rating
- Input voltage range: 10 - 14 Vdc
- Output voltage range: 0.8 - 3.63 V
- Ultra-high efficiency: 94% @ 12 Vin and 3.3 Vout
- Extremely low internal power dissipation
- Minimal thermal design concerns
- Designed in reliability: MTBF of >6,920,000 hours per Telcordia SR-322
- Ideal solution where board space is at a premium or tighter card pitch is required
- Industry standard surface-mount footprint
- Available RoHS compliant
- Two year warranty

#### SAFETY

- UL/cUL CAN/CSA 22.2 No. 60950-1-03/UL60950-1, File No. E174104
- TÜV Product Service (EN60950) Certificate No. B03 10 38572 037
- CB report and certificate to IEC60950, Certificate No. DE3-51686M1



The SMT10E series are non-isolated dc-dc converters packaged in a surface-mount footprint giving designers a cost effective solution for conversion from a 12 V source. The SMT10E has a wide input range (10 - 14 Vdc) and offers a wide 0.8 - 3.63 Vdc output voltage range with a 10 A load, which allows for maximum design flexibility and a pathway for future upgrades. The SMT10E is designed for applications that include distributed power, workstations, optical network and wireless applications. Implemented using state of the art surface-mount technology and automated manufacturing techniques, the SMT10E offers compact size and efficiencies of up to 94%.

#### Electrical Specifications

Input		
Input voltage range		10 - 14 Vdc
Input current	No load (max.)	100 mA
Input current (max.)		3 A max. @ Io max. and Vout = 3.63 V
Input reflected ripple		100 mA rms
Remote ON/OFF		See Note 1
Start-up time		20 ms
Output		
Voltage adjustability		0.8 - 3.63 Vdc
Setpoint accuracy		±0.4%
Line regulation		±0.2%
Load regulation		±1.0%
Total error band		±3.0% typical
Minimum load		0 A
Overshoot/undershoot		None
Ripple and noise 5 to 20 MHz		60 mV pk=pk 25 mV rms max.
Temperature co-efficient		±0.01%/ °C
Transient response		100 mV max. deviation 100 µs recovery to within ±1.0%
Remote sense		10% Vo compensation

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

### General Specifications

Efficiency		94%
Insulation voltage		Non-isolated
Switching frequency	Fixed	320 kHz typical
Approvals and standards		EN60950 UL/cUL60950
Material flammability		UL94V-0
Dimensions	L x W x H	33.02 x 13.46 x 8.21 mm 1.3 x 0.53 x 0.323 inches
Weight		6.3 g (0.22 oz)
MTBF	Telcordia SR-332	6,920,000 hours

### Environmental Specifications

Thermal performance	Operating ambient temperature	-40 °C to +85 °C
See Note 2	Non-operating temperature	-40 °C to +125 °C
<b>Protection</b>		
Short-circuit	Continuous	
Thermal	Automatic recovery	

### EMC Characteristics

Electrostatic discharge	EN61000-4-2, IEC801-2
Conducted immunity	EN61000-4-6
Radiated immunity	EN61000-4-3

### Ordering Information

Model Number <sup>(3,4)</sup>	Output Power (Max.)	Input Voltage	Output Voltage	Output Current (Min.)	Output Current (Max.)	Efficiency (Typical)	Regulation	
							Line	Load
SMT10E-12W3V3-J	33 W	10 - 14 Vdc	0.8 - 3.63 Vdc	0 A	10 A	94%	±0.2%	±1.0%

### Part Number System with Options

Product Family	Rated Output Current	Performance	Input Voltage	Type of Output	Output Voltage	Packaging Options
<b>SMT</b>	<b>10</b>	<b>E</b>	<b>12</b>	<b>W</b>	<b>3V3</b>	<b>J</b>
SMT - Surface-mount	10 = 10 Amps	E = Enhanced Performance	12 = 10 - 14 Vdc	W = Wide	0.08 - 3.63 Vdc	No '-T' suffix = Pb-free RoHS 6/6 compliant parts in trays -TJ = Pb-free RoHS 6/6 compliant parts in tape and reel

### Output Voltage Adjustment

The ultra-wide output voltage trim range offers major advantages to users who select the SMT10E-12W3V3J. It is no longer necessary to purchase a variety of modules in order to cover different output voltages. The output voltage can be trimmed in a range of 0.8 Vdc to 3.63 Vdc. When the SMT10E-12W3V3J converter leaves the factory the output has been adjusted to the default voltage of 0.8 V.

#### Notes:


- The SMT10E features a 'Positive Logic' Remote ON/OFF operation. If not using the Remote ON/OFF pin, leave the pin open (the converter will be on). The Remote ON/OFF pin is referenced to ground.
 

<b>Configuration</b>	<b>Converter Operation</b>
Remote pin open circuit	Unit is ON
Remote pin pulled low [Von/off < 0.8 V]	Unit is OFF
Remote pin pulled high [Von/off > 1.2 V]	Unit is ON

A 'Negative Logic' Remote ON/OFF version is also possible with this converter. To order please place the suffix '-R' at the end of the model number, e.g. SMT10E-12W3V3-RJ.
- Full derating curves available in both the Longform (Technical Reference) and Application Note.
- NOTICE: Some models do not support all options. Please contact your local Artesyn Embedded Technologies representative or use the on-line model number search tool at <http://www.Artesyn.com/power> to find a suitable alternative.

## Mechanical Drawings

Pin Connections	
Pin	Function
1	Remote ON/OFF
2	Remote Sense +*
3	Trim*
4	+Vout
5	Ground
6	+Vin

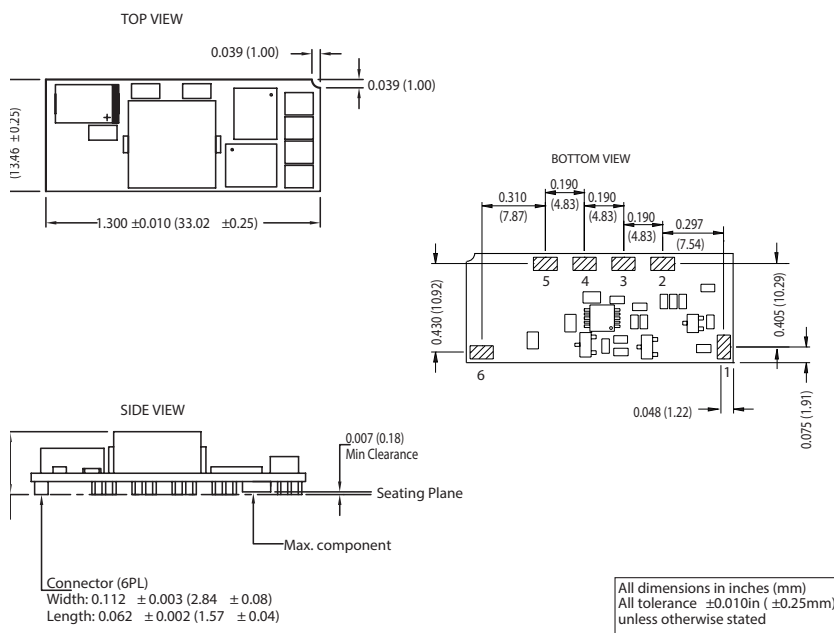

\*The sense function and the trim function are customer specified options. Please consult factory for details.

## WORLDWIDE OFFICES

### Americas

2900 S.Diablo Way  
 Tempe, AZ 85282  
 USA  
 +1 888 412 7832

### Europe (UK)

Waterfront Business Park  
 Merry Hill, Dudley  
 West Midlands, DY5 1LX  
 United Kingdom  
 +44 (0) 1384 842 211

### Asia (HK)

14/F, Lu Plaza  
 2 Wing Yip Street  
 Kwun Tong, Kowloon  
 Hong Kong  
 +852 2176 3333

**ARTESYN**<sup>™</sup>  
 EMBEDDED TECHNOLOGIES

[www.artesyn.com](http://www.artesyn.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2015 Artesyn Embedded Technologies, Inc.

For more information: [www.artesyn.com/power](http://www.artesyn.com/power)  
 For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)