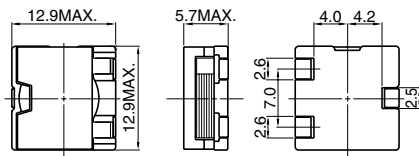



**SHIELDED TYPE**

# CEP125

**Outline**

By using the square wire, power inductors can be used for strong currents with low profile and low resistance.

**Dimensions (mm)**

**LAND PATTERNS(mm)**

**CONNECTION**

**CONSTRUCTION**


(0.3μH – 10μH)

(BOTTOM VIEW)

**◆ TYPE CEP125**

Parts No.	Inductance	D.C.R. (Ω) (Max) Typical / Rated D. C. Current (A)	Parts No.	Inductance	D.C.R. (Ω) (Max) Typical / Rated D. C. Current (A)
0R3	0.3μH		2R5	2.5μH	3.4 (2.8) / 10.0
0R4	0.4μH		2R7	2.7μH	
0R6	0.66μH		2R8	2.8μH	
0R7	0.7μH		3R0	3.0μH	
0R8	0.8μH		3R2	3.2μH	
0R9	0.9μH		3R6	3.6μH	
1R0	1.0μH		4R0	4.0μH	5.4 (4.5) / 8.3
1R2	1.2μH		4R3	4.3μH	
1R3	1.3μH		4R8	4.8μH	
1R4	1.4μH		5R6	5.6μH	
1R5	1.5μH	2.5 (2.1) / 14.0	6R0	6.0μH	8.0 (6.6) / 6.7
1R6	1.6μH		6R4	6.4μH	
1R7	1.7μH		7R2	7.2μH	
1R8	1.8μH		8R0	8.0μH	
2R1	2.1μH		8R2	8.2μH	11.4 (9.5) / 5.8
2R2	2.2μH		100	10.0μH	13.5 (11.2) / 5.0
2R4	2.4μH				

Measuring Freq. (L)

CEP125 100kHz

Tolerance of Inductance

CEP125 ± 20% (M)

Rated D.C. Current

This inductance the value of current when the inductance is over 75% of the nominal value.

**Sales Contact**
**North America**  
 1701 Golf Road, Tower 3  
 Suite 400, Rolling  
 Meadows, IL 60008, USA  
 Tel: (1) 847 545-6700  
 Fax: (1) 847 545-6720

**Japan**  
 Nihonbashi- ingyocho  
 2-Chome, Chuo-ku,  
 Tokyo, Japan  
 Tel: (81) 03 3667-3301  
 Fax: (81) 03 3667-3456

**Hong Kong**  
 14/F, Eastern Centre,  
 1065 King's Road, Quarry  
 Road, Hong Kong  
 Tel: (852) 2880-6688  
 Fax: (852) 2880-9596

**Taiwan**  
 No. 171, Futech Street,  
 Hsin-I, Taipei, Taiwan,  
 ROC  
 Tel: (886) 2 2726-2177  
 Fax: (886) 2 2728-2726

**Singapore**  
 996 Bendemeer  
 Road #04-05 to 06  
 Singapore 339944  
 Tel: (65) 2963-388  
 Fax: (65) 2963-390

**Europe**  
 Chaussee de Tervuren113A,  
 1160 Brussels  
 Belgium  
 Email:  
 europe.sales@hk.sumida.com