



# MMBT2907A

## SMALL SIGNAL PNP TRANSISTOR

PRELIMINARY DATA

Type	Marking
MMBT2907A	M29

- SILICON EPITAXIAL PLANAR PNP TRANSISTOR
- MINIATURE SOT-23 PLASTIC PACKAGE FOR SURFACE MOUNTING CIRCUITS
- TAPE & REEL PACKING
- THE NPN COMPLEMENTARY TYPE IS MMBT2222A


### APPLICATIONS

- WELL SUITABLE FOR PORTABLE EQUIPMENT
- SMALL LOAD SWITCH TRANSISTOR WITH HIGH GAIN AND LOW SATURATION VOLTAGE



SOT-23

### INTERNAL SCHEMATIC DIAGRAM



### ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
$V_{CBO}$	Collector-Emitter Voltage ( $I_E = 0$ )	-60	V
$V_{CEO}$	Collector-Emitter Voltage ( $I_B = 0$ )	-60	V
$V_{EBO}$	Emitter-Base Voltage ( $I_C = 0$ )	-5	V
$I_C$	Collector Current	-0.6	A
$I_{CM}$	Collector Peak Current ( $t_p < 5$ ms)	-0.8	A
$P_{tot}$	Total Dissipation at $T_{amb} = 25$ °C	350	mW
$T_{stg}$	Storage Temperature	-65 to 150	°C
$T_j$	Max. Operating Junction Temperature	150	°C

# MMBT2907A

## THERMAL DATA

$R_{thj-amb}$ •	Thermal Resistance Junction-Ambient	Max	357.1	°C/W
-----------------	-------------------------------------	-----	-------	------

• Device mounted on a PCB area of 1 cm<sup>2</sup>


## ELECTRICAL CHARACTERISTICS (T<sub>case</sub> = 25 °C unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I <sub>CEX</sub>	Collector Cut-off Current (V <sub>BE</sub> = -3 V)	V <sub>CE</sub> = -30 V			-50	nA
I <sub>BEX</sub>	Base Cut-off Current (V <sub>BE</sub> = -3 V)	V <sub>CE</sub> = -30 V			-50	nA
I <sub>CB0</sub>	Collector Cut-off Current (I <sub>E</sub> = 0)	V <sub>CB</sub> = -50 V			-10	nA
V <sub>(BR)CEO</sub> *	Collector-Emitter Breakdown Voltage (I <sub>B</sub> = 0)	I <sub>C</sub> = -10 mA	-60			V
V <sub>(BR)CBO</sub>	Collector-Base Breakdown Voltage (I <sub>E</sub> = 0)	I <sub>C</sub> = -10 μA	-60			V
V <sub>(BR)EBO</sub>	Emitter-Base Breakdown Voltage (I <sub>C</sub> = 0)	I <sub>E</sub> = -10 μA	-5			V
V <sub>CE(sat)</sub> *	Collector-Emitter Saturation Voltage	I <sub>C</sub> = -150 mA    I <sub>B</sub> = -15 mA I <sub>C</sub> = -500 mA    I <sub>B</sub> = -50 mA			-0.4 -1.6	V V
V <sub>BE(sat)</sub> *	Collector-Base Saturation Voltage	I <sub>C</sub> = -150 mA    I <sub>B</sub> = -15 mA I <sub>C</sub> = -500 mA    I <sub>B</sub> = -50 mA			-1.3 -2.6	V V
h <sub>FE</sub> *	DC Current Gain	I <sub>C</sub> = -0.1 mA    V <sub>CE</sub> = -10 V I <sub>C</sub> = -1 mA    V <sub>CE</sub> = -10 V I <sub>C</sub> = -10 mA    V <sub>CE</sub> = -10 V I <sub>C</sub> = -150 mA    V <sub>CE</sub> = -10 V I <sub>C</sub> = -500 mA    V <sub>CE</sub> = -10 V	75 100 100 100 50		300	
f <sub>T</sub>	Transition Frequency	I <sub>C</sub> = -50 mA    V <sub>CE</sub> = -20V    f = 100MHz	200			MHz
C <sub>CB0</sub>	Collector-Base Capacitance	I <sub>E</sub> = 0    V <sub>CB</sub> = -10 V    f = 1 MHz			8	pF
C <sub>EBO</sub>	Emitter-Base Capacitance	I <sub>C</sub> = 0    V <sub>EB</sub> = -2 V    f = 1 MHz			30	pF
t <sub>d</sub>	Delay Time	I <sub>C</sub> = -150 mA    I <sub>B</sub> = -15 mA			10	ns
t <sub>r</sub>	Rise Time	V <sub>CC</sub> = -30V			40	ns
t <sub>on</sub>	Switching On Time				45	ns
t <sub>s</sub>	Storage Time	I <sub>C</sub> = -150 mA    I <sub>B1</sub> = -I <sub>B2</sub> = -15mA		190		ns
t <sub>f</sub>	Fall Time	V <sub>CC</sub> = -30V			30	ns
t <sub>off</sub>	Switching Off Time			220		ns

\* Pulsed: Pulse duration = 300 μs, duty cycle ≤ 2 %

## SOT-23 MECHANICAL DATA

DIM.	mm			mils		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	0.85		1.1	33.4		43.3
B	0.65		0.95	25.6		37.4
C	1.20		1.4	47.2		55.1
D	2.80		3	110.2		118
E	0.95		1.05	37.4		41.3
F	1.9		2.05	74.8		80.7
G	2.1		2.5	82.6		98.4
H	0.38		0.48	14.9		18.8
L	0.3		0.6	11.8		23.6
M	0		0.1	0		3.9
N	0.3		0.65	11.8		25.6
O	0.09		0.17	3.5		6.7

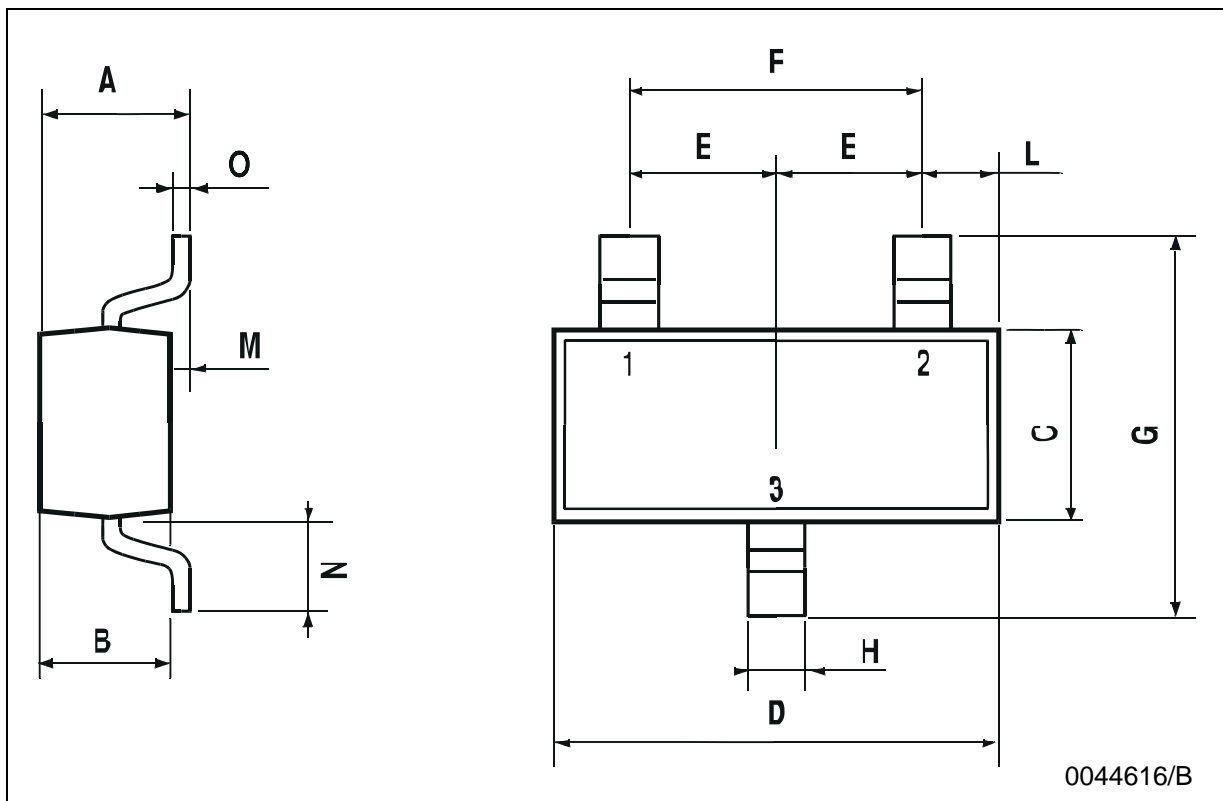

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 2003 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>