
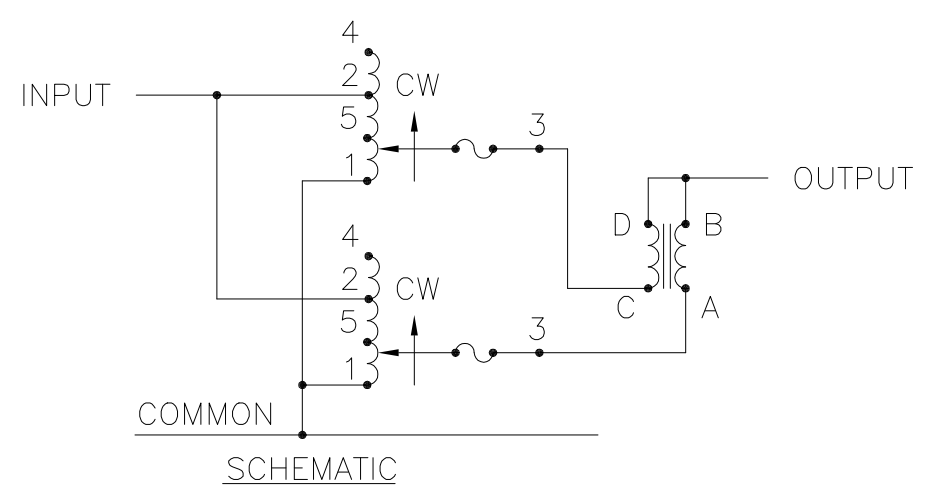


* MAXIMUM OUTPUT CURRENT IN OUTPUT VOLTAGE RANGE FROM 0 TO 25% ABOVE LINE VOLTAGE. AT HIGHER OUTPUT VOLTAGES, OUTPUT CURRENT MUST BE REDUCED ACCORDING TO RATING CURVE FIGURE A.
 ++ MAXIMUM KVA AT MAXIMUM OUTPUT AND CORRESPONDING DE-RATED CURRENT. MAXIMUM KVA AT LOWER OUTPUT VOLTAGES MAY BE CALCULATED FROM RATING CURVE, FIGURE A.
 V.D. = VOLTAGE DOUBLER.

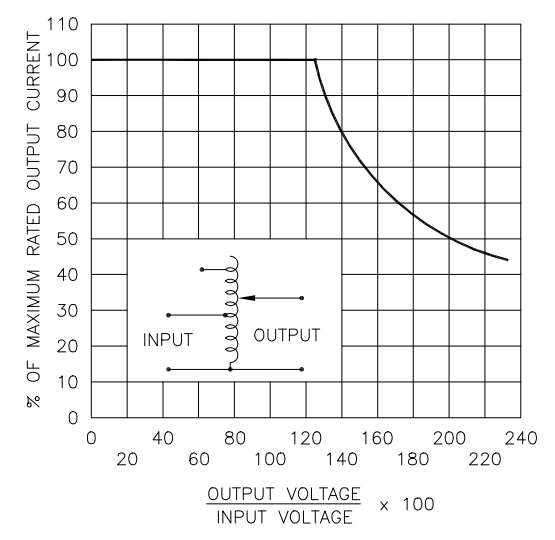

SPECIFICATIONS								
WIRING	INPUT		OUTPUT			SHAFT ROTATION FOR VOLTAGE INCREASE	TERMINAL CONNECTIONS FOR INCREASING VOLTAGE AS VIEWED FROM TOP	
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD			INPUT	OUTPUT
				MAX. AMPS	MAX. KVA			
SINGLE PHASE PARALLEL	240	50/60	0-240	70	16.8	CW	1-4	1-B
			0-280	70	19.6		1-2	1-B
	120	50/60	0-280	70* -30 V.D.	8.4 ++	CW	1-5	1-B

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS:
 DECIMALS .005
 HOLES .002
 ANGLES 1°
 DRAFT 1-1/2°
 UNITS IN [mm]
 ALL DIMENSIONS APPLY AFTER PLATING

TITLE: SPEC. CONTROL DRAWING
 VARIABLE TRANSFORMER
 TYPE: 6020CT-2P

STACO ENERGY PRODUCTS CO.
 A COMPONENTS CORPORATION OF AMERICA COMPANY
 DAYTON, OHIO U.S.A.

DRAWN BY: TIM RAU
 CHECKER: [blank]
 ENGINEER: [blank]
 DATE: 9/25/97
 WEIGHT APPROX. 148 LBS.
 SCALE .5=1
 SHEET 1 OF 1

CUSTOMER APPROVAL: [blank]
 DATE: [blank]
 DO NOT SCALE DWG.
 CODE IDENT. NO. 83008
 DWG. NO. 032-7428