

Features

- 10 kA, 8/20 μ s surge capability
- Low clamping voltage under surge
- Bidirectional TVS
- UL Recognized 

Applications


- AC line protection
- High power DC bus protection

PTVS10-xxxC Series High Current TVS Diodes

General Information

The PTVS10-xxxC range of high current bidirectional TVS diodes is designed for use in AC line protection and high power DC bus clamping applications. These devices offer bidirectional port protection from 58 volts to 470 volts.

The devices are RoHS* and UL compliant while also meeting IEC 61000-4-5 8/20 μ s current surge requirements.



Agency Approval

Description	
UL	File Number: Pending

Absolute Maximum Ratings (@ $T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

Rating	Symbol	Value	Unit
Repetitive Standoff Voltage	V_{WM}	58	V
		76	
		170	
		320	
		380	
		470	
Peak Current Rating per 8/20 μ s IEC 61000-4-5	I_{PPM}	10	kA
Operating Junction Temperature Range	T_J	-40 to +125	$^\circ\text{C}$
Storage Temperature Range	T_S	-55 to +150	$^\circ\text{C}$
Lead Temperature, Soldering (10 s)		260	$^\circ\text{C}$

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit	
I_D Standby Current	$V_D = V_{WM}$			10	μA	
$V_{(BR)}$ Breakdown Voltage	$I_{BR} = 10\text{ mA}$	PTVS10-058C	64	66	70	V
		PTVS10-076C	85	92	95	
		PTVS10-170C	190	200	210	
		PTVS10-320C	336	350	368	
		PTVS10-380C	401	420	443	
		PTVS10-470C	490	500	530	
V_C Clamping Voltage	$I_{PP} = 10\text{ kA}$	PTVS10-058C		120	130	V
		PTVS10-076C		150	160	
		PTVS10-170C		250	300	
		PTVS10-320C		440	500	
		PTVS10-380C		520	570	
		PTVS10-470C		620	680	
$V_{(BR)}$ Temperature Coefficient			0.1		$\%/^\circ\text{C}$	
C Capacitance	F = 10 kHz, $V_d = 1\text{ Vrms}$	PTVS10-058C		11.7	12.5	nF
		PTVS10-076C		8.6	10.0	
		PTVS10-170C		4.0	5.0	
		PTVS10-320C		2.7	3.5	
		PTVS10-380C		2.0	2.5	
		PTVS10-470C		1.7	2.2	

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

Europe: Tel: +41-41 768 5555 • Fax: +41-41 768 5510

The Americas: Tel: +1-951 781-5500 • Fax: +1-951 781-5700

www.bourns.com

*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

Specifications are subject to change without notice.


Customers should verify actual device performance in their specific applications.

PTVS10-xxxC Series High Current TVS Diodes

BOURNS®

Product Dimensions

The product is epoxy encapsulated per UL Class 94V-0 with Ag plated leads solderable per MIL-STD-750, Method 2026. The package dimensions and part marking are shown below.

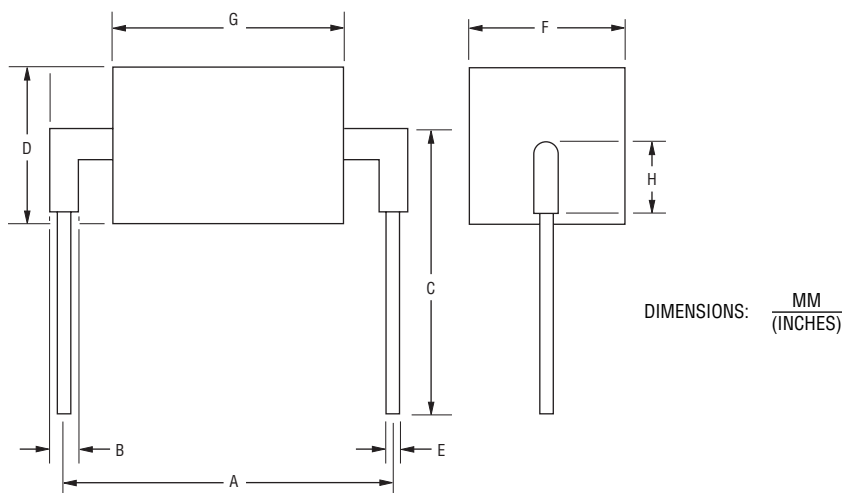

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

Dim.	PTVS10-058C	PTVS10-076C	PTVS10-170C	PTVS10-320C	PTVS10-380C	PTVS10-470C
A	$\frac{24.15 \pm 0.72}{(0.950 \pm 0.028)}$	$\frac{24.15 \pm 0.72}{(0.950 \pm 0.028)}$	$\frac{24.15 \pm 0.72}{(0.950 \pm 0.028)}$	$\frac{24.15 \pm 0.72}{(0.950 \pm 0.028)}$	$\frac{24.15 \pm 0.72}{(0.950 \pm 0.028)}$	$\frac{24.15 \pm 0.72}{(0.950 \pm 0.028)}$
B	$\frac{2.40}{(0.094)}$ Typ.	$\frac{2.40}{(0.094)}$ Typ.	$\frac{2.40}{(0.094)}$ Typ.	$\frac{2.40}{(0.094)}$ Typ.	$\frac{2.40}{(0.094)}$ Typ.	$\frac{2.40}{(0.094)}$ Typ.
C	$\frac{15.0}{(0.59)}$ Min.	$\frac{15.0}{(0.59)}$ Min.	$\frac{15.0}{(0.59)}$ Min.	$\frac{15.0}{(0.59)}$ Min.	$\frac{15.0}{(0.59)}$ Min.	$\frac{15.0}{(0.59)}$ Min.
D	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.
E	$\frac{1.25 \pm 0.05}{(0.049 \pm 0.002)}$	$\frac{1.25 \pm 0.05}{(0.049 \pm 0.002)}$	$\frac{1.25 \pm 0.05}{(0.049 \pm 0.002)}$	$\frac{1.25 \pm 0.05}{(0.049 \pm 0.002)}$	$\frac{1.25 \pm 0.05}{(0.049 \pm 0.002)}$	$\frac{1.25 \pm 0.05}{(0.049 \pm 0.002)}$
F	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.
G	$\frac{5.0}{(0.20)}$ Max.	$\frac{6.0}{(0.24)}$ Max.	$\frac{13.0}{(0.51)}$ Max.	$\frac{19.0}{(0.75)}$ Max.	$\frac{19.0}{(0.75)}$ Max.	$\frac{21.0}{(0.83)}$ Max.
H	$\frac{8.0}{(0.32)}$ Max.	$\frac{8.0}{(0.32)}$ Max.	$\frac{8.0}{(0.32)}$ Max.	$\frac{8.0}{(0.32)}$ Max.	$\frac{8.0}{(0.32)}$ Max.	$\frac{8.0}{(0.32)}$ Max.

How to Order

PTVS 10 - xxx C

Series _____
 PTVS = PowerTVS High Current Diode

Peak Current Rating _____
 10 = 10 kA

Repetitive Standoff Voltage _____
 058 = 58 V
 076 = 76 V
 170 = 170 V
 320 = 320 V
 380 = 380 V
 470 = 470 V

Suffix _____
 C = Bidirectional Device

Typical Part Marking

PTVS10-058C 10058
 PTVS10-076C 10076
 PTVS10-170C 10170
 PTVS10-320C 10320
 PTVS10-380C 10380
 PTVS10-470C 10470


Specifications are subject to change without notice. Customers should verify actual device performance in their specific applications.

PTVS10-xxxC Series High Current TVS Diodes


BOURNS®

Performance Graphs


V-I Characteristic

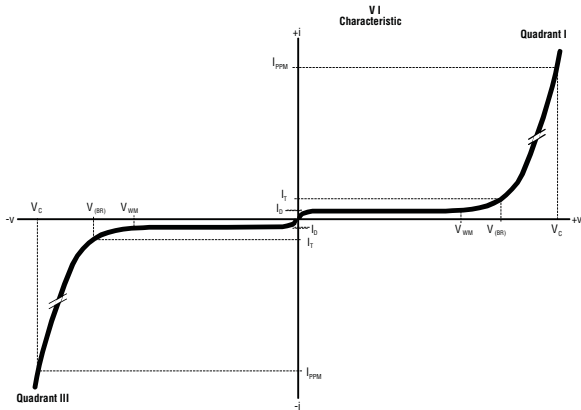

Typical V_{BR} vs. Junction Temperature

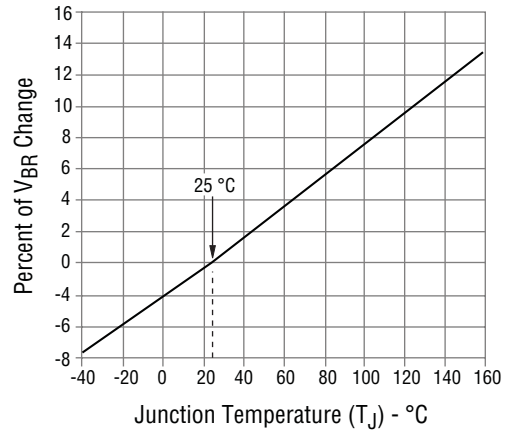


Typical Peak Power Derating

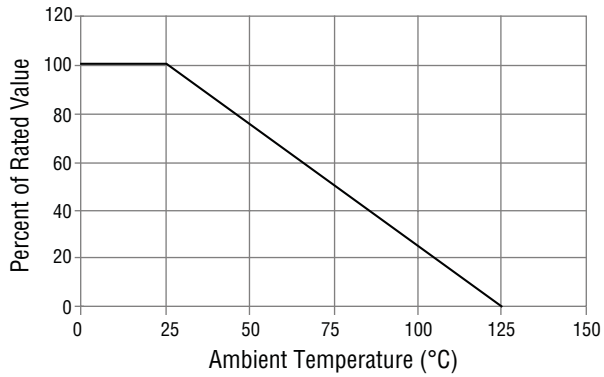

Application

A typical application for PowerTVS products includes AC power line primary protection.

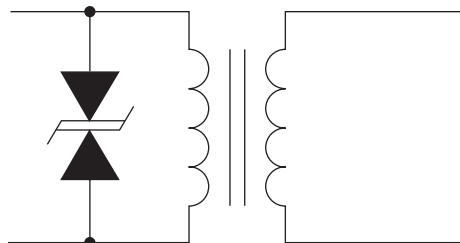


Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

PTVS10-xxxC Series High Current TVS Diodes




Performance Graphs (Continued)


Surge Response - PTVS10-320C

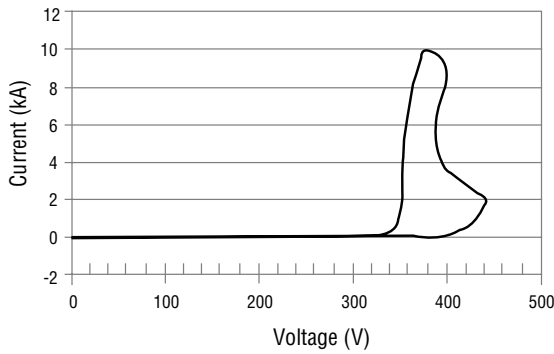


Surge Response (1.2/50, 8/20 Surge) - PTVS10-320C

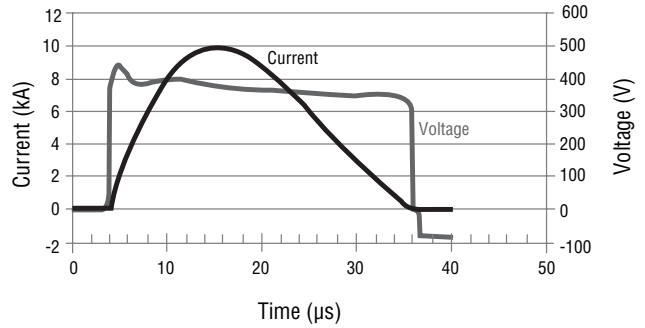


Surge Response - PTVS10-380C

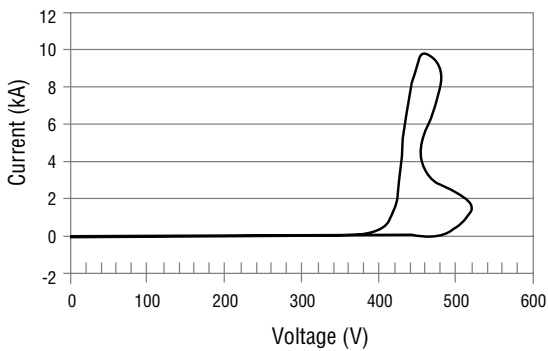

Surge Response (1.2/50, 8/20 Surge) - PTVS10-380C

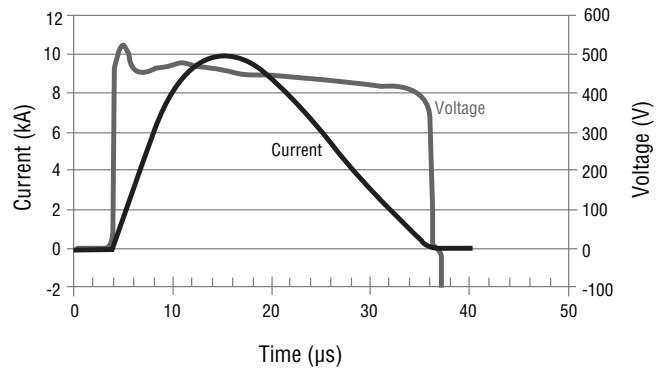

Surge Response - PTVS10-470C

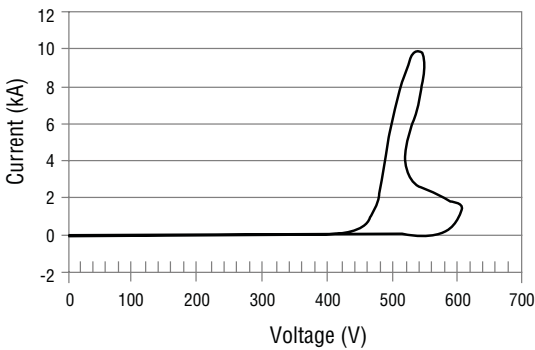

Surge Response (1.2/50, 8/20 Surge) - PTVS10-470C

