


Extended length is with 500g of force

P1	COLOR
1	WHITE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BLUE
8	BROWN

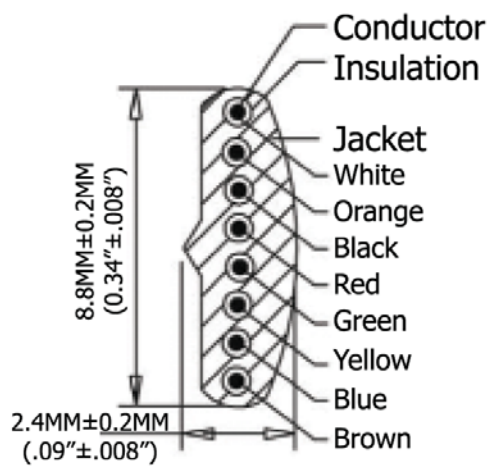

**Material:**

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50µm of Selective Gold Contact Plating
  - Area, Gold flash over the remainder
  - Over 2.54µm[.000100] thick nickel underplate
- Conductor(X8C): 26AWG (0.12X12) Bare Copper
- Insulation(X8C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

**Electrical:**

- Voltage rating: 30V (DC)

Extended Length ("L2")	Typical Retracted Length ("L1")
84.0 Inches - 96.6 Inches	39.5 Inches
2,133.6MM-2,453.64MM	1,003.3MM

**SEC: A-A**



Scale	1:1						Name	Item No.
TOLERANCE							Chappell	<b>AT-C-26-8/8/B-7-OE</b>
X.X	±0.40				Drawn	11.02.11		
X.XX	±0.25				Approved			<b>Title</b> NON-UL 26AWG (0.12X12)*8C, O.D.: 2.4*8.8MM, Single Plug, 50µm of contact plating, BLACK
X.XXX	±0.15							Drawing No.
Angle	±3°							<b>rev00</b>
								Replace
								Sheet

