

Fiber optic coupling - VS-PPC-J-1-SCRJ-MNBK - 1405206

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

SCRJ push-pull coupling, IP67, metal, with protective cover, color: nickel-plated



SCRJ push-pull coupling



Ethernet

Key commercial data

Packing unit	1 PCE
GTIN	 4 046356 332804
Custom tariff number	85366990
Country of origin	GERMANY

Technical data

Mechanical characteristics

Number of positions	2
Fiber type	GOF, HCS, POF
Color	silver
Ambient temperature (operation)	-40 °C ... 70 °C

Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
Degree of protection	IP67

Material data

Housing material	Zinc die-cast
Material	Metal

Electrical characteristics

Number of positions	2
---------------------	---

Fiber optic coupling - VS-PPC-J-1-SCRJ-MNBK - 1405206

Classifications

ETIM

ETIM 3.0	EC001134
ETIM 4.0	EC001134
ETIM 5.0	EC001134

UNSPSC

UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501
UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260708
eCl@ss 7.0	27440312
eCl@ss 8.0	27440312

Approvals

Approvals


Approvals

UL Listed

Ex Approvals

Approvals submitted


Approval details

UL Listed 

Fiber optic coupling - VS-PPC-J-1-SCRJ-MNBK - 1405206

Drawings

Dimensioned drawing

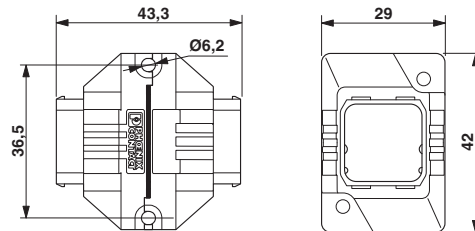

SCRJ push-pull coupling