

NOTES:

1. MATERIALS AND FINISHES:
 BODY, OUTER CONTACT,
 CONTACT & COUPLING NUT - BRASS, SILVER PLATING
 INSULATOR - PTFE, NATURAL
 GASKET - SILICONE RUBBER, RED

2. ELECTRICAL:
 A. IMPEDANCE: 50 OHM
 B. FREQUENCY RANGE: DC 0-11 GHz
 C. DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS, MIN.



3. MECHANICAL:
 A. DURABILITY: 500 CYCLES MIN.
 B. TEMPERATURE RANGE: -65 C TO +165 C

4. PACKAGING:
 A. QUANTITY: SINGLE PACK
 B. MARKING: BAG TO BE MARKED
 "AMPHENOLRF, 82-100, AND DATE CODE"

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
U	REDRAWN IN PRO-E \RD-DA09102101T	17-Dec-09	47700	SH
V	STAMP "AMPHENOL" WAS "74868" \RD-DM1120601R3	26-Dec-11	48845	SH
W	ADDING 349 SPEC AND DUAL BOM'S	12-May-14	49957	SH

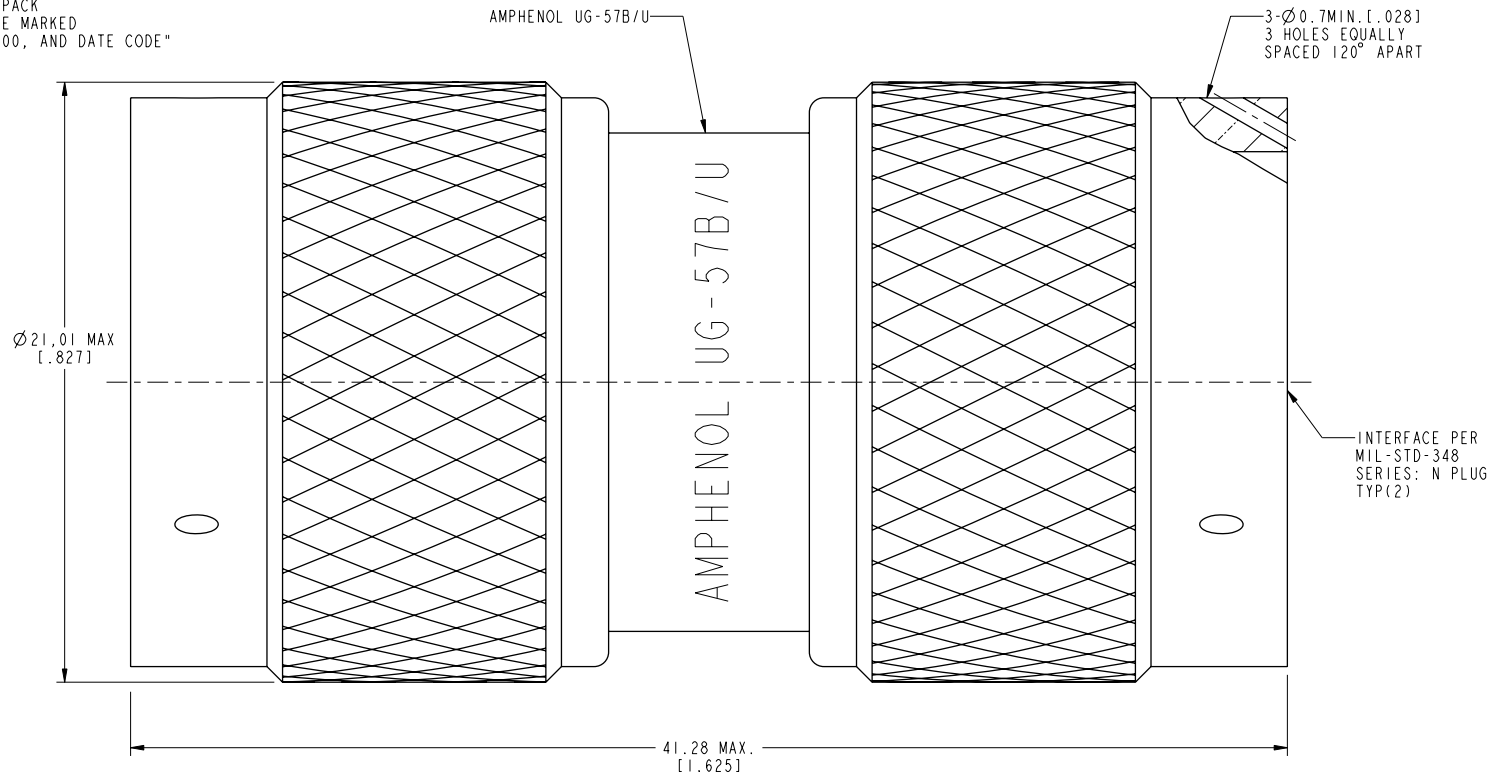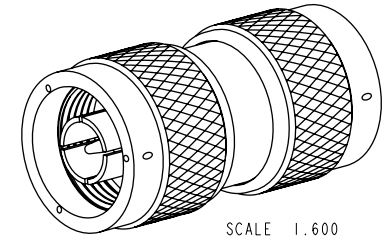

CUSTOMER OUTLINE DRAWING
 ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ±0.05mm 0.5 - 6mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ±0.3mm ANGLES ±1°	MATERIAL	DRAWN	DATE	TITLE "N" ADAPTOR FOR UG-57B/U		Amphenol RF www.amphenolrf.com		
	SEE NOTES	M. DONG	12-May-14					
	REFERENCE	ENGINEER	DATE	SCALE: 5.5:1.0 SHEET 2 OF 2		DRAWING NO.82-100		
	EAR # AND MS15507	D. ROYCE	01-Jan-88					
CONFIGURATION LEVEL: □□□□	APPROVED	DATE	DWG SIZE B		REV W		ITEM NO.82-100	
FINISH	S. HSEIH	12-May-14						
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	CAD FILE			PART NO.82-100				