


MATERIALS AND FINISHES

SMA PLUG: SEE SD-73251-489

CABLE: TEMP-FLEX 1000540008

SHRINK TUBE: VERSAFIT OR EQUIVALENT

LABEL : BRADY PERMASLEEVE

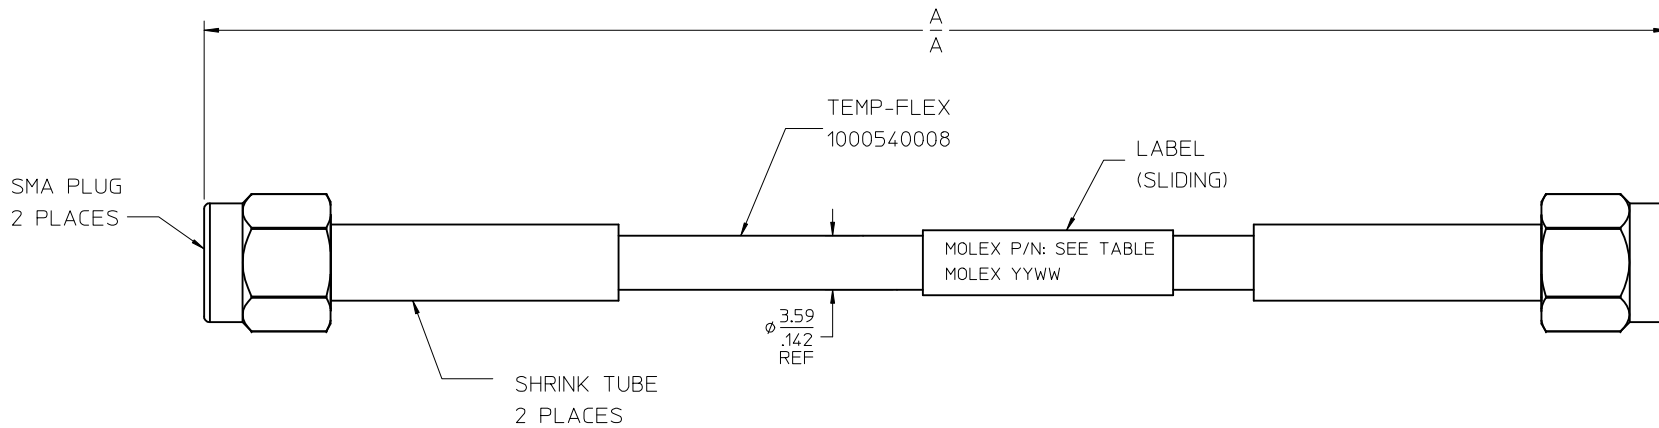

89762-1373	19.685±.492	500.00±12.5	1.10
89762-1372	120.000±2.00	3048.00±50.80	7.00
89762-1371	12.00±.200	304.80±5.08	0.70
89762-1370	6.000±.150	152.40±3.81	0.40
PART NO.	IN	MM	INSERTION LOSS MAX TO 26 GHZ (dB)
DIM A			

MAX VSWR 1.35 TO 26 GHZ

CHG: CHANGED CABLE TYPE TO 1000540008 (PFA 141 AC)
 EC NO: URF2017-0259
 DRAWN:PSWAM102 2016/12/26
 CHKD:BBB 2016/12/26
 APPR:AROBERTSON 2017/01/16
 REV: A5

QUALITY SYMBOLS
 ▼=0
 ▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .---	± .---
3 PLACES	± .---	± .010
2 PLACES	± 0.25	± .---
1 PLACE	± .---	± .---

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM/IN

DRAWN BY: JLEE02 DATE: 2013/03/27
 CHECKED BY: SSS DATE: 2013/03/27
 APPROVED BY: JWIENER DATE: 2013/08/29

MATERIAL NO. SEE TABLE

SCALE: DESIGN UNITS METRIC

THIRD ANGLE PROJECTION

TITLE: SMA PLUG ST X2 ON TF 1000540008 CABLE EWR-10382-A, CA-SMA/SMA

MOLEX MOLEX INCORPORATED

DOCUMENT NO. SD-89762-137 SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION