

Marshalling panel - RVS 10-TP(2,4X0,8)L - 3192038

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Marshalling panel, Nom. voltage: 250 V, Nominal current: 5 A, Cross section: 0.22 mm² - 0.56 mm², AWG: 20 - 24, Connection type: TERMI-POINT, Width: 6.2 mm, Length: 202 mm, Color: gray, Assembly: NS 35/7,5, NS 35/15

Product Features

- ✓ The red-white marking masks with alternating negative/positive 1 - 10 or a - k labeling clearly distinguish the rows of pins and make the process of connecting and finding specific connections much easier
- ✓ The external housing ridges act as a cable duct side panel, such that good cable routing is ensured and standard cable duct covers can be used
- ✓ The RVS 10 element has ten 2.4 x 0.8 mm TERMI-POINT[®](TP) pins for the incoming and outgoing conductors on both sides of the raised labeling rib



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 093600
Weight per Piece (excluding packing)	68.64 g
Custom tariff number	85369010
Country of origin	Poland

Technical data

General

Number of levels	1
Number of connections	20
Color	gray
Insulating material	PA
Flammability rating according to UL 94	V2
Rated surge voltage	4 kV
Pollution degree	3
Overvoltage category	III

Marshalling panel - RVS 10-TP(2,4X0,8)L - 3192038

Technical data

General

Insulating material group	I
Nominal current I_N	5 A
Max. load current	5 A
Nominal voltage U_N	250 V
Open side panel	nein
Number of positions	1

Dimensions

Width	6.2 mm
Length	202 mm
Height NS 35/7,5	81.5 mm
Height NS 35/15	89 mm

Connection data

Conductor cross section solid min.	0.22 mm ²
Conductor cross section solid max.	0.56 mm ²
Conductor cross section flexible min.	0.22 mm ²
Conductor cross section flexible max.	0.56 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	20
Connection method	TERMI-POINT®
TERMI-POINT pin dimensions	2.4 x 0.8 mm
Position of the TERMI-POINT pin	vertical

Standards and Regulations

Flammability rating according to UL 94	V2
--	----

Classifications

eCl@ss

eCl@ss 4.0	27141124
eCl@ss 4.1	27141124
eCl@ss 5.0	27141124
eCl@ss 5.1	27141124
eCl@ss 6.0	27141124
eCl@ss 7.0	27141124
eCl@ss 8.0	27141120

Marshalling panel - RVS 10-TP(2,4X0,8)L - 3192038

Classifications

ETIM

ETIM 2.0	EC000897
ETIM 3.0	EC000897
ETIM 4.0	EC000897
ETIM 5.0	EC000897

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39121410

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted


Approval details

EAC

Drawings

Marshalling panel - RVS 10-TP(2,4X0,8)L - 3192038

Functional drawing

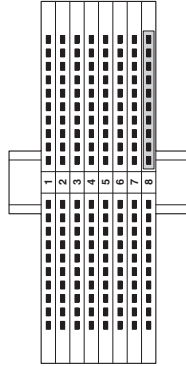

Dimensional drawing

