


REVOLUTIONS		DATE	DWN	APVD
F	LTR	DESCRIPTION		
B	REV PER	ECIO 09-021447	7-21-09	CT KT

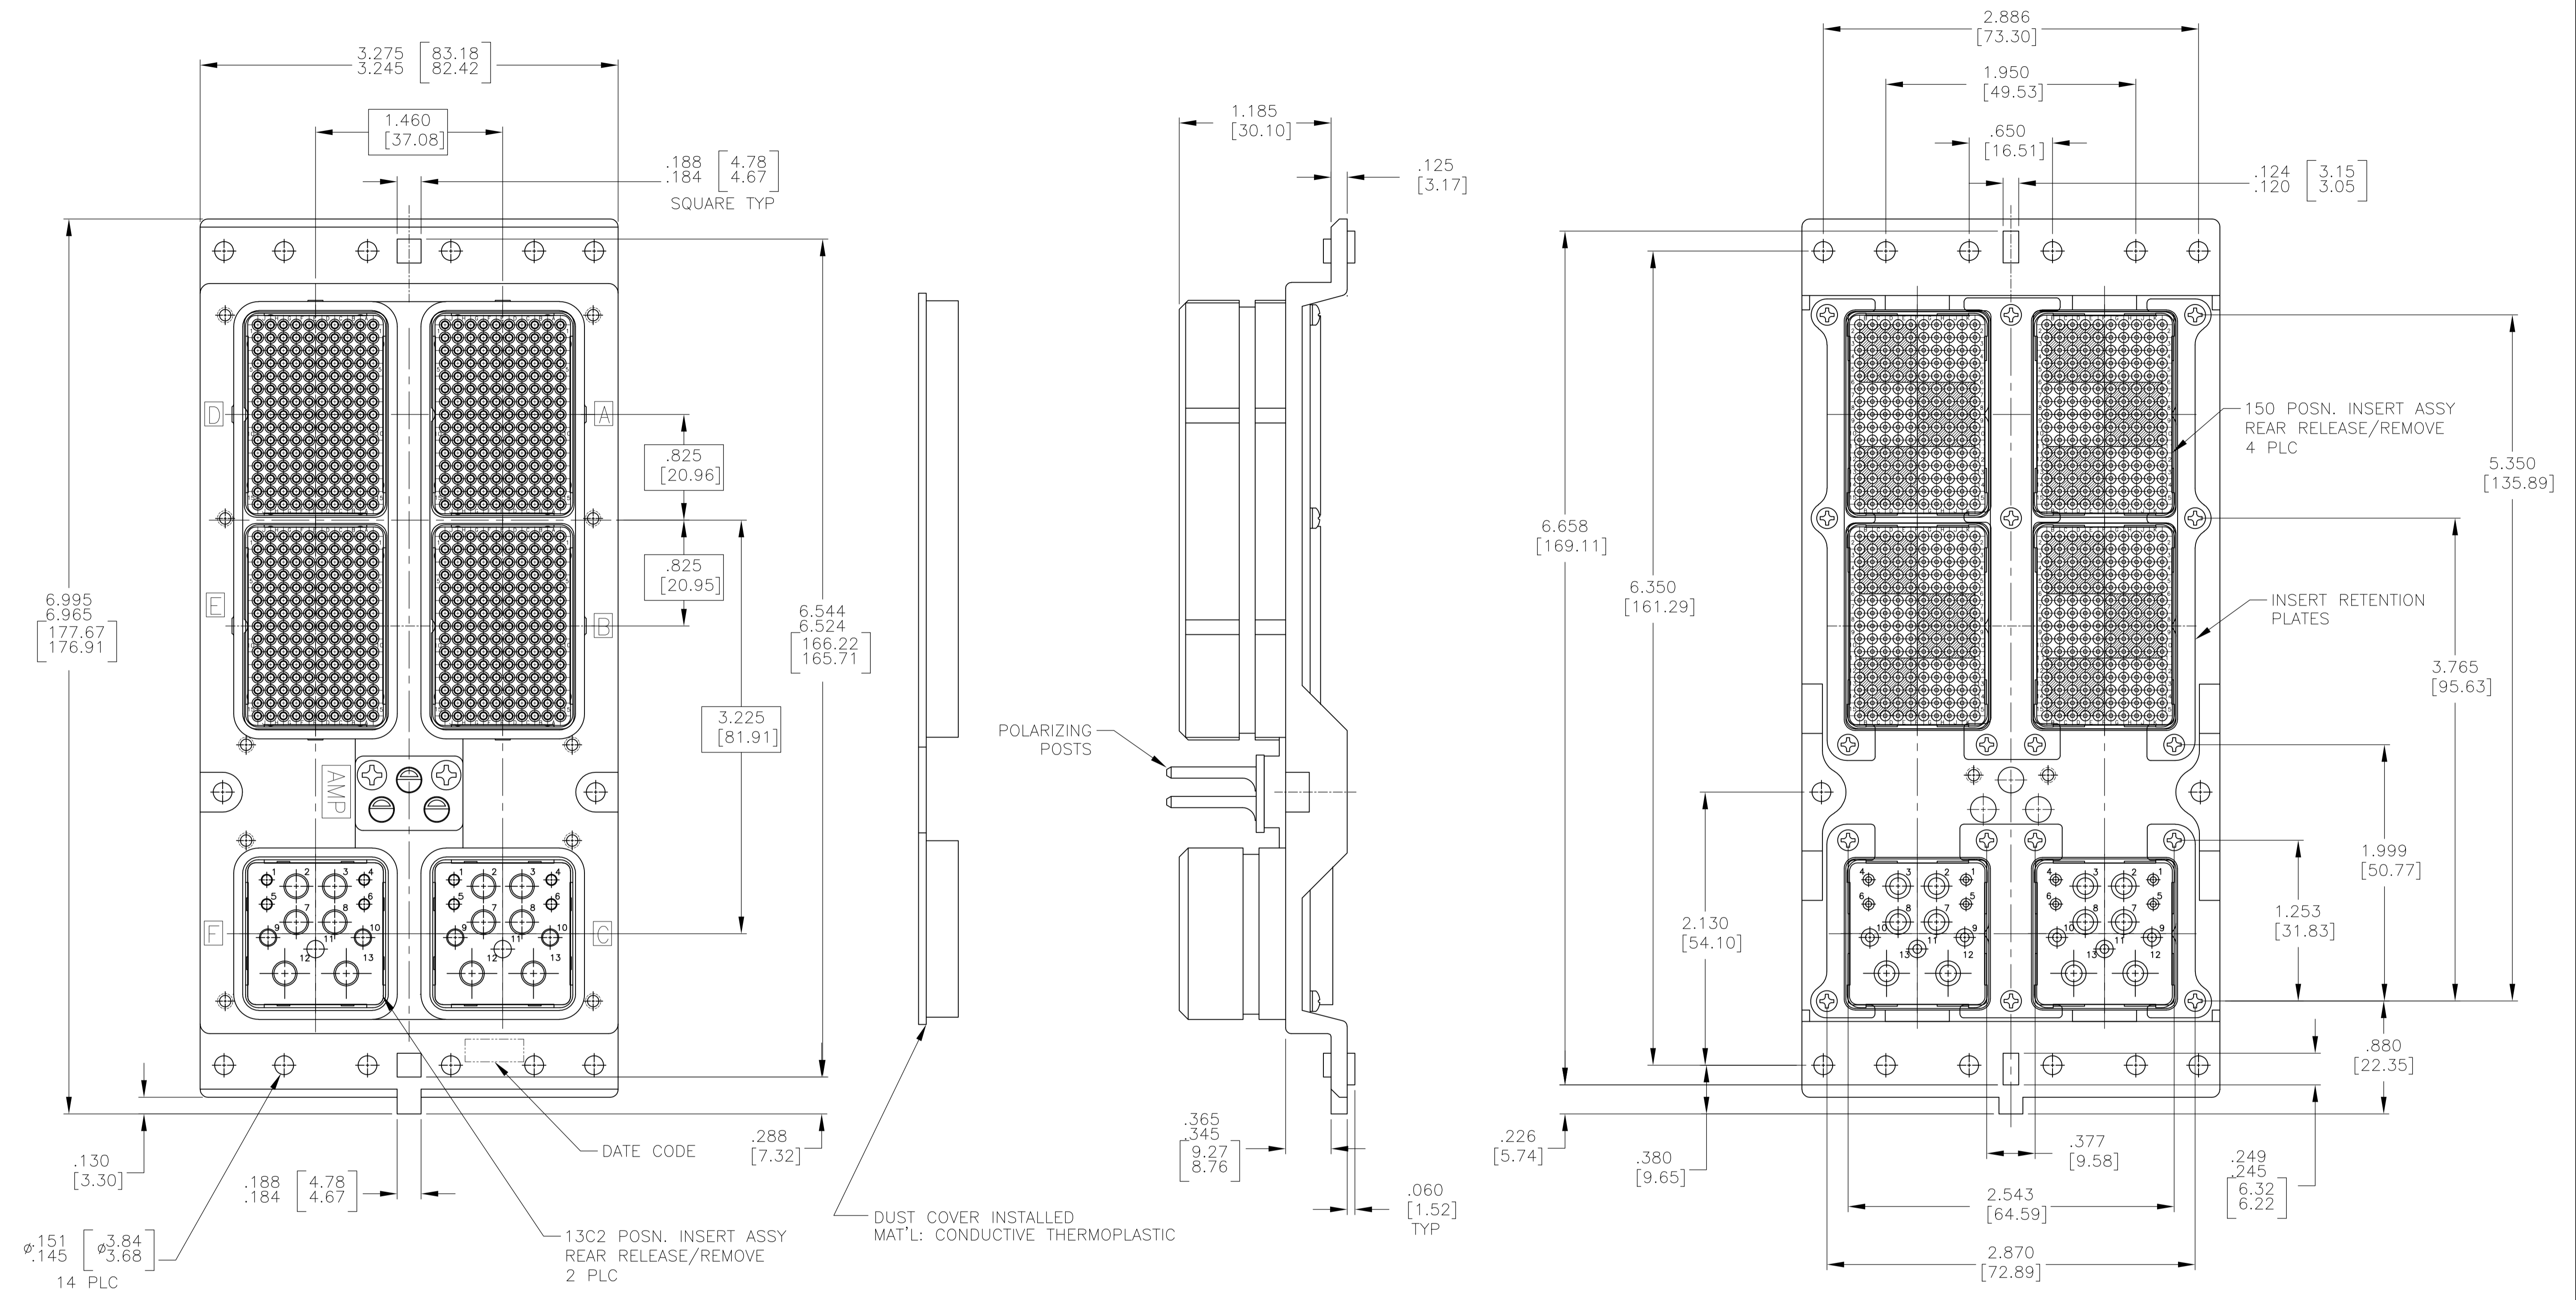

- CONNECTOR DIMENSIONS ARE PER ARINC 600 SPECIFICATION
- DUST COVER INSTALLED FOR SHIPPING. QTY = 2
- KEYING SHOWN IN POSITION "01" FOR REFERENCE ONLY. SEE TABLE FOR KEYING POSITION. FOR POSITION "00" KEYING SHIPPED UNASSEMBLED.

COMPONENT	MATERIAL	FINISH
SHELL	DIE CAST ALUMINUM PER ASTM-B-85	ELECTROLESS NICKEL PER MIL-C-26074, CLASS 4, GRADE B
INSERT RETENTION PLATES	ALUMINUM ALLOY PER ASTM-B-209	ELECTROLESS NICKEL PER MIL-C-26074, CLASS 4, GRADE B
SCREWS AND LOCKWASHERS	STEEL OR STAINLESS STEEL	CHROMATE OVER ZINC OR PASSIVATED
POLARIZING POSTS	ZINC ALLOY PER ASTM-B-86	ELECTROLESS NICKEL PER MIL-C-26074, CLASS 4, GRADE B
POLARIZING POST RETAINING PLATE	ALUMINUM ALLOY PER ASTM-B-209	BLUE ANODIZED PER MIL-A-8625
ALL INSERTS	THERMOSET	-

"01"	MODULE A,B,D & E 208262-3 (#22 PIN CONTACT; QTY=600)	2101253-1
	MODULE C & F 208273-2 (#12 SOCKET CONTACT; QTY=12) 208270-2 (#16 SOCKET CONTACT; QTY=6) 208267-2 (#20 SOCKET CONTACT; QTY=8)	
KEYING POSITION	CONTACTS INCLUDED WITH CONNECTOR NOT INSTALLED	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN C.C.THOMAS 6-23-09	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES (mm)		CHK K.THACKSTON 6-23-09	NAME K.THACKSTON 6-23-09	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		
0 PLC ± -		APPLICATION SPEC		
1 PLC ± -		SIZE CASE CODE DRAWING NO		
2 PLC ± -		A1 00779 C=2101253		
3 PLC ± .005 (0.13)		RESTRICTED TO		
4 PLC ± -		WEIGHT -		
ANGLES ± -		CUSTOMER DRAWING		
MATERIAL SEE TABLE		FINISH SEE TABLE		SCALE 1.5:1 SHEET 1 OF 1 REV B