

## WR-DA-PG21


Order No.: 1686698

The illustration shows the version WR-DI-PG 21 and WR-DA-PG21

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1686698>

Seal, outside, to increase the protection type, size Pg21

### Commercial data

GTIN (EAN)	 4 017918 190026
sales group	D096
Pack	5 pcs.
Customs tariff	39269097
Catalog page information	Page 557 (PC-2009)

### Product notes

WEEE/RoHS-compliant since:  
10/31/2006

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Pg screw connection	21
---------------------	----

## Diagrams/Drawings

Dimensioned drawing

### Assembly instructions for Pg21 corrugated pipe


a = Corrugated screw connection

B = Corrugated pipe

c = Opener

#### Installation note:

Cut the corrugated pipe in the groove to retain a round shape for insertion. The lighter seal (not depicted in the illustration) is positioned in the corrugated pipe screw connection below the safety latch. The darker outer seal (not depicted in the illustration) is placed over the corrugated pipe screw connection from outside. The corrugated pipe is then pushed as far as possible into the corrugated pipe screw connection and clicks into place. The screw connection is opened by placing the yellow corrugated pipe opener with force between the safety latch and the corrugated tube and the corrugated pipe is then pulled out.

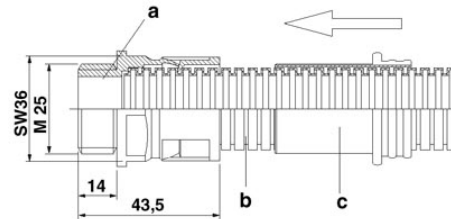

### Assembly instructions for M25 corrugated pipe

a = Corrugated screw connection

b = Corrugated pipe

c = Opener

#### Installation note:

Cut the corrugated pipe in the groove to retain a round shape for insertion. The lighter seal (not depicted in the illustration) is positioned in the corrugated pipe screw connection below the safety latch. The darker outer seal (not depicted in the illustration) is placed over the corrugated pipe screw connection from outside. The corrugated pipe is then pushed as far as possible into the corrugated pipe screw connection and clicks into place. The screw connection is opened by placing the yellow corrugated pipe opener with force between the safety latch and the corrugated tube and the corrugated pipe is then pulled out.

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;