
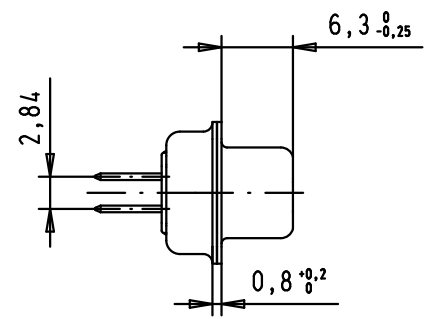


5 4 3 2 1

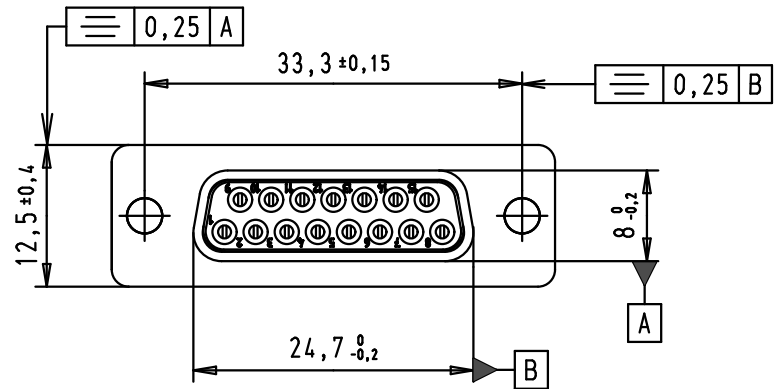


SPECIFICATION: C Filter



Performance level	PL2
Capacitance	1000pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

Minimum insertion loss


FREQUENCY (MHz)	ATTENUATION (dB)
5	1dB
10	3dB
50	12dB
100	20dB
500	34dB
1000	30dB

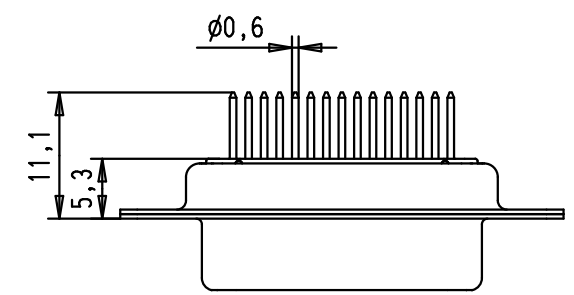

PCB Layout Component side

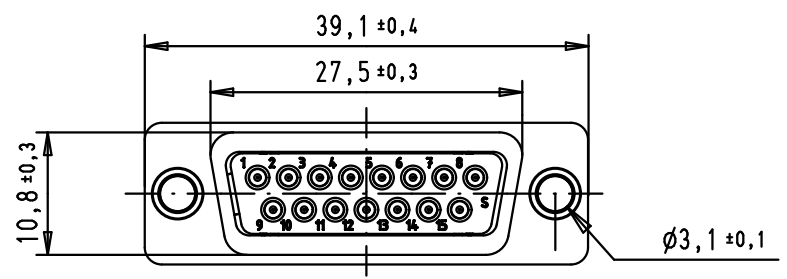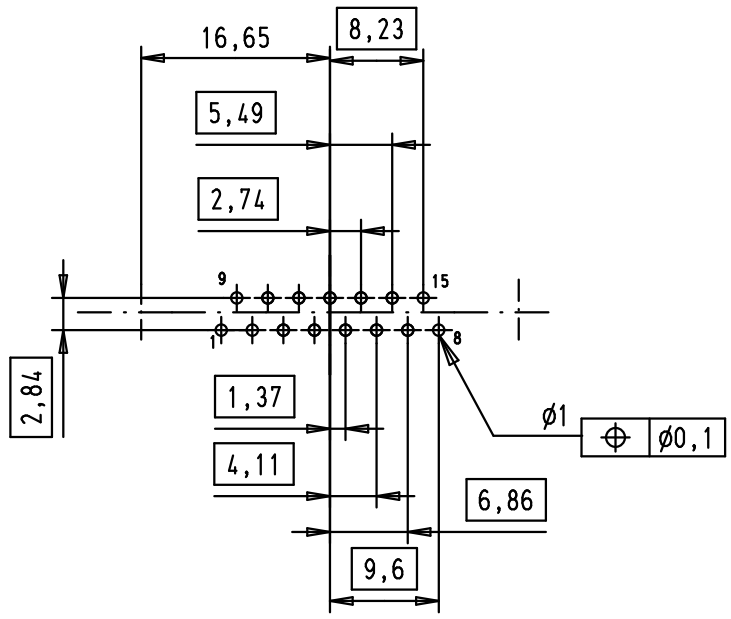

Mod.	Dat.	Name	Detail.	Dat.	Name
			Insp.	8-JUL-02	CV
			Stand.	09/12/11	JB
36283	09/12/11	SD			
31570	07/11/03	AF			
31058	8-JUL-02	CV			



All Dim. in mm
Orig. Size DIN A 4

D-Sub, female, straight,
15 Poles, with turned
solder pin and hole

Ma?Mstab/
Scale
1.5:1

HARTING EURL
F-95972 Paris



TB 09642127230

Blatt/ Page
1 / 1

Sub.