

REVISIONS				
EC NO	DATE	REV	DESCRIPTION	CHANGER
	2016.12.24	A	INITIAL RELEASE.	DICK

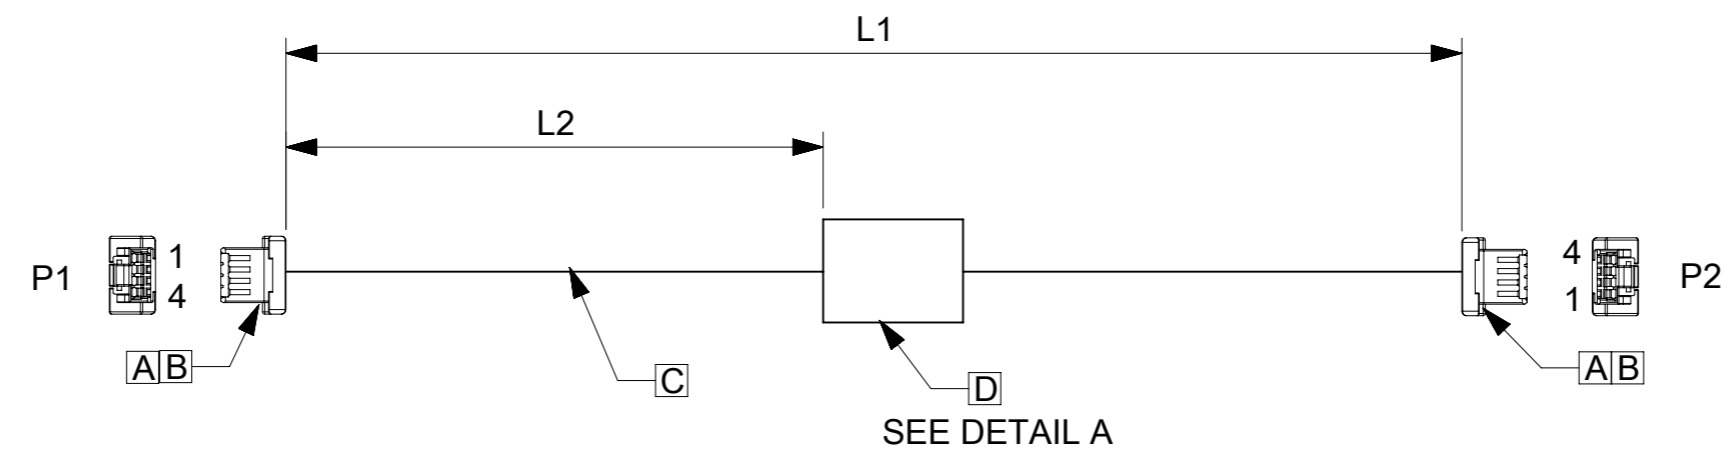


TABLE			
PART NUMBER	L1	L2	TITLE
151350400	50±5	18REF	Clickmate 4 Circuit 50MM
151350401	100±8	44REF	Clickmate 4 Circuit 100MM
151350402	150±10	69REF	Clickmate 4 Circuit 150MM
151350403	300±10	144REF	Clickmate 4 Circuit 300MM
151350405	450±15	219REF	Clickmate 4 Circuit 450MM
151350406	600±15	294REF	Clickmate 4 Circuit 600MM

P/N:15135XXXX—MOLEX PN  
MOLEX

DETAIL A

NOTES

1. THIS PRODUCT MUST MEET 2011/65/EU ROHS COMPLIANCE.  
此产品需符合 2011/65/EU ROHS环保要求.
2. ELECTRICAL PERFORMANCE REFER TO ES-000.  
电气特性参考ES-000.
3. LABEL TEXT MUST BE 2mm MAX. IN HEIGHT WITH ARIAL FONT.  
标签字高最大2mm,字体ARIAL.
4. STICK UL LABEL ON THE OUTSIDE CARTON.  
外箱上贴UL标签.

ITEM	DESCRIPTION	L(MM)	Q'TY
D	Blank label 12.7x35.5mm (WHT:12.7mm) HF		1
C	24AWG;PLATED;PVC;BK;OD=1.10MM;UL1061	A/R	
B	1.5 W/B Single Plg Term Chain W/Plt ,Tin Plating		8
A	1.5 W/B Single Plug Hsg 4Ckt Beige		2

WIRING CHART		
P1	P2	COLOR
1	4	BLACK
2	3	BLACK
3	2	BLACK
4	1	BLACK

<b>QUALITY SYMBOLS</b> 	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				<b>mm</b> <b>NTS</b>		
	EC NO: 111920 DRWN: WLXIE CHK'D: DHUANG16 APPR: YXZOU	<b>GENERAL TOLERANCES (UNLESS SPECIFIED)</b> ANGULAR TOL ± °		DRWN BY: WLXIE DATE: 2016/11/18			
		4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±		CHK'D BY: DHUANG16 DATE: 2016/12/23	<b>PRODUCT CUSTOMER DRAWING</b>		
	<b>DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</b>	A3	APPR BY: YXZOU DATE: 2017/01/10	SERIES: 201234 MATERIAL NUMBER: SEE TABLE CUSTOMER: GENERAL MARKET	DOCUMENT NUMBER: 2012341675 DOC TYPE: PSD DOC PART: 000 SHEET NUMBER: 1 OF 1		