


A
B
C
D
E
F
G
H

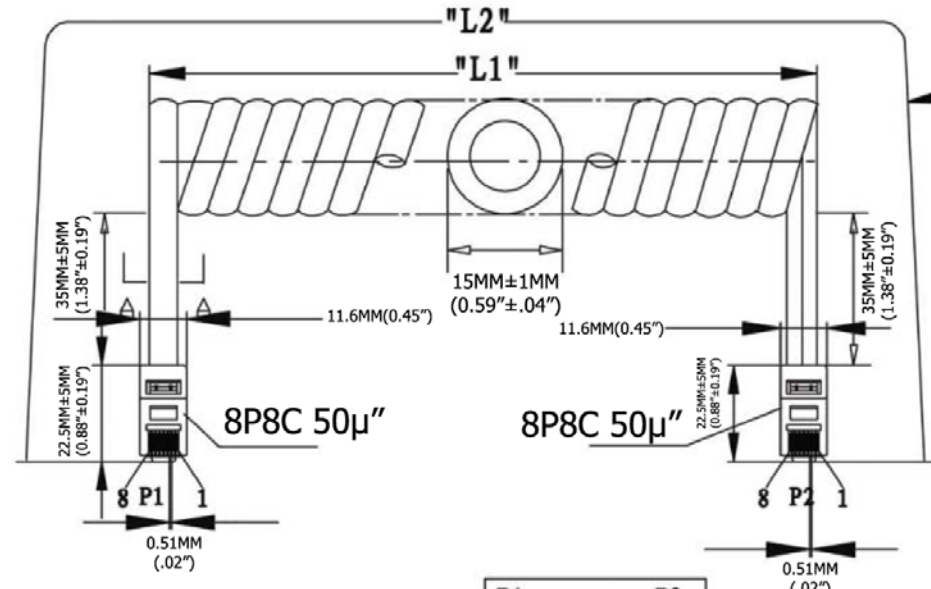


Extended length is with 500g of force

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µm[.000100] thick nickel underplate
- Conductor(X8C): 26AWG (0.12X12) Bare Copper
- Insulation(X8C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

Electrical:

- Voltage rating: 30V (DC)

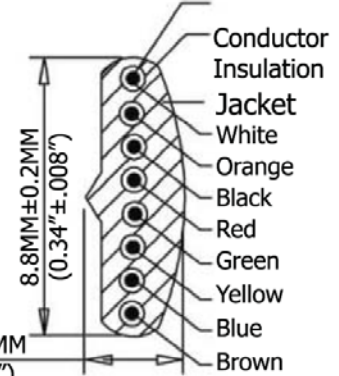

P1	P2
1	WHITE
2	ORANGE
3	BLACK
4	RED
5	GREEN
6	YELLOW
7	BLUE
8	BROWN

8.8MM±0.2MM (0.34"±.008")

SEC: A-A

Extended Length ("L2")	Typical Retracted Length ("L1")
168.0 Inches - 193.2 Inches	75.0 Inches
4,267.2MM-4,907.28MM	1,905.0MM



Scale	1:1						Name	Item No. AT-C-26-8/8/S-14/R
TOLERANCE					Drawn	11.02.11	Chappell	
X.X	±0.40				Approved			Title NON-UL 26AWG (0.16/7)*8C, O.D.: 2.4*8.8MM, Reverse Plug, 50µ" of contact plating, SILVER
X.XX	±0.25							
X.XXX	±0.15							Drawing No.
Angle	±3°							
								Replace
								Sheet

