

## EMC housing - HC-B 10-TFQ-70/O1STM32G-EMV - 1642386


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



HEAVYCON sleeve housing B10, for double locking latch, height 70 mm, with thread M32, straight cable outlet, EMC version



### Key commercial data

Packing unit	1 PCE
GTIN	 4 046356 028448
Custom tariff number	85389099
Country of origin	CZECH REPUBLIC

### Technical data

#### General data

Note	For contact inserts HC-B10, BB18, DD42, M, K8/24
Design	B10
Height	70 mm
Width	43 mm
Length	73 mm
Housing type	Sleeve housings
Locking type	For double locking latch
No. of cable exits	1
Cable exit	Straight
Screw connection	None
Type of the screw connection	1x M32
Degree of protection for housing	IP65
Ambient temperature (operation)	-40 °C ... 100 °C
Housing material	Aluminum, die-cast

# EMC housing - HC-B 10-TFQ-70/O1STM32G-EMV - 1642386

## Technical data

### General data

Housing surface material	EMC coating, silver
--------------------------	---------------------

## Classifications

### ETIM

ETIM 3.0	EC000437
ETIM 4.0	EC000437
ETIM 5.0	EC000437

### UNSPSC

UNSPSC 11	31261502
UNSPSC 12.01	31261502
UNSPSC 13.2	31261502
UNSPSC 6.01	31261502
UNSPSC 7.0901	31261502

### eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209

## Accessories

### Accessories

Cable gland - HC-EMV-KV-M32(11-21) - 1690529




EMC screw connection up to 5 bar, thread length: 9 mm, cable diameter: 11.0 - 21.0 mm, WAF 36, screw connection: M32


## Drawings

# EMC housing - HC-B 10-TFQ-70/O1STM32G-EMV - 1642386

Diagram

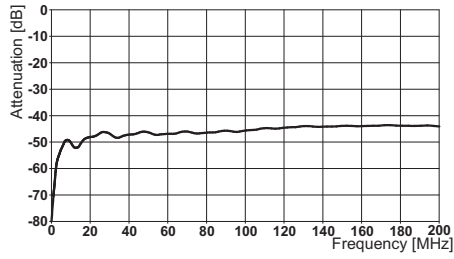

Dimensioned drawing

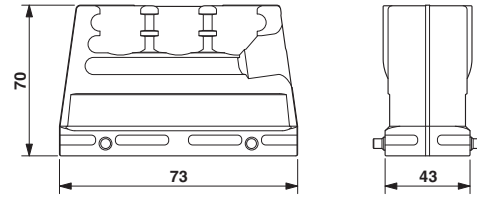

Shield attenuation

---

© Phoenix Contact 2013 - all rights reserved  
<http://www.phoenixcontact.com>