



DIMENSIONS:	
A	3.750" ±0.063
B	4.000" ±0.125
C	4.563" ±0.063
D	3.000" ±0.063
E	2.813" ±0.063
G	0.203" x 0.375" ±0.015

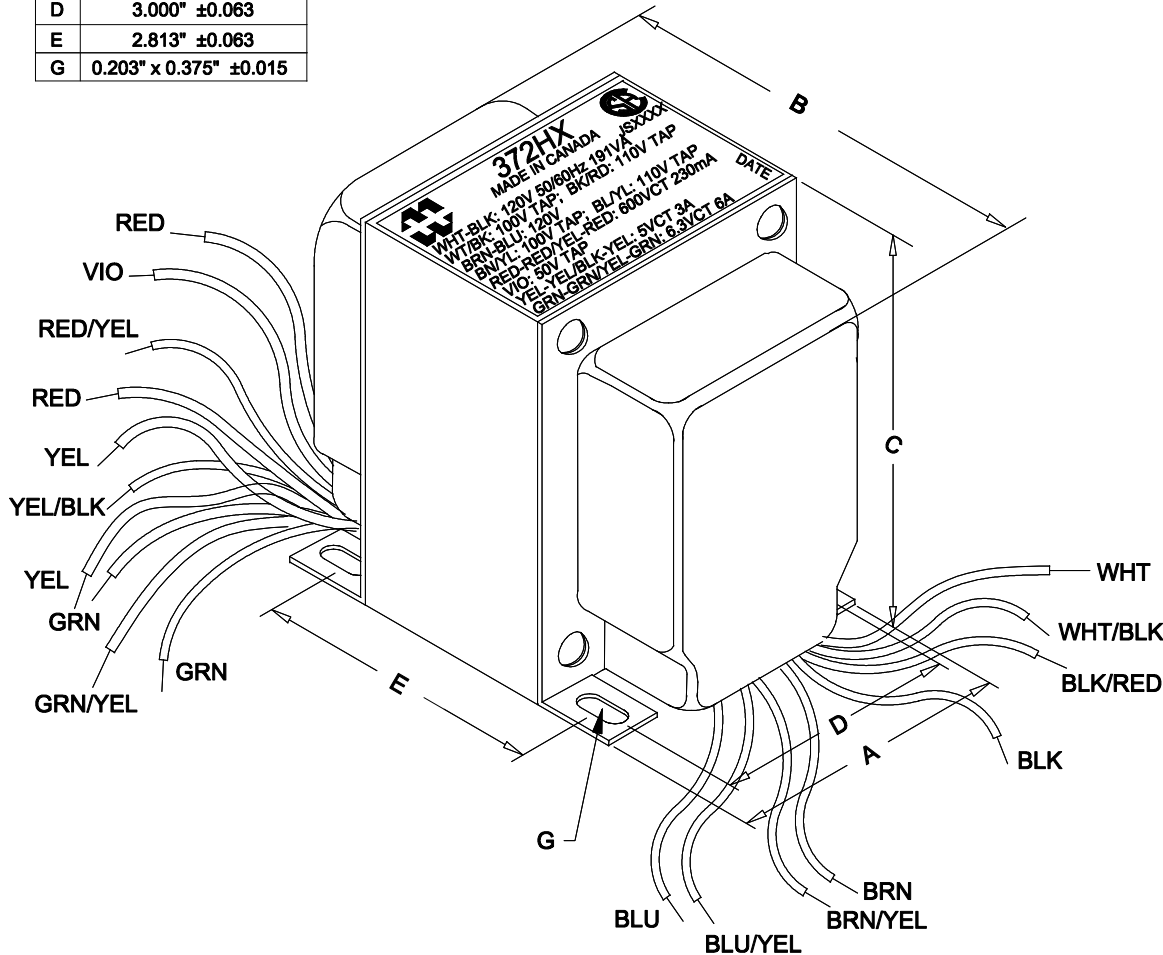

NOTE: ALL LEADS 8" OUT MIN. STRIPPED 0.5"

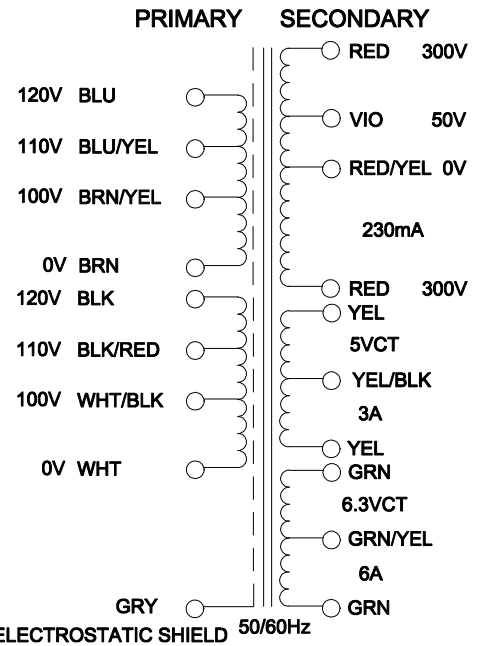

SECONDARY RATED  
VOLTAGES UNDER LOAD

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I <sub>ex</sub>	@ 120V, 60Hz, WHT - BLK	253.2mA	Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK		
	RED - RED =	650.8V	±2%
	RED - RED/YEL = RED/YEL - RED =	325.4V	±2%
	RED/YEL - VIO =	50.00V	±2%
	YEL - YEL =	5.385V	±2%
	YEL - YEL/BLK = YEL/BLK - YEL =	2.692V	±2%
	GRN - GRN =	6.923V	±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.462V	±2%
DCR	@ 20°C, WHT - BLK =	3.652 Ω	±20%
	@ 20°C, BRN - BLU =	3.968 Ω	±20%
	@ 20°C, RED - RED =	77.16 Ω	±20%
	@ 20°C, YEL - YEL =	0.043 Ω	±20%
	@ 20°C, GRN - GRN =	0.046 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE
0	RELEASED.	08/10/12

**HAMMOND**  
**MANUFACTURING**™

**ELECTRONIC DIVISION**  
52 RANKIN PLACE,  
WATERLOO, ONTARIO, N2J 3Z5

PH # (519) 886-6181  
FAX # (519) 886-9540

DWG. BY: C. ILIE  
DATE: 08/10/12

CHK'D BY:  
APP'D. BY:  
DIMENSIONS: IN(X) MM( )

TITLE: POWER TRANSFORMER

DWG. NO. 372HX