


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AF	50	P	LTR	DESCRIPTION	DATE	DWN	APVD
		C		REVISED PER ECR-12-005303	24JUL12	KH	KR

- 1 MATES WITH .032±.001x.205 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .135 MAX DIA
- 4 CONTINUOUS STRIP ON REELS
- △5 DIMENSION DOES NOT INCLUDE TRIM BURR
- △6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

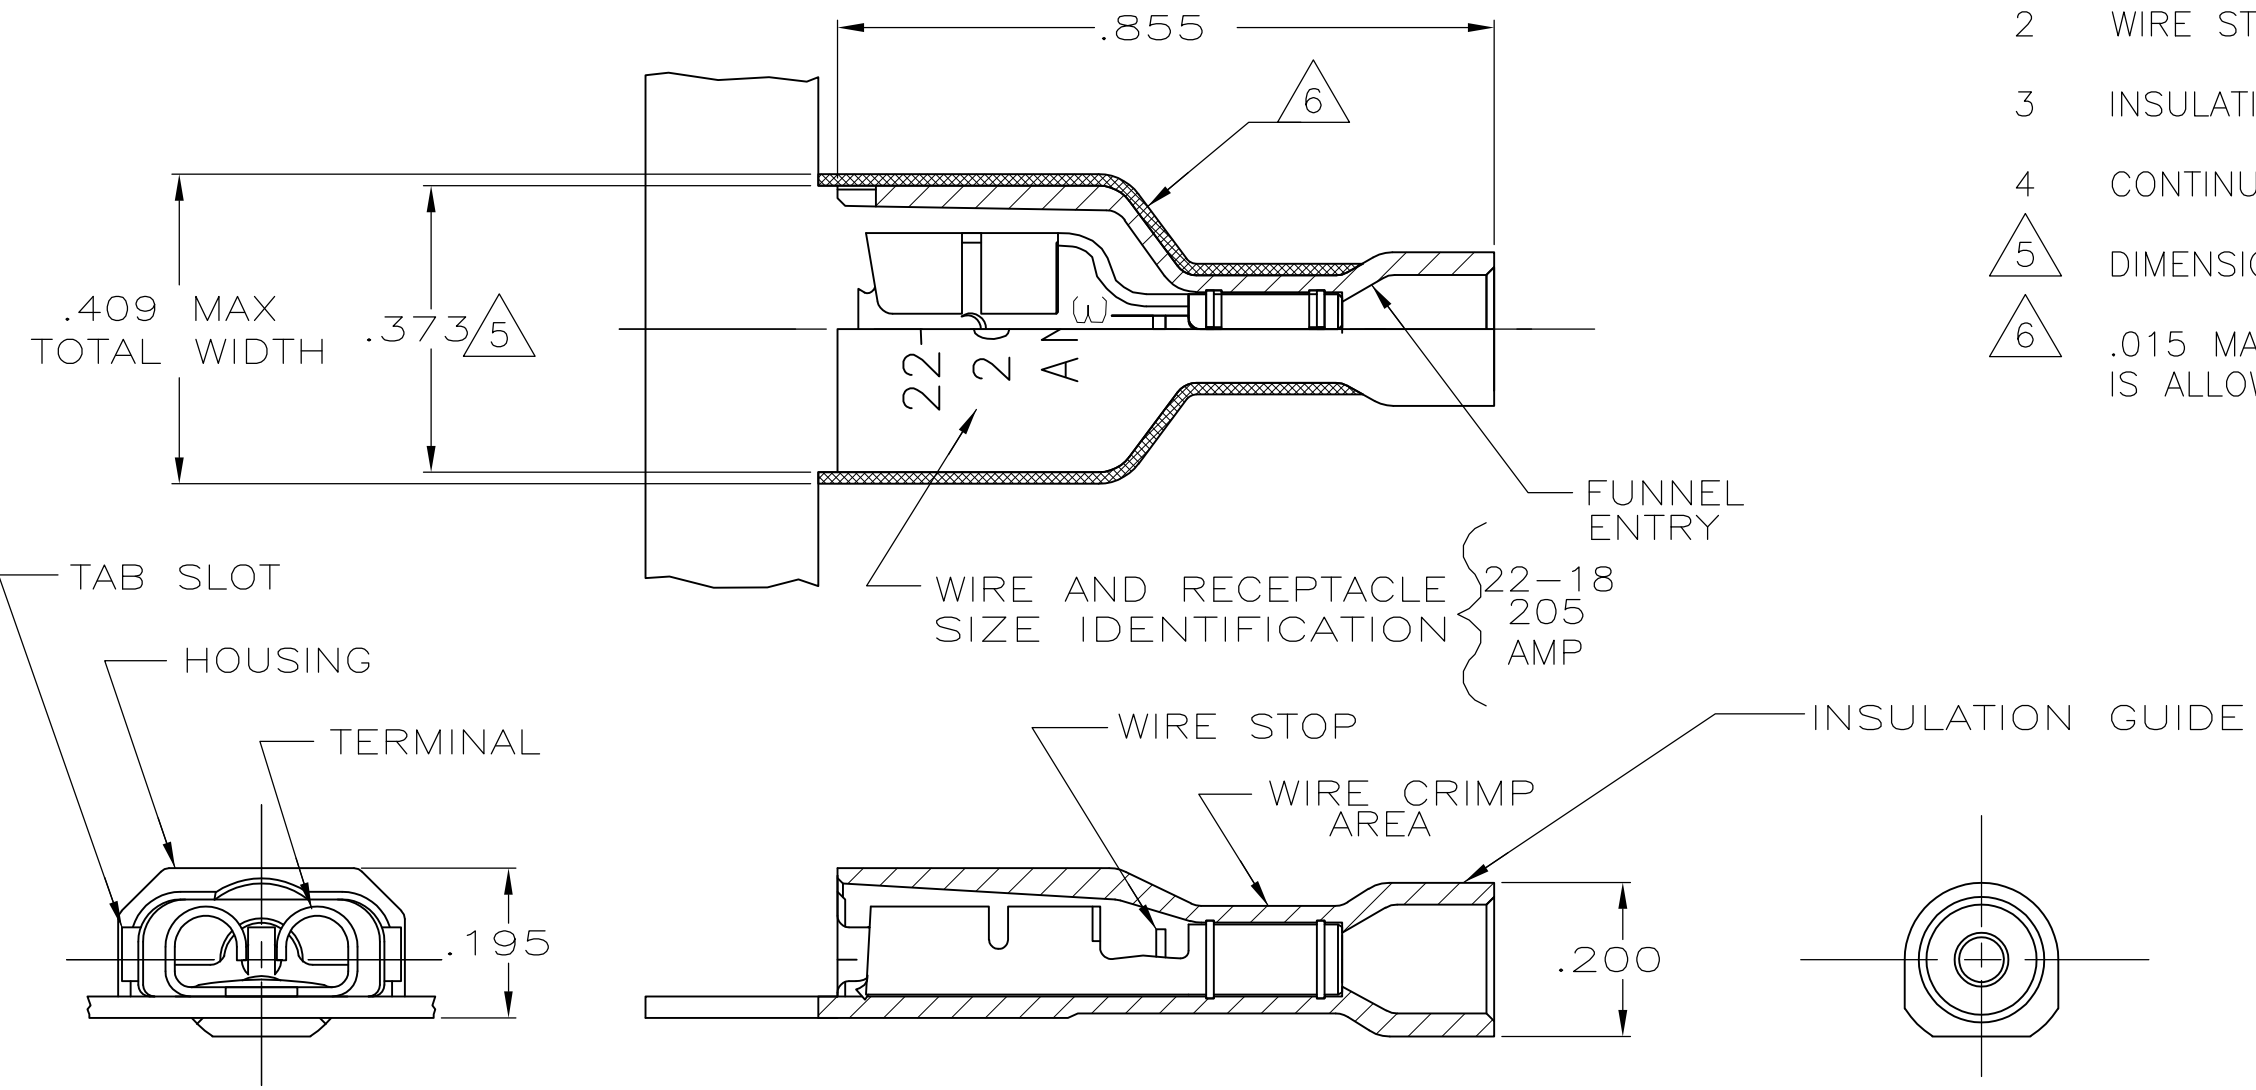

STANDARD	HOUSING: NYLON, COLOR-RED TRANSLUCENT RECEPTACLE: #3 HARD BRASS, TIN	2-521308-2
PACKAGING	MATERIAL & FINISH	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.		TE Connectivity RECEPTACLE ASSY, ULTRA-FAST, .205 SERIES, 22-18 AWG
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	
MATERIAL	FINISH	
SEE TABLE	SEE TABLE	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.38 [.015] 4 PLC ± - ANGLES ± -		DWN JR RUTH 25MAY00 CHK MS FEHER 25MAY00 APVD J HUMMEL 25MAY00 PRODUCT SPEC 108-2043 APPLICATION SPEC 114-2123 WEIGHT - CUSTOMER DRAWING
		NAME SIZE CAGE CODE DRAWING NO RESTRICTED TO A3 00779 C-521308 -
		SCALE 4:1 SHEET 1 OF 1 REV C