

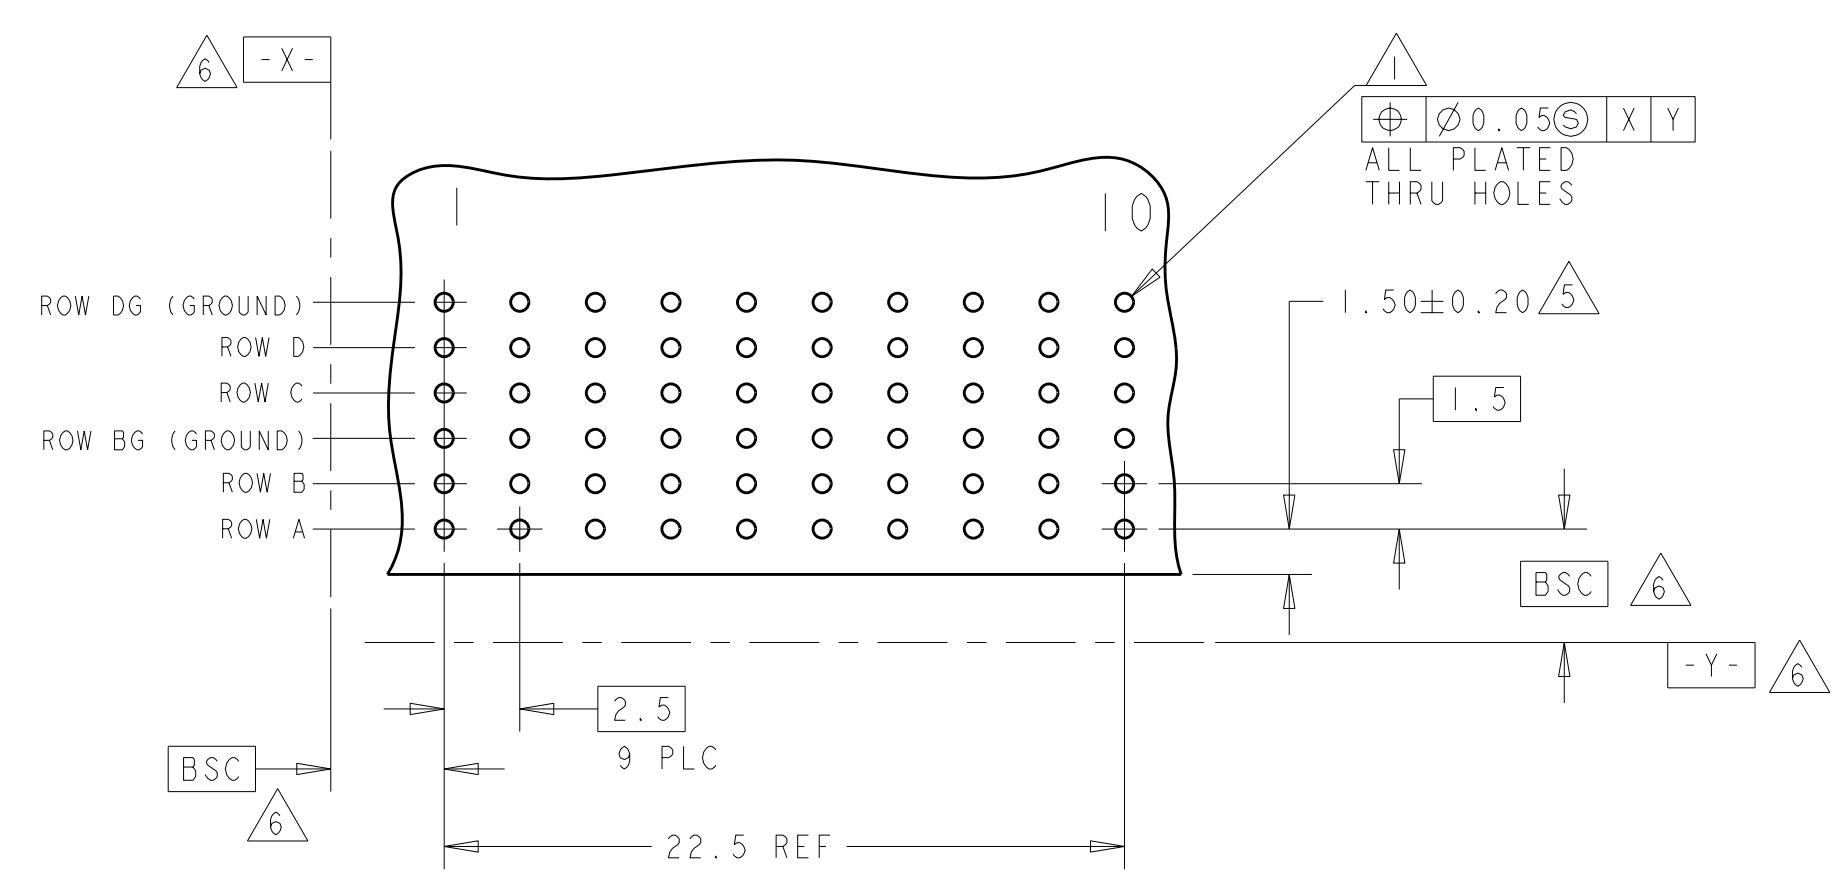


LOC	DIST	REV	DATE	BY	APPD
AD	00	C	13APR2011	RKC	JE
		DESCRIPTION			
		REV PER ECO-11-007577			


- 1 PCB HOLE DIM:
 DRILLED HOLE = 0.700±0.025mm
 FINISHED HOLE = 0.600±0.050mm
 Cu THICKNESS = 0.0375±0.0125mm
 SnPb THICKNESS = 0.007±0.003mm
- 2 MATERIAL:
 CONTACT & SHIELD - PHOSPHOR BRONZE
 HOUSING & CHICKLET - GLASS FILLED POLYESTER
- 3 FINISH: SIGNAL AND GROUND CONTACTS:
 MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF
 PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA
 GR-1217-CORE, APPLICATIONS IN UNCONTROLLED
 ENVIRONMENTS
 COMPLIANT PIN AREA: 0.5µm MIN BRIGHT
 TIN-LEAD OVER BASE PLATING
- 4 CONNECTOR MARKED WITH PART NUMBER AND
 DATE CODE IN APPROXIMATE AREA SHOWN
- 5 DIMENSION APPLIES TO CENTERLINE OF THRU HOLE
- 6 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT.
 TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

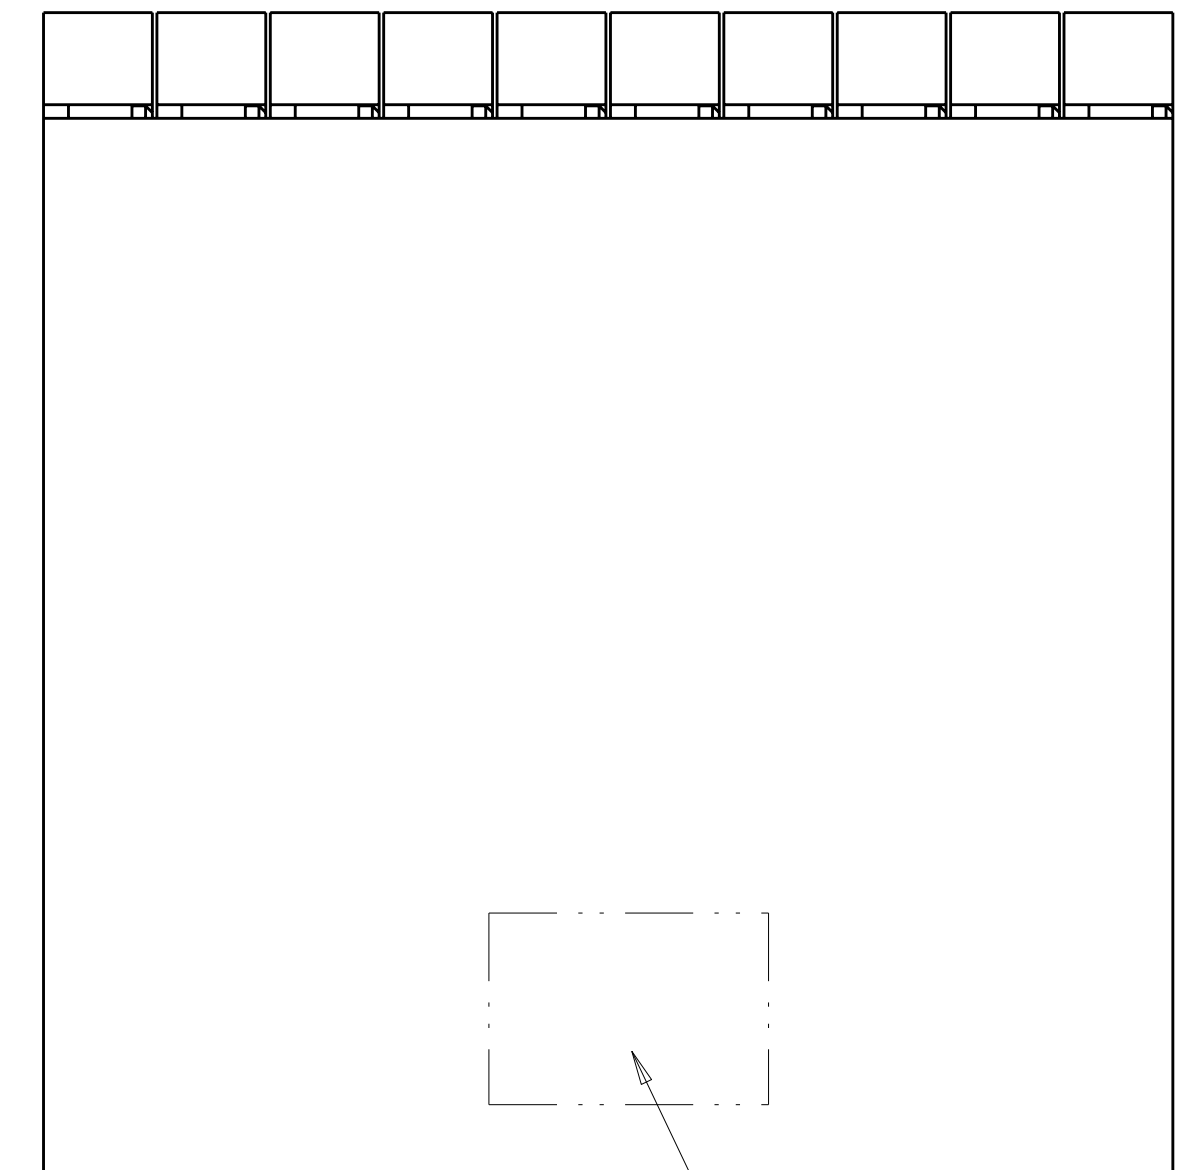

RECOMMENDED PC BOARD LAYOUT
 COMPONENT SIDE SHOWN
 SCALE 4:1

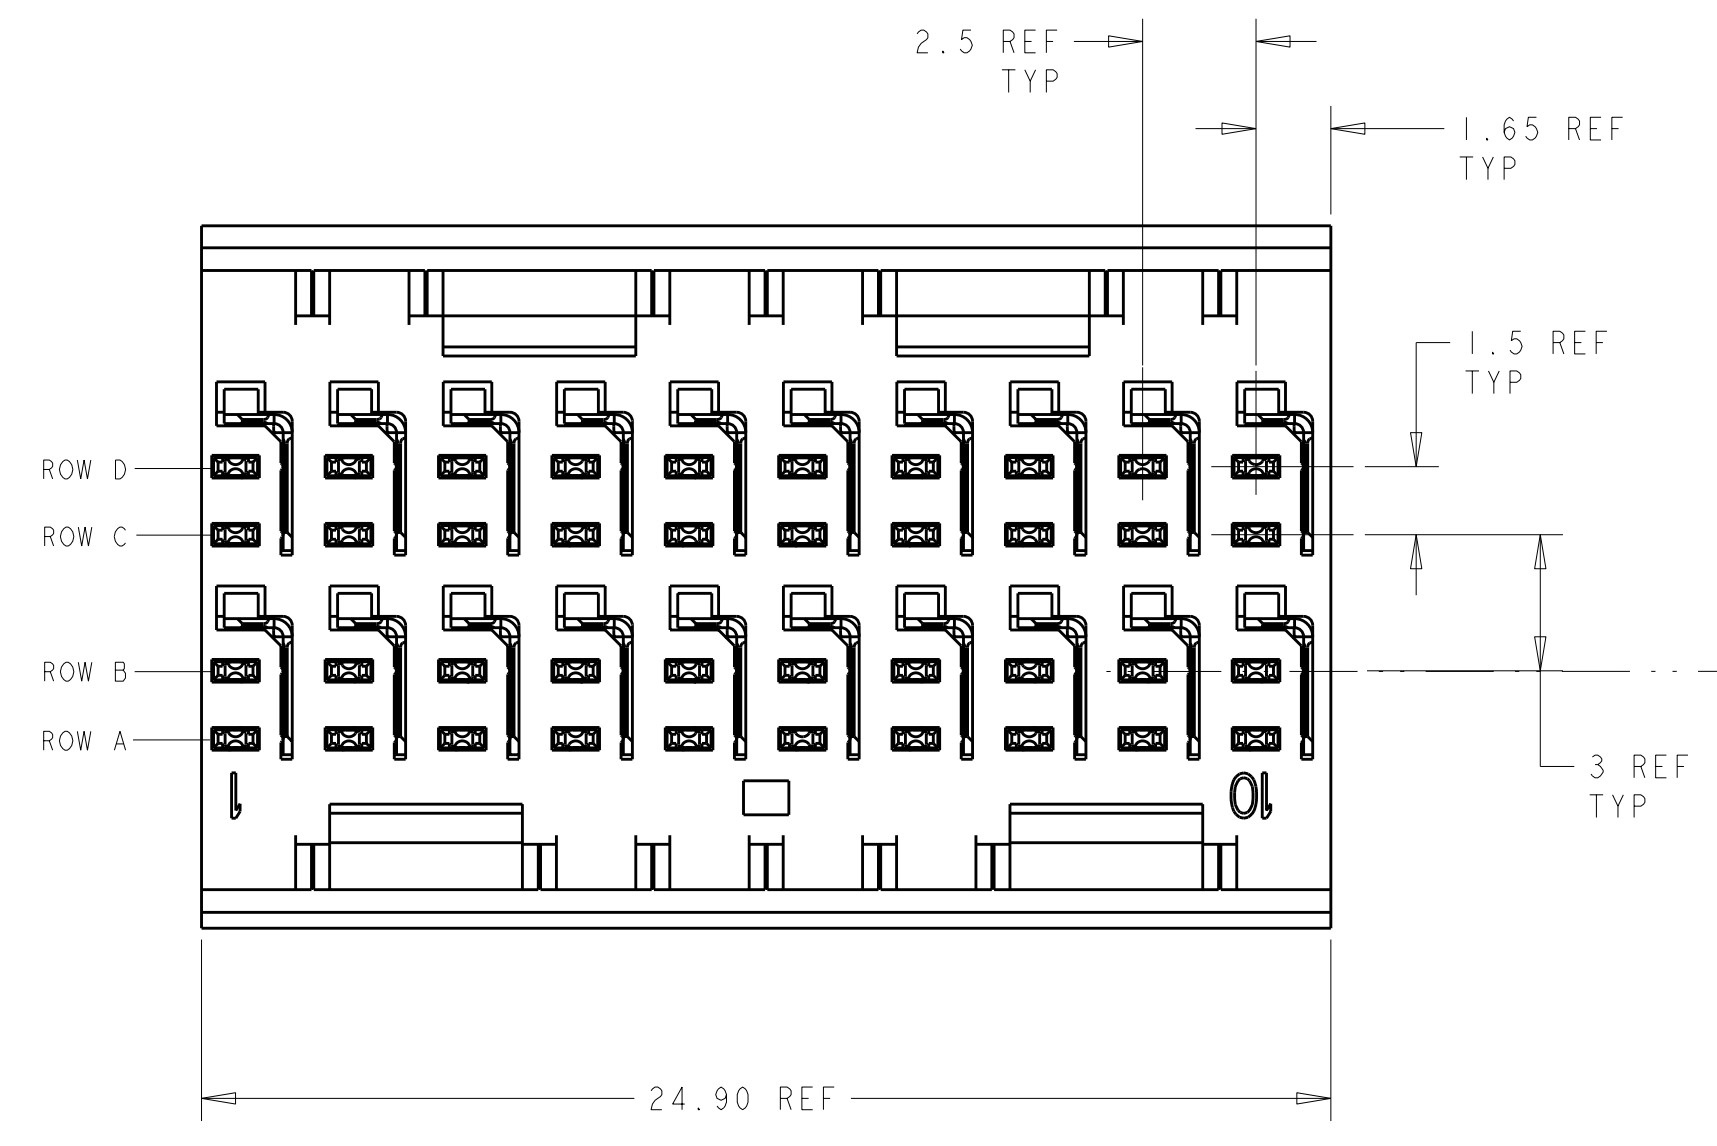

TOP SURFACE OF
 DAUGHTER CARD

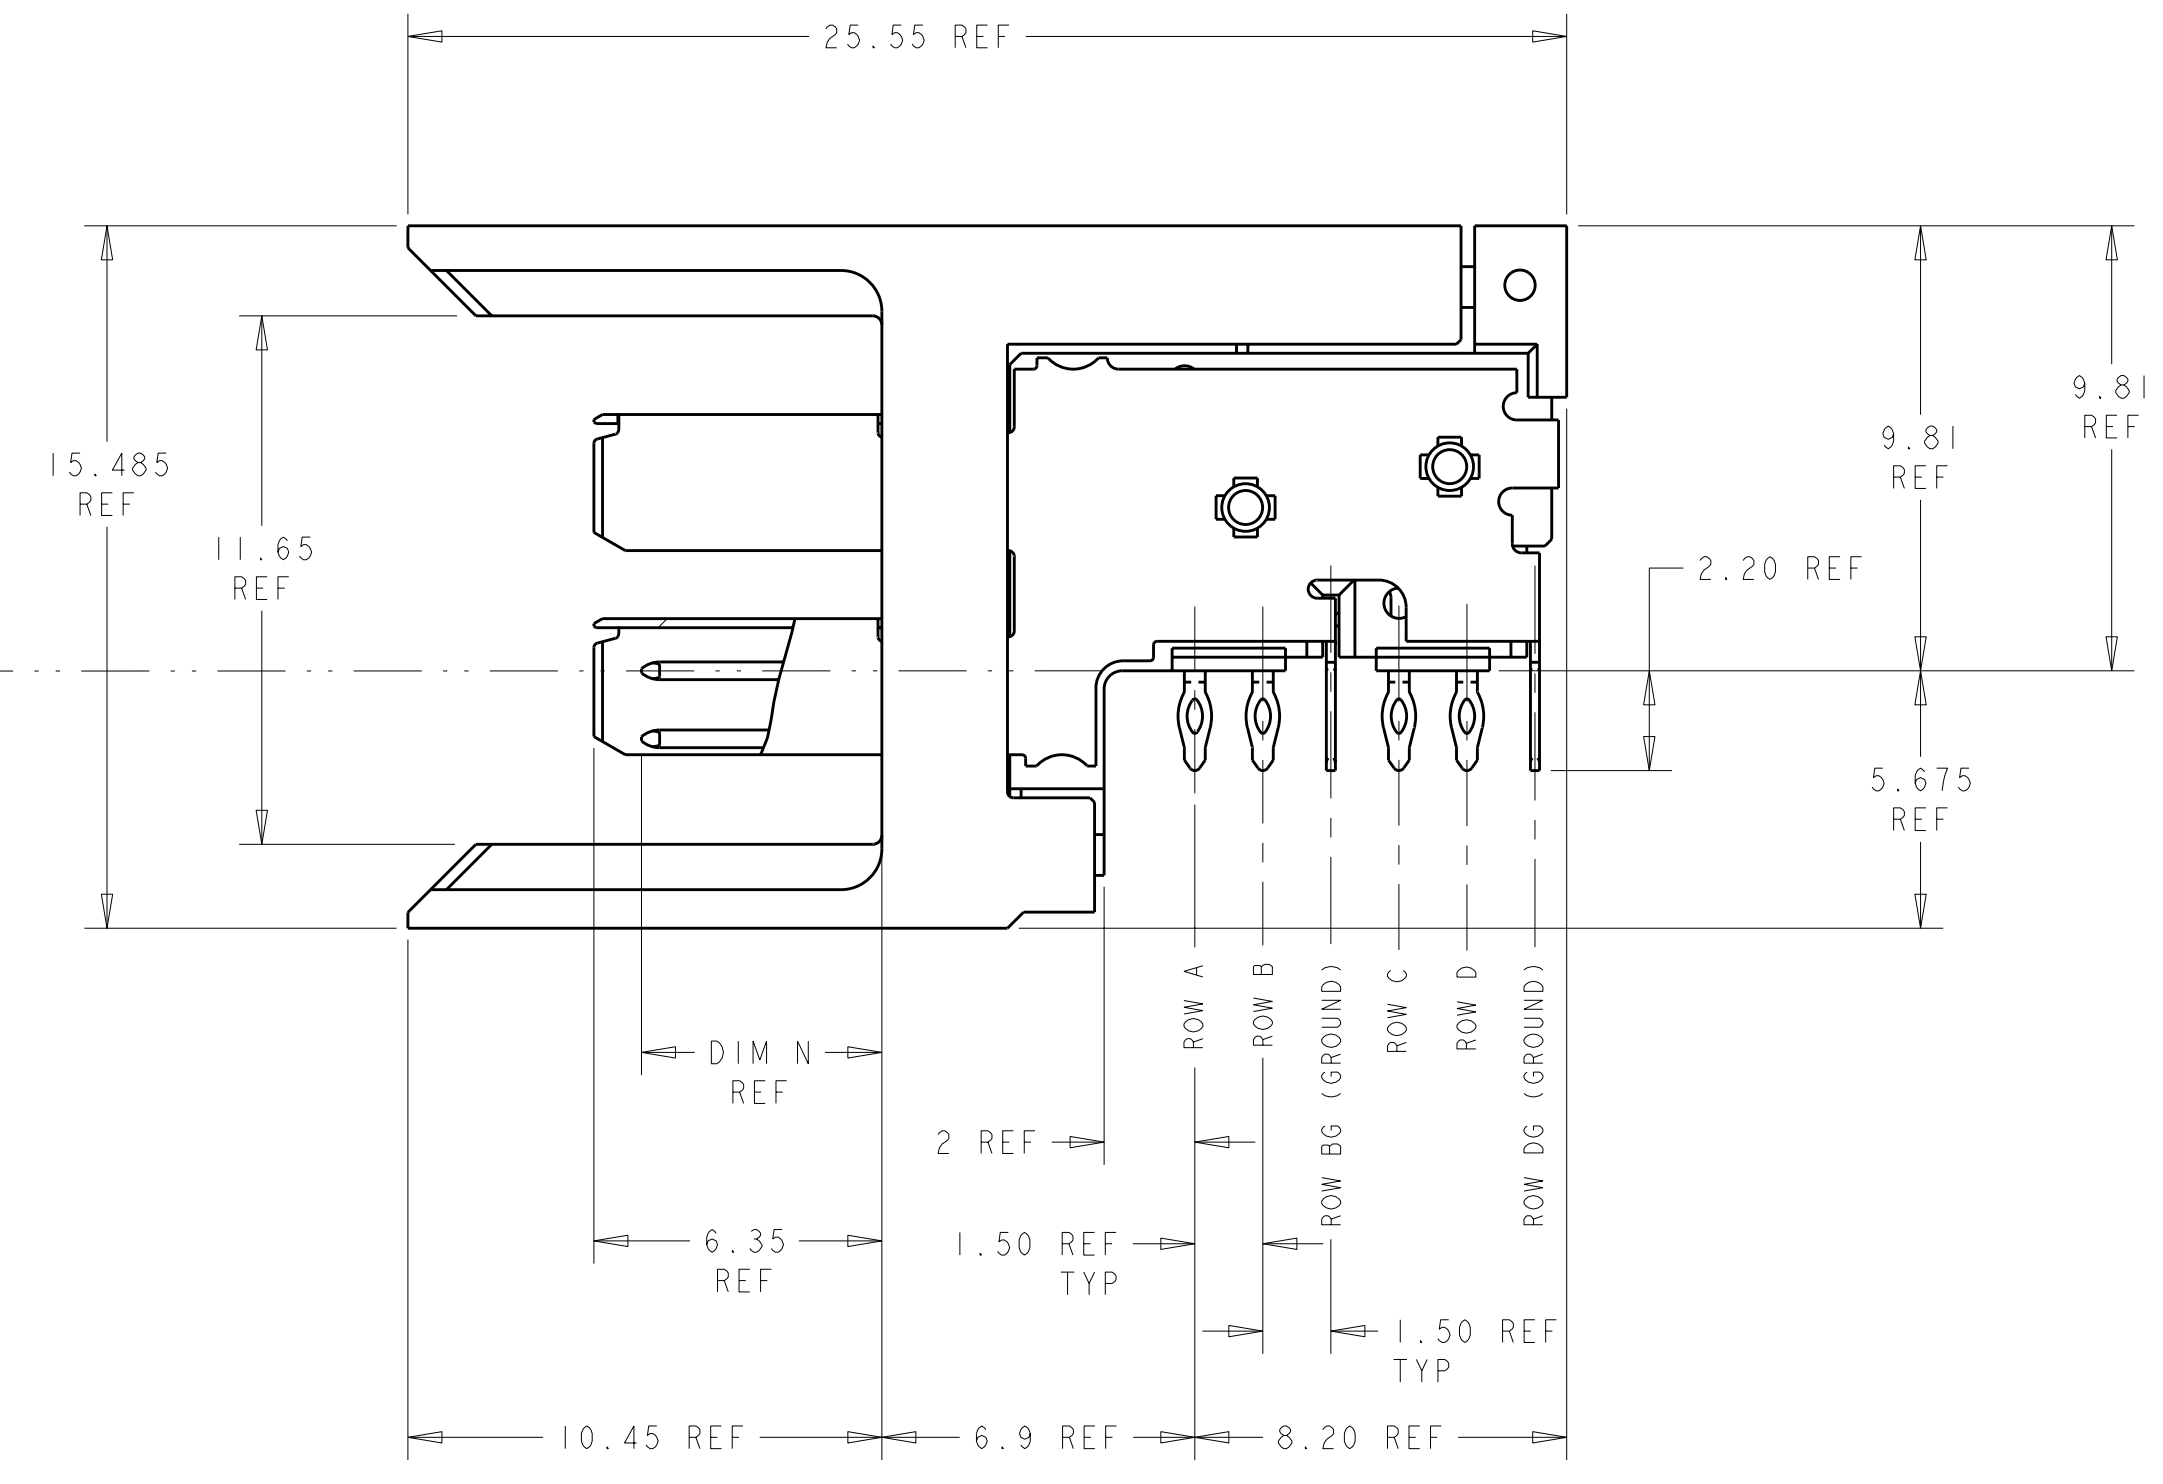

1469169-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG: S. J. MAGARO 02DEC2003		CHK: D. S. SZCZESNY 02DEC2003		APVD: R. PATTERSON 31MAR2006		NAME: HEADER ASSEMBLY, RIGHT ANGLE, 2 PAIR, COPLANAR, HMZd	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC: -		APPLICATION SPEC: -		SIZE: A100779	
MATERIAL: 2		FINISH: 3		WEIGHT: -		CUSTOMER DRAWING		SCALE: 6:1 SHEET 1 OF 1 REV C	