


CONFIDENTIAL & PROPRIETARY

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO LAIRD TECHNOLOGIES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN LAIRD TECHNOLOGIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM LAIRD TECHNOLOGIES.

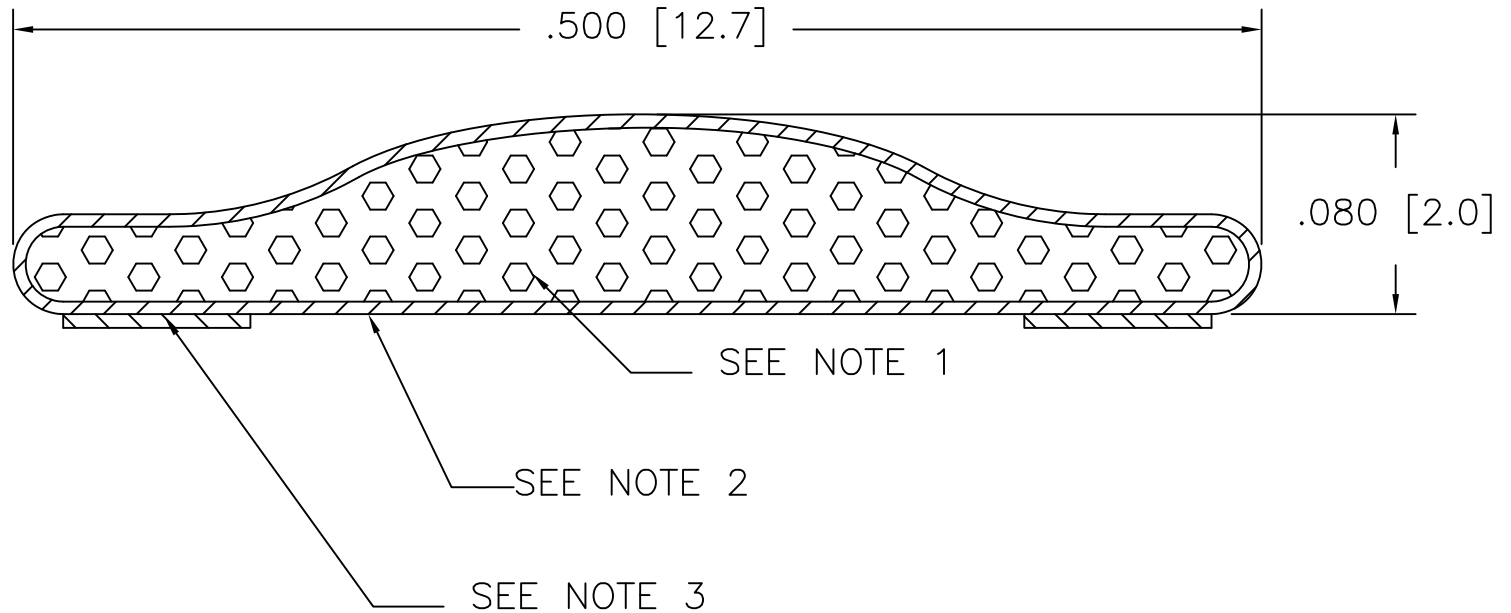

NOTES:

1. FOAM: POLYURETHANE
2. FABRIC: NICKEL PET-TAF FR Ecogreen
3. TAPE: .075" TAPE HI-TEMP x 2
4. LINER: NO EXTENDED RELEASE LINER
5. FABRIC SEAM LOCATION MAY VARY.
6. CARRIER: NO CARRIER
7. THIS PART IS ROHS COMPLIANT AND MEETS THE REQUIREMENTS OF LT-GES-001

| REVISIONS: |
|------------|
| |
| |
| |
| |
| |

| | |
|--|------------------|
| TITLE: SHIELDING GASKET | |
| Dwg. or Part No. 4A66-PA-51H | REV. 0 |

| | | |
|---------------------|-----------------|-----------------|
| DRAWN GIBILTERRA | DATE 3/18/08 | SCALE: 1/1 |
| CHECKED BY: FJG | | DATE 3/31/08 |
| RELEASED BY: FJG | | DATE 3/31/08 |

| | | |
|--|-----------|--------------------|
| DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE AS FOLLOWS: | | |
| DECIMALS | LENGTH | |
| .XX ± .03 | 0" - 6" | ± .030" |
| .XXX ± .020 | 6" - 11" | ± .050" |
| | 11" - 48" | ± .100" |
| ANGLES | 48° - 70° | ± .187° |
| | ± 1/2° | 70° - 144° ± .250° |

