


NOTES 1: If there are pattern and a bia hole on part, there is a possibility that it will make contact with the leads.
 2: Lead co-planality include reinforced metal fittings shall be 0.1mm MAX.

Part No.	Number of contacts	Code No.	A	B	C
DF 13EA-10DP-1.25V(55)	10	CL536-0570-0-55	12.1	5.0	8.7
DF 13EA-20DP-1.25V(55)	20	CL536-0571-0-55	18.35	11.25	14.95
DF 13EA-30DP-1.25V(55)	30	CL536-0572-0-55	24.60	17.50	21.20
DF 13EA-40DP-1.25V(55)	40	CL536-0573-0-55	30.85	23.75	27.45

2	Brass	Contact area:Gold plated 0.2µm MIN	5	S. PVC	Gray
		Lead area:Tin-copper plated 1µm MIN		4	R. PVC
1	Polyamide	Under plating:Nickel 1µm MIN	3	Phosphor bronze	Tin plated 1µm MIN
		Beige,UL94V-0			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-H-00002149	
APPROVED :KI. AKIYAMA 16.03.31			DESIGNED MI. SAKIMURA		
CHECKED :TS. FUKUSHIMA 16.03.29			CHECKED TS. FUKUSHIMA		
DESIGNED :MI. SAKIMURA 16.03.29			DATE 16.09.26		
DRAWN :MI. SAKIMURA 16.03.29			DRAWING NO. EDC-367982-55-00		
HRS HIROSE ELECTRIC CO., LTD.			PART NO. DF13EA-*DP-1.25V(55)		
			CODE NO. CL536-		

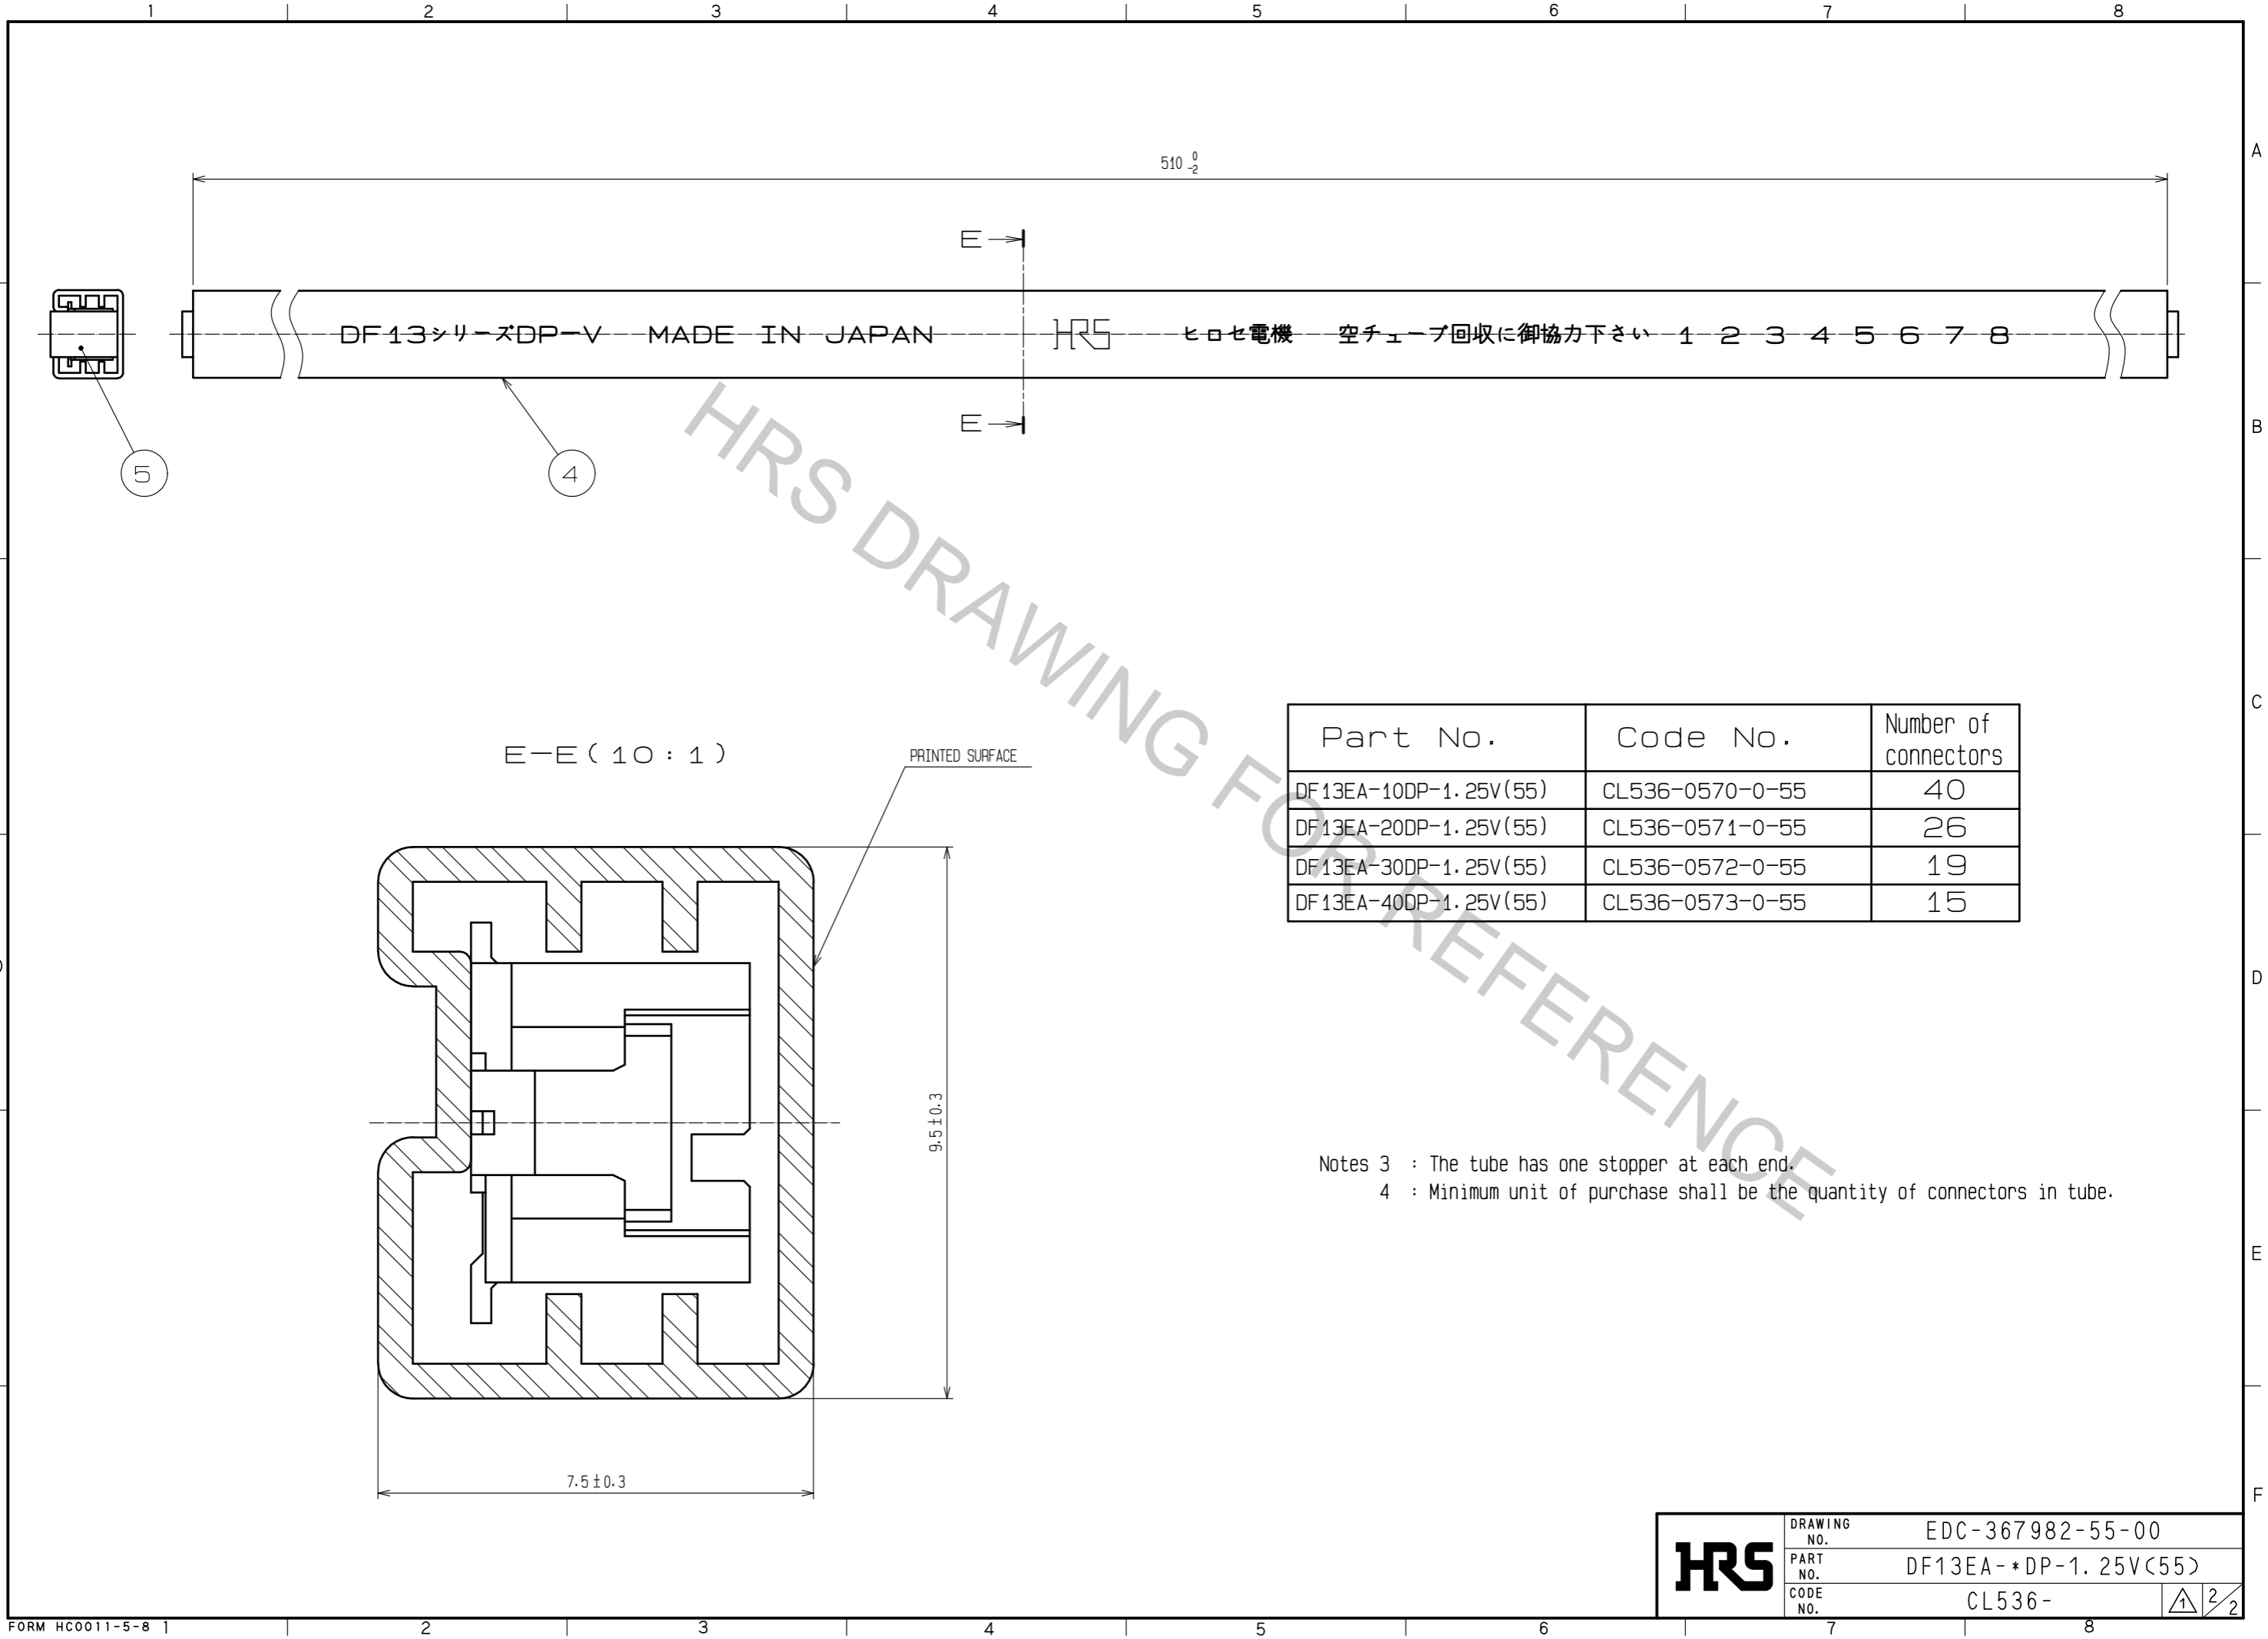

Part No.	Code No.	Number of connectors
DF13EA-10DP-1.25V(55)	CL536-0570-0-55	40
DF13EA-20DP-1.25V(55)	CL536-0571-0-55	26
DF13EA-30DP-1.25V(55)	CL536-0572-0-55	19
DF13EA-40DP-1.25V(55)	CL536-0573-0-55	15

Notes 3 : The tube has one stopper at each end.
 4 : Minimum unit of purchase shall be the quantity of connectors in tube.

HRS	DRAWING NO.	EDC-367982-55-00	
	PART NO.	DF13EA-*DP-1.25V(55)	
	CODE NO.	CL536-	2/2