
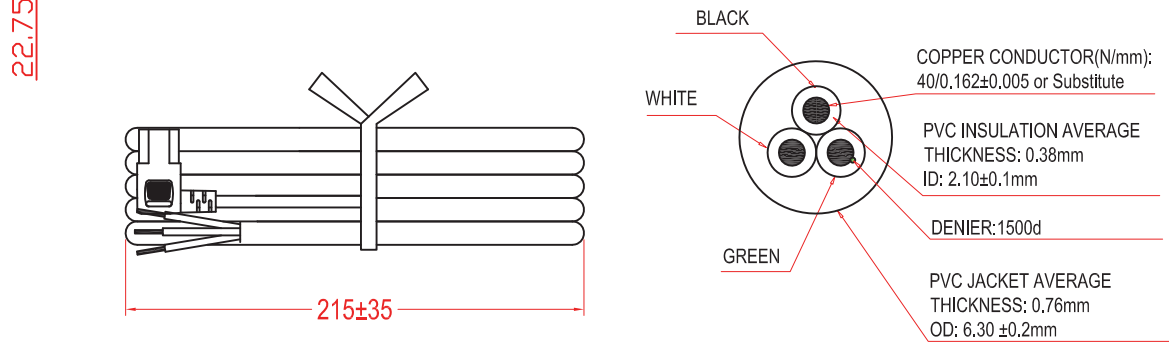


PLUG COMPONENT			PLUG STRIP DIMENSION			Wire Spec.	END STRIP DIMENSION			TERMINAL COMPONENT		
COLOR	DESCRIPTION	Q'ty	R.I.J	R.O.J	COLOR	SVT 18AWGx3C	R.O.J	R.I.J	COLOR	COLOR	DESCRIPTION	TYPE
40P BLACK	PVC Compound	1	6 ⁺¹ ₋₀	15 ± 1	BLACK(L)	60°C Unshielded Black Length 1500±50	50.8±5.0	15.9±3.0	BLACK(L)	BLACK(L)	FULL TINNED	
True color	Assembly Body 111-001-005	1	6 ⁺¹ ₋₀	15 ± 1	WHITE(N)		50.8±5.0	15.9±3.0	WHITE(N)	WHITE(N)	FULL TINNED	
			6 ⁺¹ ₋₀	15 ± 1	GREEN(E)		50.8±5.0	15.9±3.0	GREEN(E)	GREEN(E)	FULL TINNED	

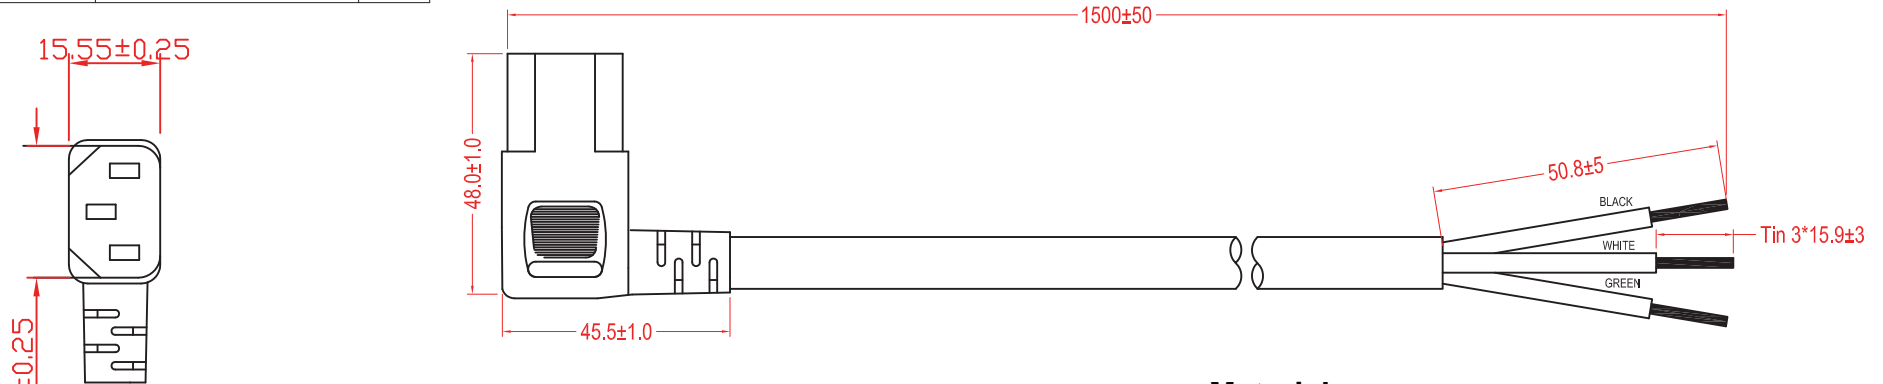

- Material:**
- SVT 3x18AWG(0.824mm²) VW-1, 60°C 300V
 - Jacket color: Black
 - E- Green; L- Black; N- White
 - All material must be RoHS compliant
- Electrical:**
- 100% open & short testing
 - Insulation resistance: 100MΩ (min.)
 - Voltage: 500V DC / 1 minute

Hank dimension

Wire cross section

Unit: mm



Scale	Free					Date	Name	Title Power cord - SVT 60°C 18AWG Right Angle/Open End, Unshielded 1.5 Meters	
TOLERANCE						Drawn	Wilson		
X.	±0.3					Approved	Groll	ASSMANN WSW-No.	
X.X	±X							AK500-RA-6-1.5	
X.XX	±X							Drawing-No.	
DIM	TOL					 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us		rev00	
X.°	±X°							Replace	Sheet
X.X°	±X°								1/1
Angle	TOL	Id.	Modification	Date	Name				