


Number of contacts

20

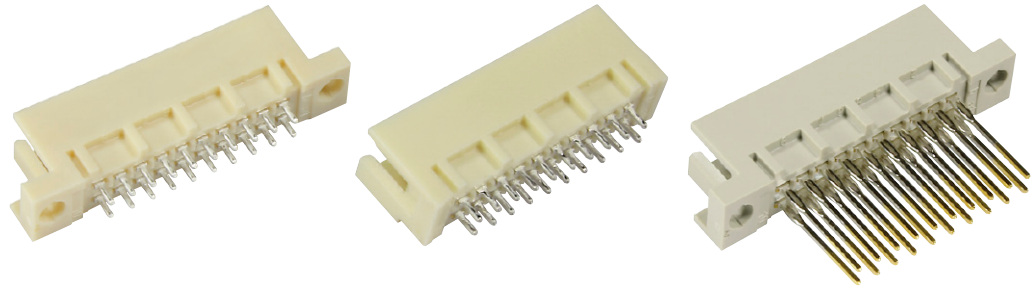

Male connectors

Identification	No. of contacts	Contact arrangement	Part number	Performance levels according to IEC 60603-2. Explanation chapter 00							
				3	2	1					
Male connector with solder pins 2.5 mm with fixing flange with fixing flange, THR with fixing flange, THR, 240 pieces on a reel without fixing flange without fixing flange, THR without fixing flange, THR, 240 pieces on a reel	20		Performance level 3 on request	09 75 120 6902	Performance level 1 on request						
	20			09 75 120 6519 ^{d)} 09 75 120 6519 792 ^{d)}							
	20			09 75 120 6592							
	20			09 75 120 6569 ^{d)} 09 75 120 6569 792 ^{d)}							
Male connector with solder pins 4.0 mm with fixing flange with fixing flange, THR without fixing flange without fixing flange, THR	20			Performance level 3 on request		09 75 120 6903	Performance level 1 on request				
	20					09 75 120 6520 ^{d)}					
	20					09 75 120 6593					
	20					09 75 120 6570 ^{d)}					
Male connector with solder pins 13 mm with fixing flange with fixing flange, THR	20					Performance level 3 on request		09 75 120 6577	Performance level 1 on request		
	20							09 75 120 6521 ^{d)}			
Male connector with wrap posts¹⁾ 13 mm with fixing flange	20							Performance level 3 on request		09 75 120 6907	Performance level 1 on request
Male connector with press-in pins 5.0 mm with fixing flange without fixing flange	20									09 75 120 6904	
	20		09 75 120 6504								

¹⁾ To be used only for wire wrap termination

^{d)} CTI > 400