

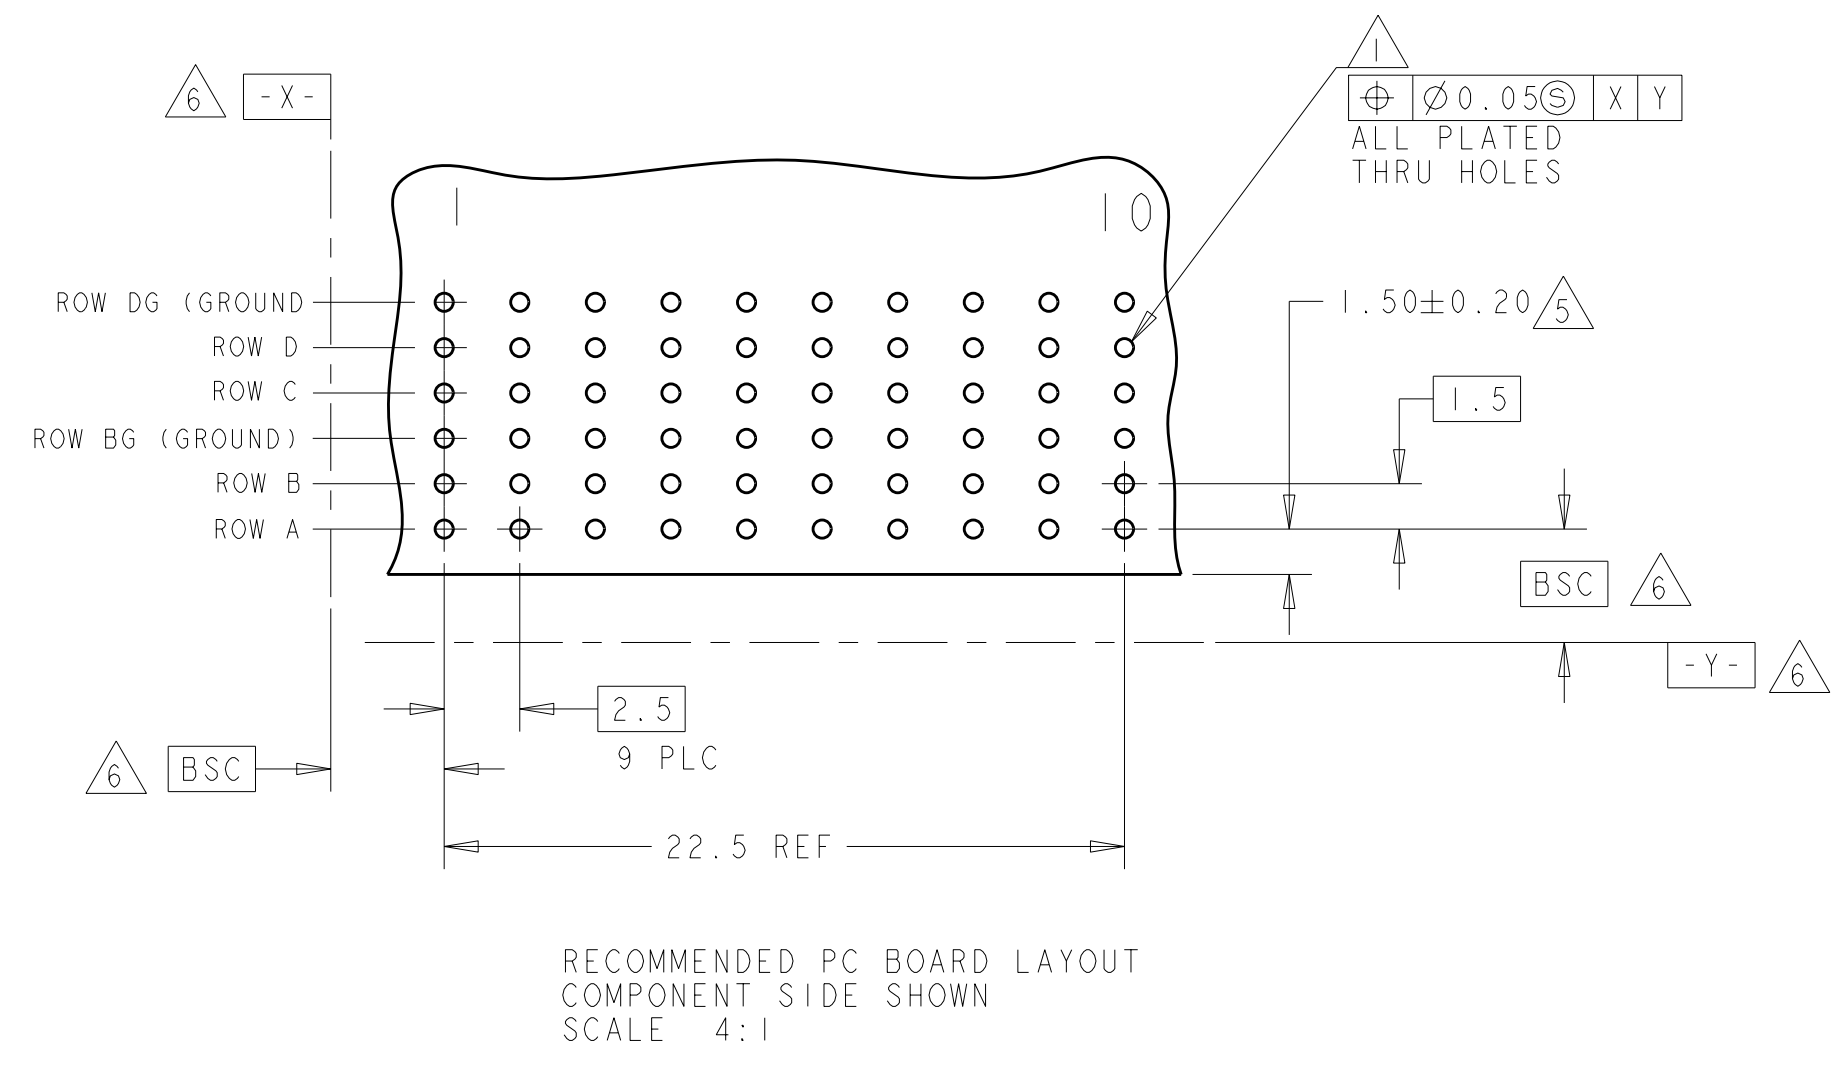



LOC		DIST		REVISIONS			
AD	00	REV	DATE	BY	CHK	APPV	
A		REV PER ECO-11-007577	13APR2011	RKC	JE		

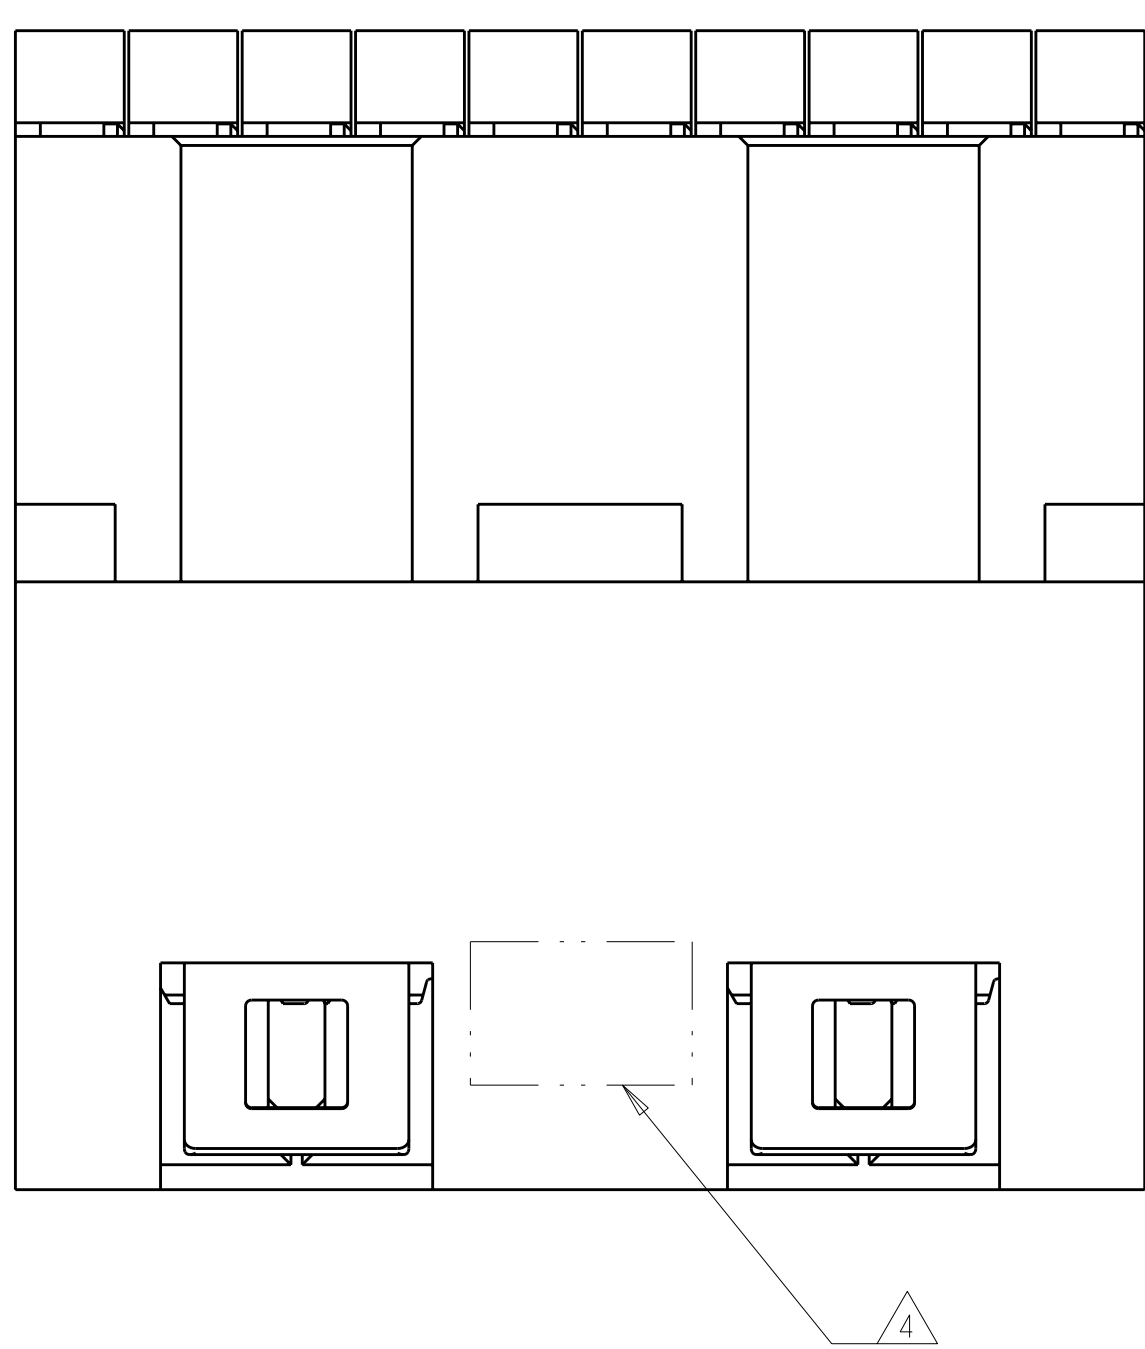

- 1 REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- 2 MATERIAL:  
CONTACT & SHIELD - PHOSPHOR BRONZE  
HOUSING & CHICKLET - GRAY GLASS FILLED POLYESTER
- 3 FINISH: SIGNAL AND GROUND CONTACTS:  
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS  
COMPLIANT PIN AREA: 0.5 μm MIN MATTE TIN OVER BASE PLATING
- 4 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE IN APPROXIMATE AREA SHOWN
- 5 DIMENSION APPLIES TO CENTERLINE OF THRU HOLE
- 6 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

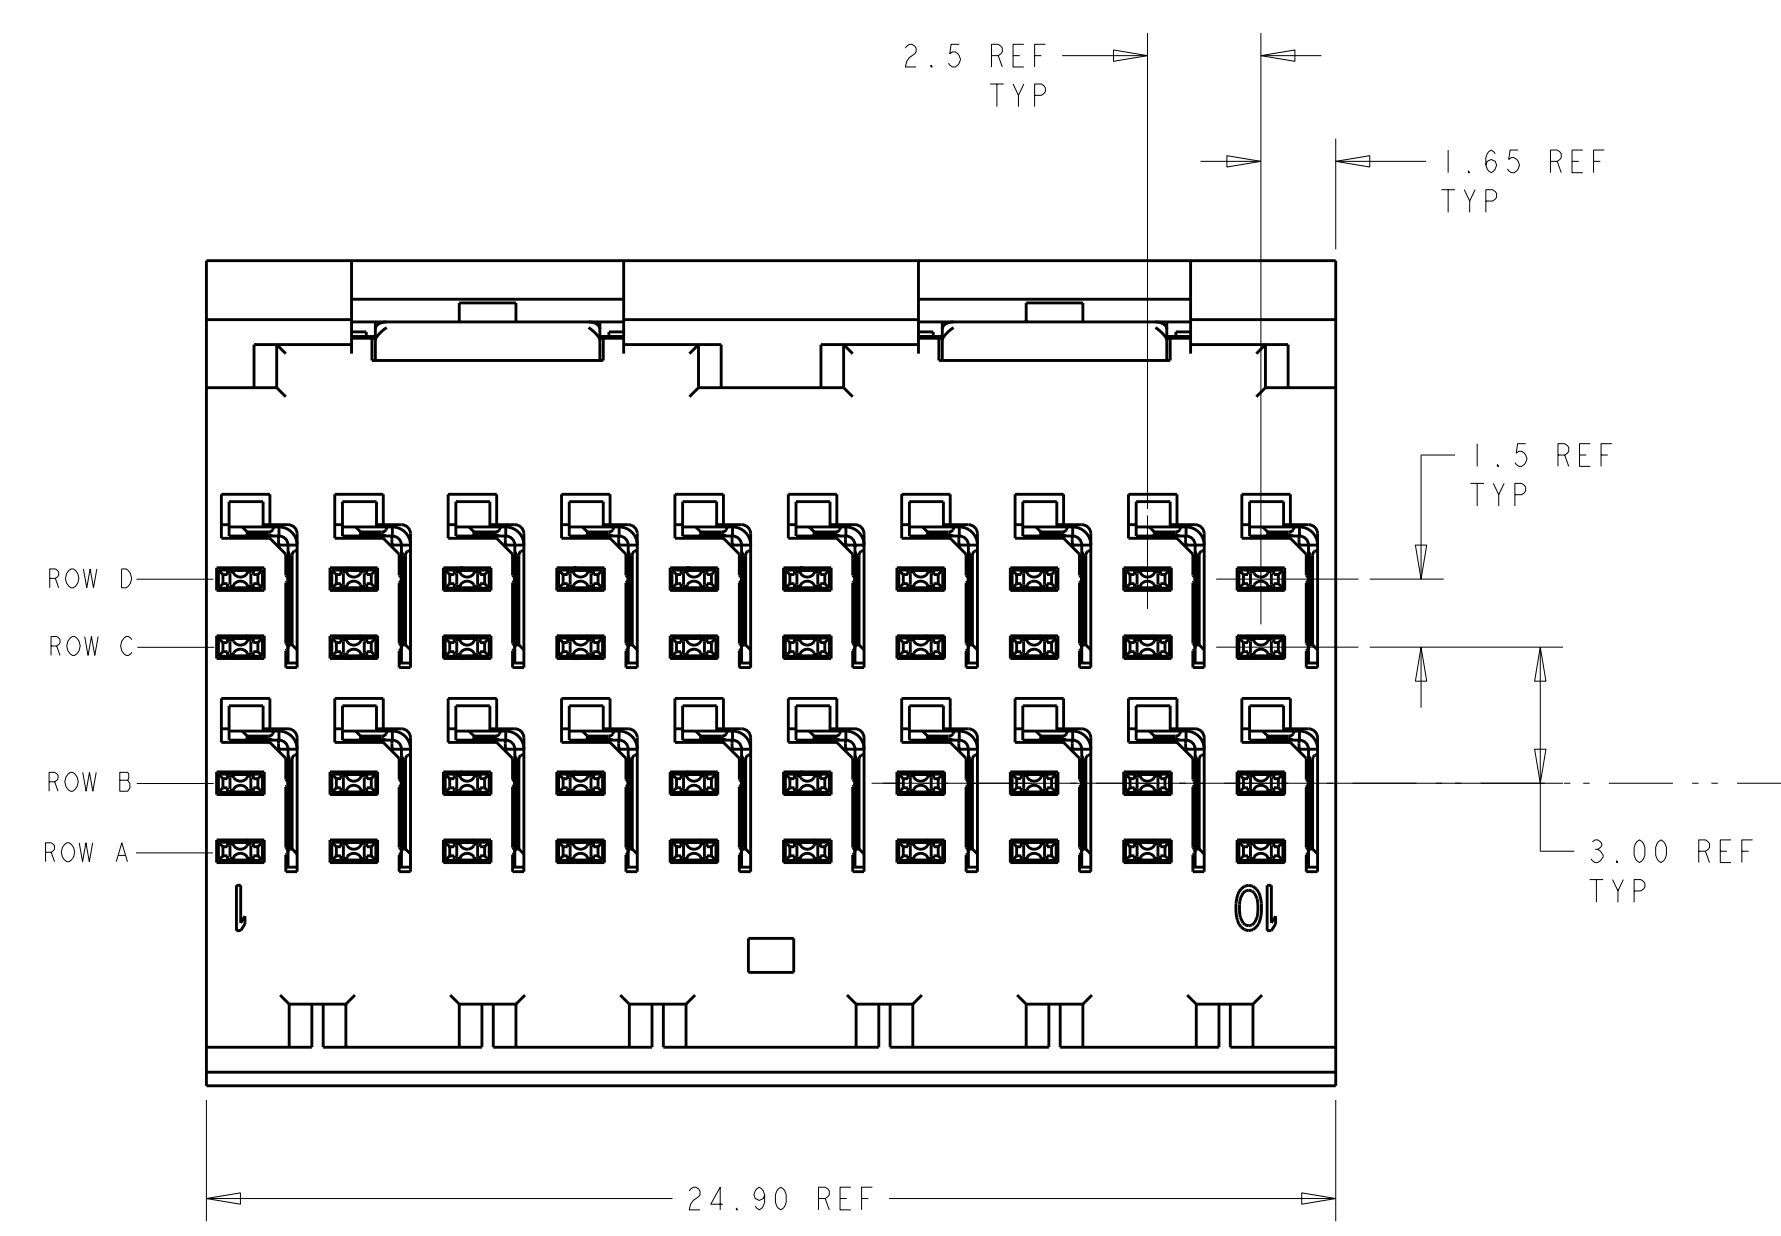

TOP SURFACE OF DAUGHTER CARD

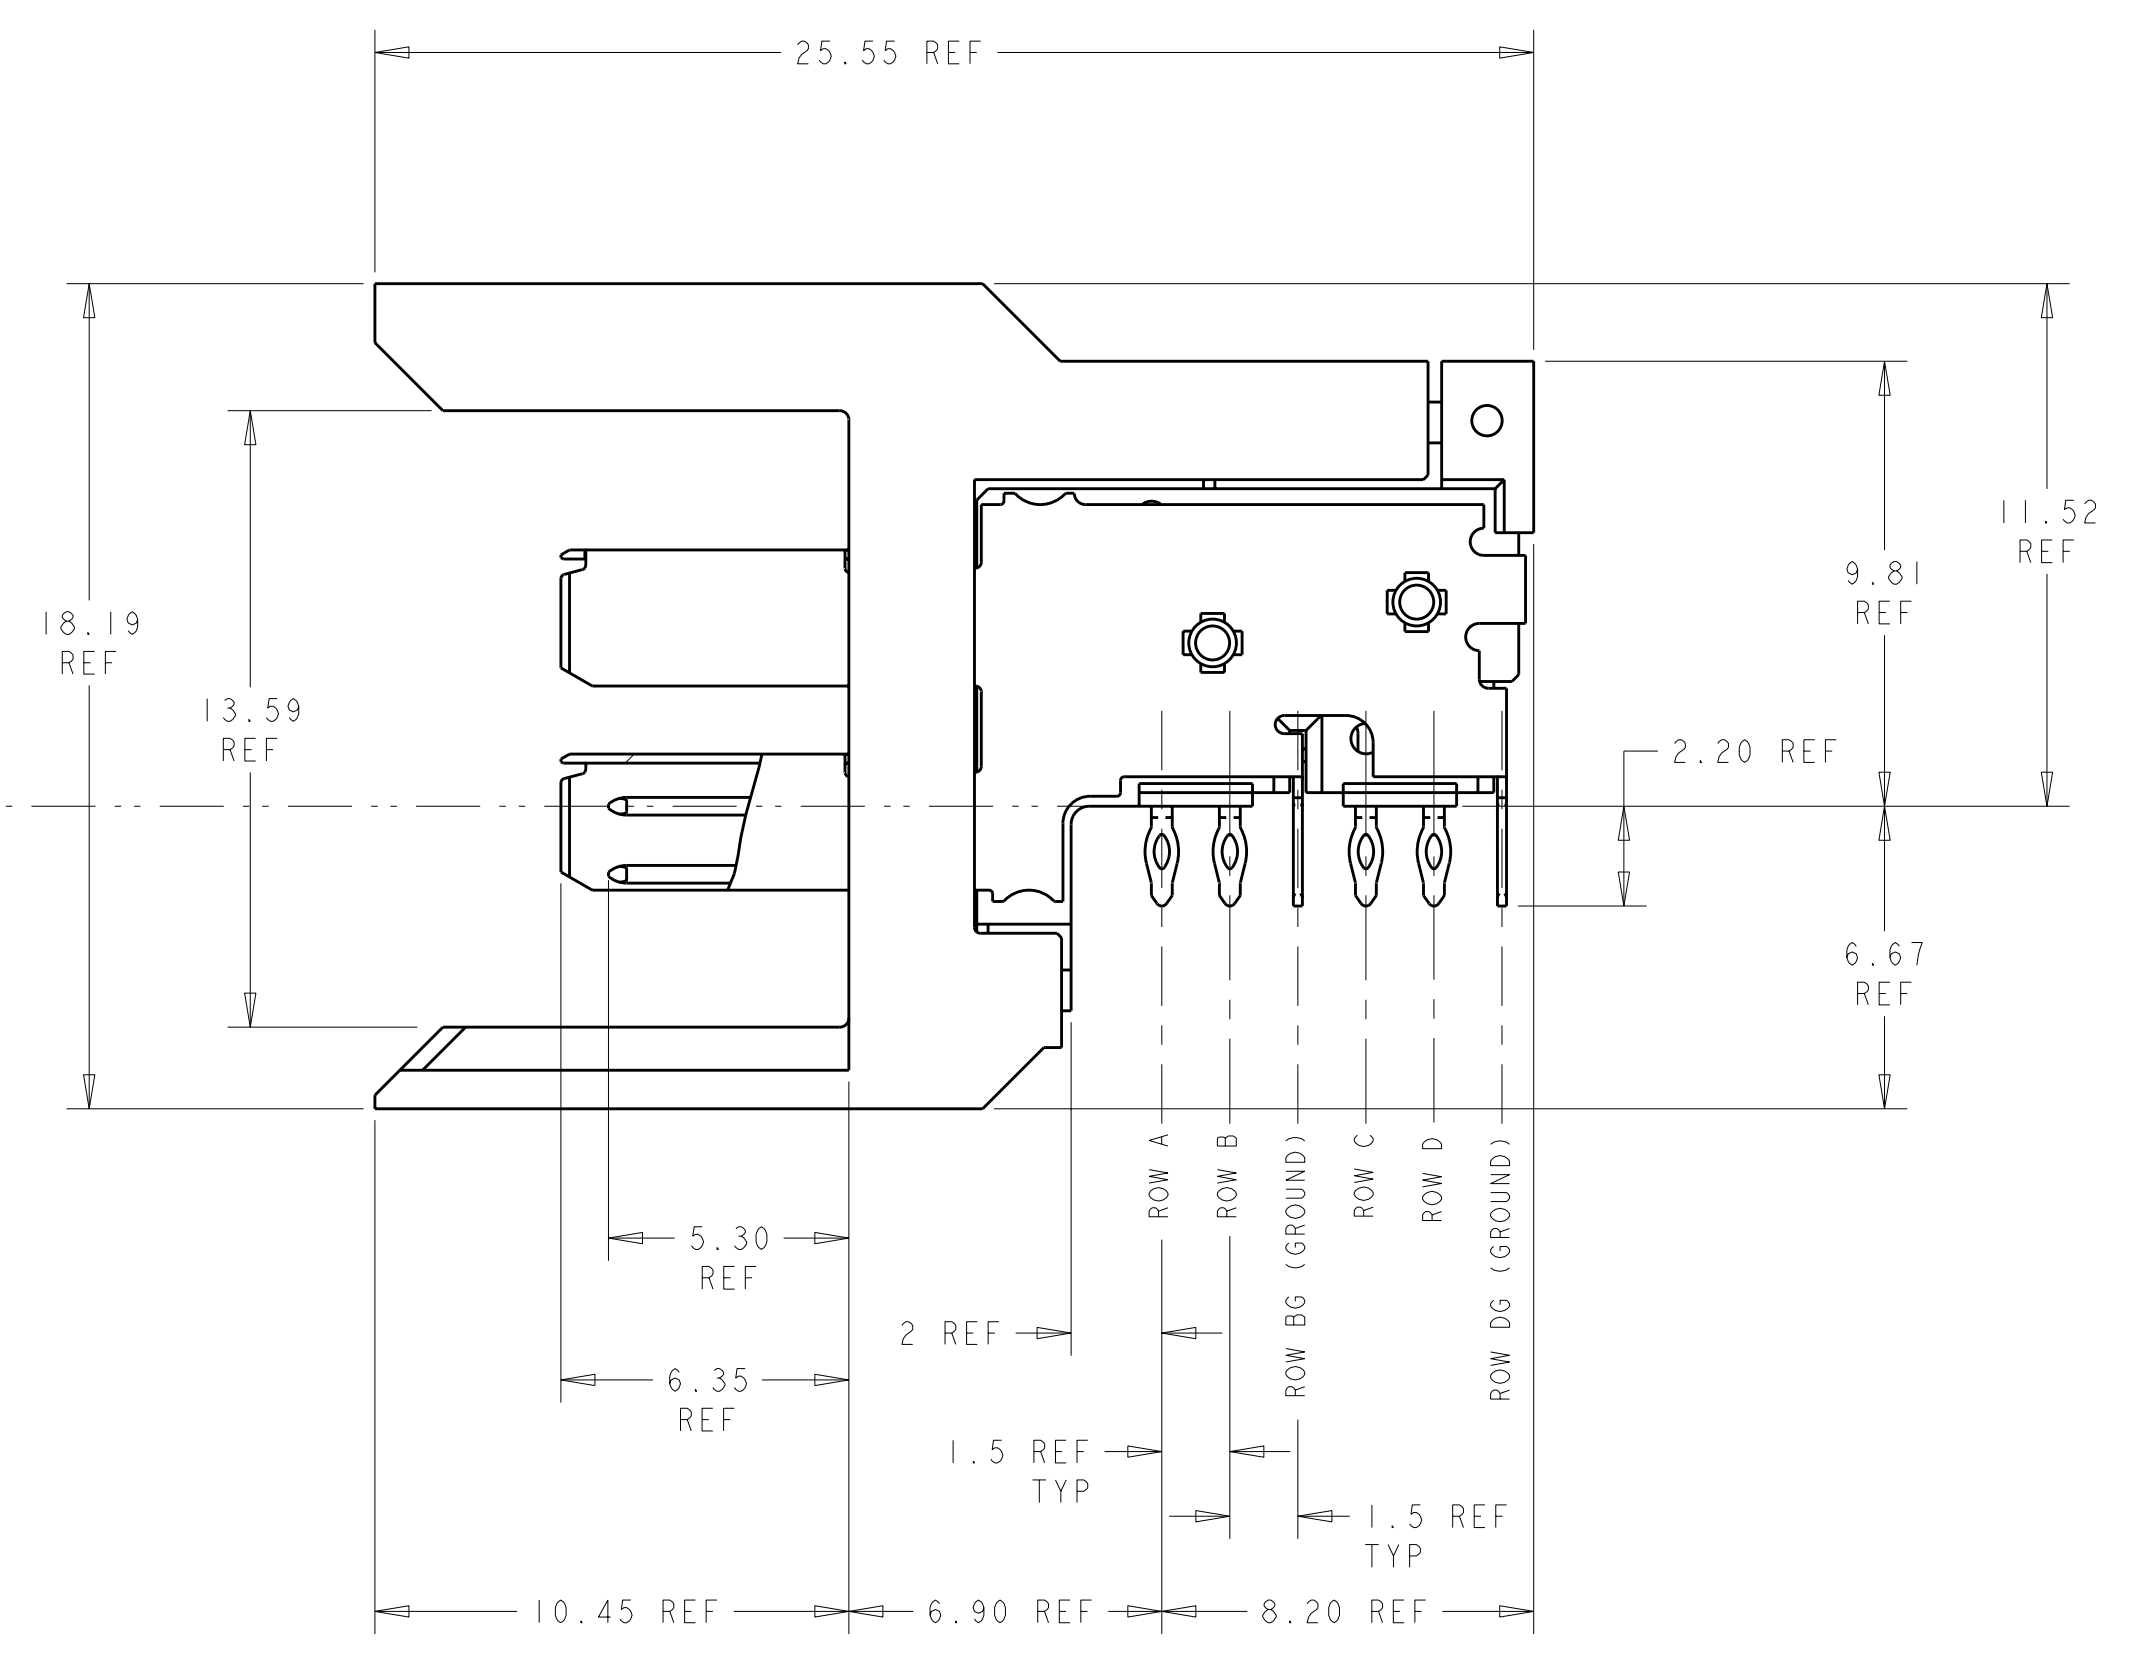

6469354-1  
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. J. MAGARO 31 JUL 2004		TE Connectivity NAME: HEADER ASSEMBLY, RIGHT ANGLE, 2 PAIR, LATCHING, HMZd	
DIMENSIONS: mm		CHK R. A. PATTERSON 31 JUL 2004			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		PRODUCT SPEC	
9 PLC ±		-		APPLICATION SPEC	
1 PLC ±		-		SIZE CAGE CODE DRAWING NO	
2 PLC ±		-		A100779C-6469354	
3 PLC ±		-		RESTRICTED TO	
4 PLC ±		-		-	
ANGLES ±		-		WEIGHT	
FINISH		-		CUSTOMER DRAWING	
MATERIAL		-		SCALE 6:1 SHEET 1 OF 1 REV A	