



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



A1C25-A  
ACTUAL SIZE

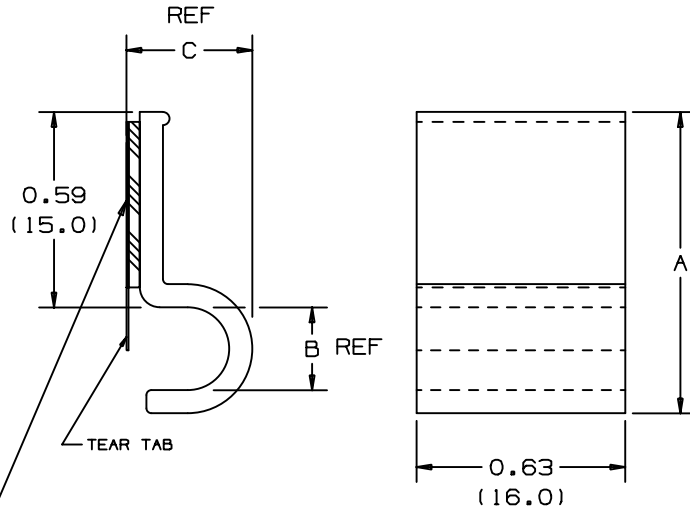

ADHESIVE TAPE--PRESSURE SENSITIVE FOAM .040 (1.02) THICK WITH RUBBER ADHESIVE AND PROTECTIVE LINER.  
\*\*MOUNT IS DESIGNED TO SUPPORT LISTED MAXIMUM STATIC LOAD ON A CLEAN, DRY, SMOOTH, GREASE-FREE SURFACE.

PANDUIT PART NUMBER*	NOMINAL CABLE O.D. in./ (mm)	A in. (mm)	B in. (mm)	C in. (mm)	STATIC LOAD** lbs./ (g)	WEIGHT lbs./ (g) 100 pcs.
A1C12-A	0.120 (3.0)	0.77 (19.6)	0.12 (3.0)	0.23 (5.8)	0.14 (64)	0.21 (95)
A1C25-A	0.250 (6.4)	0.91 (23.1)	0.25 (6.4)	0.38 (9.7)	0.14 (64)	0.32 (145)
A1C38-A	0.375 (9.5)	1.04 (26.4)	0.38 (9.7)	0.51 (13.0)	0.14 (64)	0.42 (190)
A1C50-A	0.500 (12.7)	1.17 (29.7)	.50 (12.7)	0.64 (16.3)	0.14 (64)	0.50 (227)

NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE BY PANDUIT WITH RESPECT TO ADHESIVE BOND PERFORMANCE. AMONG OTHER THINGS, THE CONDITIONS UNDER WHICH THESE MOUNTS MAY BE APPLIED AND/OR THE SURFACE TO WHICH THEY MAY BE APPLIED ARE BEYOND PANDUIT'S CONTROL.

TO APPLY MOUNT

- 1) REMOVE PROTECTIVE LINER.
- 2) PLACE IN DESIRED LOCATION.
- 3) APPLY PRESSURE TO MOUNT.

NOTES:

- \*1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.

(DIMENSIONS IN PARENTHESES ARE IN METRIC.)

CAD FILENAME/LAYERS GB0431BA\_PB\_A1CCLIPS\_02



CORP. TINLEY PARK, ILLINOIS

A1C-A  
ADHESIVE CLIP

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:  
(.X) ±0.1(2.5) (.XXX) ±0.020(1.5)  
(.XX) ±0.05(1.3) ANGLES ± 5°

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
2	6/15/01	LGG		ADDED REF TO DIM	GB0431BA	2		
1	2-16-94	SJSU		REVERSE TEAR TAB	GB0431BA	1		
R	11-5-93	SJSU		INITIAL RELEASE	GB0431BA	R		

DRAWN BY SJSU  
DATE 11-5-93  
CHK'D

MAT'L:

GRAY  
PVC

SCALE NONE

DRAWING NO. GB0431BA

DWG SIZE A