


C1

C2

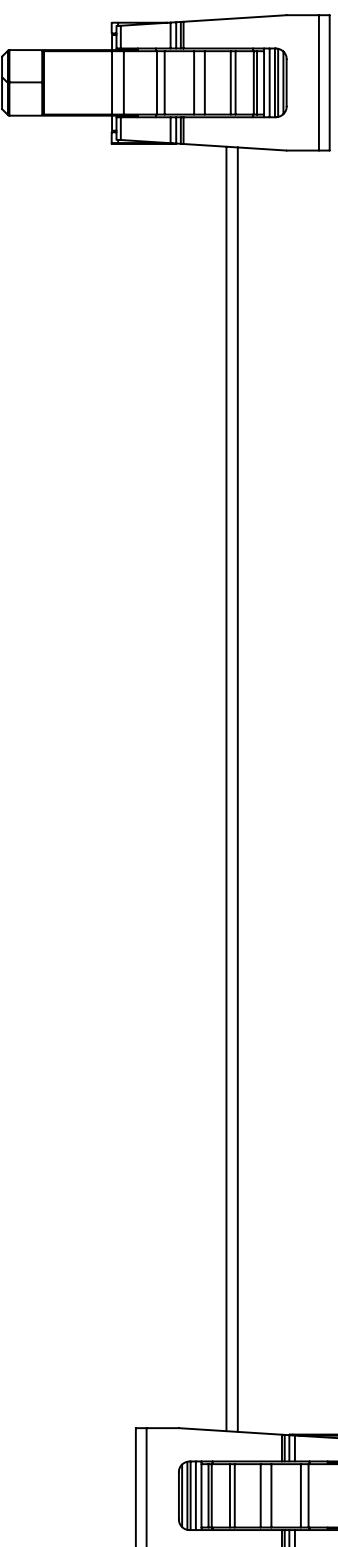

Part-No. / 产品号码	Length/长度
33 15 243 050 0003 .00	500±5
33 15 243 020 0002 .00	200±3
33 15 243 010 0001 .00	100±3

NOTES/要求:

- 1.) CABLE MUST BE PERFORMED 100% CONTINUITY TEST AND HI-POT (300VDC) TEST.
- 2.) CABLE OPERATION TEMPERATURE= -30° C TO +105° C .
- 3.) WHITE LABEL CONTENT:

DATE CODE & LOT INFORMATION  
HARTING P/N & REVISION

Rev.	Description	Appr.	Date
01	Add side view.	Lucy.Z	15/04/13
00	Prototype	Andrew.H	24/05/11

<p>All Dimensions in mm Original Size DIN A4</p>		Ref. MB												
Free size tol.	V= cm <sup>3</sup> A= cm <sup>2</sup>	Mat.												
<table border="1"> <thead> <tr> <th>Name</th> <th>Date</th> <th>Scale</th> </tr> </thead> <tbody> <tr> <td>Detail</td> <td></td> <td>✓</td> </tr> <tr> <td>Insp.</td> <td></td> <td></td> </tr> <tr> <td>Approved</td> <td></td> <td>Sheet 1 of 1</td> </tr> </tbody> </table>		Name	Date	Scale	Detail		✓	Insp.			Approved		Sheet 1 of 1	Title
Name	Date	Scale												
Detail		✓												
Insp.														
Approved		Sheet 1 of 1												
<p>HARTING (Zhuhai) Manufacturing Co., Ltd.</p>		SEE BILL OF MATERIAL												
<p>DWG. No. TB_33 15 0001 .01</p>		Har-Flex female 6pole, double ended Flat cable assembly, L=xMM												

4

3

2

1