


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XMCOLOR  
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.  
AVAILABLE IN TEN COLORS.  
CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533.  
GOLD PLATED PER MIL-G-45204 B TYPE 1 0.0001 [0.00254] THICK MINIMUM.  
SPRING: STAINLESS STEEL TYPE 302.

2. P/N W-701/COLOR  
28AWG 19X40 TINNED COPPER  
0.047 [1.19] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.

3. PERFORMANCE  
MAXIMUM CURRENT: 1.0 AMPS  
MAXIMUM VOLTAGE: 600 W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

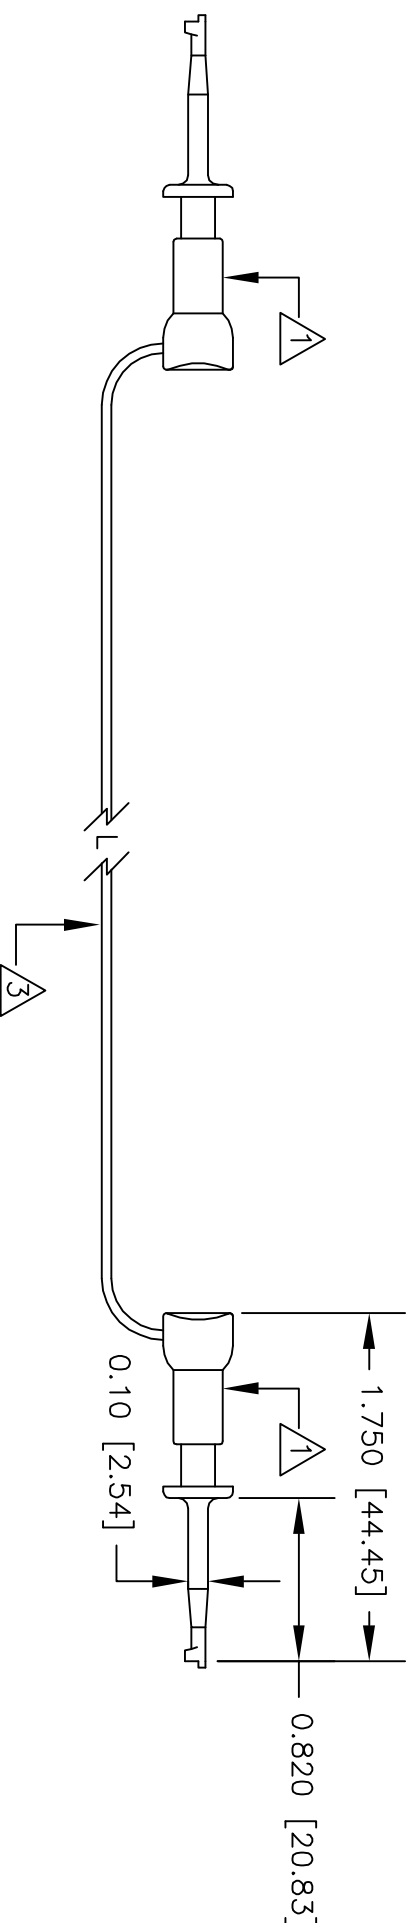

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.		DESCRIPTION	
±	.XX ±	±		MICRO-HOOK (XM) JUMPER	
	.XXX ±			DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
MATERIAL SEE NOTE.		APPROVALS		DRAWING NO.	
		DRAWN		A 08505	
		APPROVED BY		704XM	
FINISH SEE NOTE.		DATE		SCALE	
		R.L. 11/10		1:1	
NEXT ASSY USED ON				SHEET 1 OF 1	
APPLICATION		DO NOT SCALE DRAWING		REV.	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.