

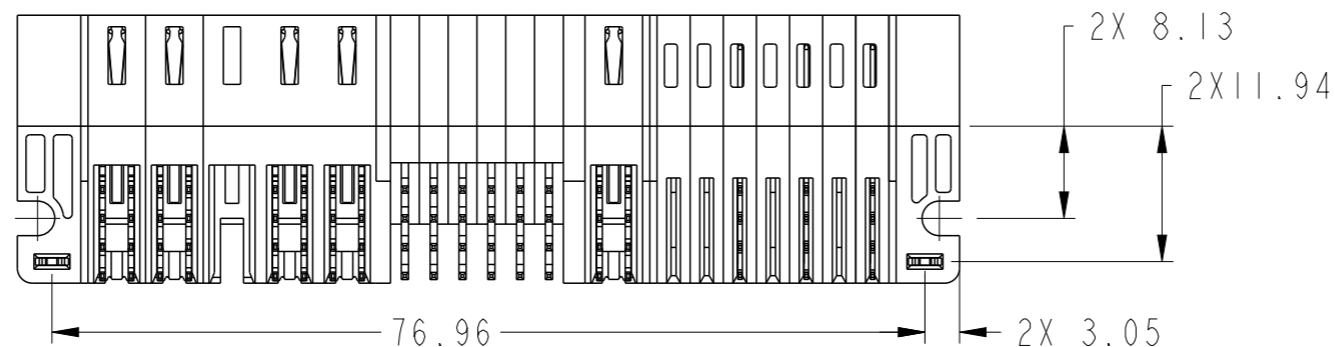
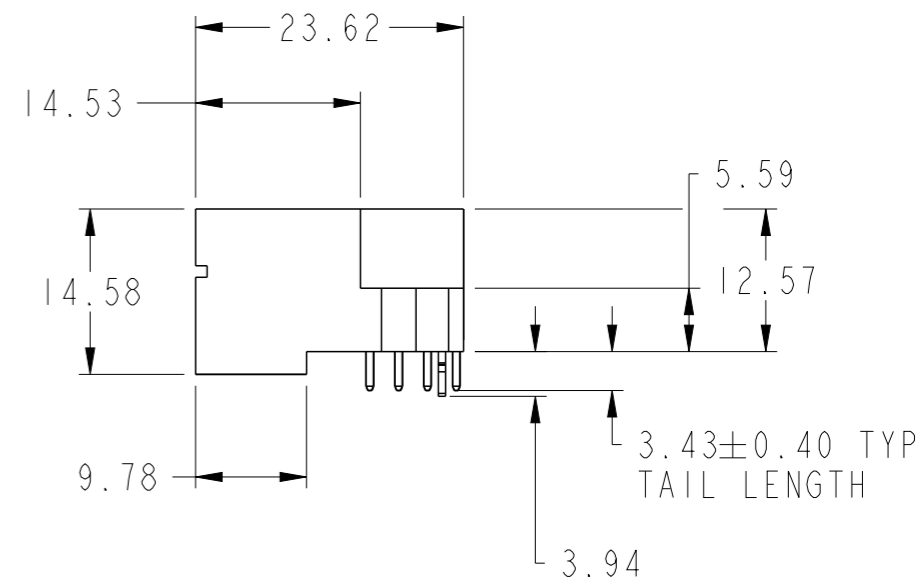


PRODUCT NUMBER SEE SHEET 2

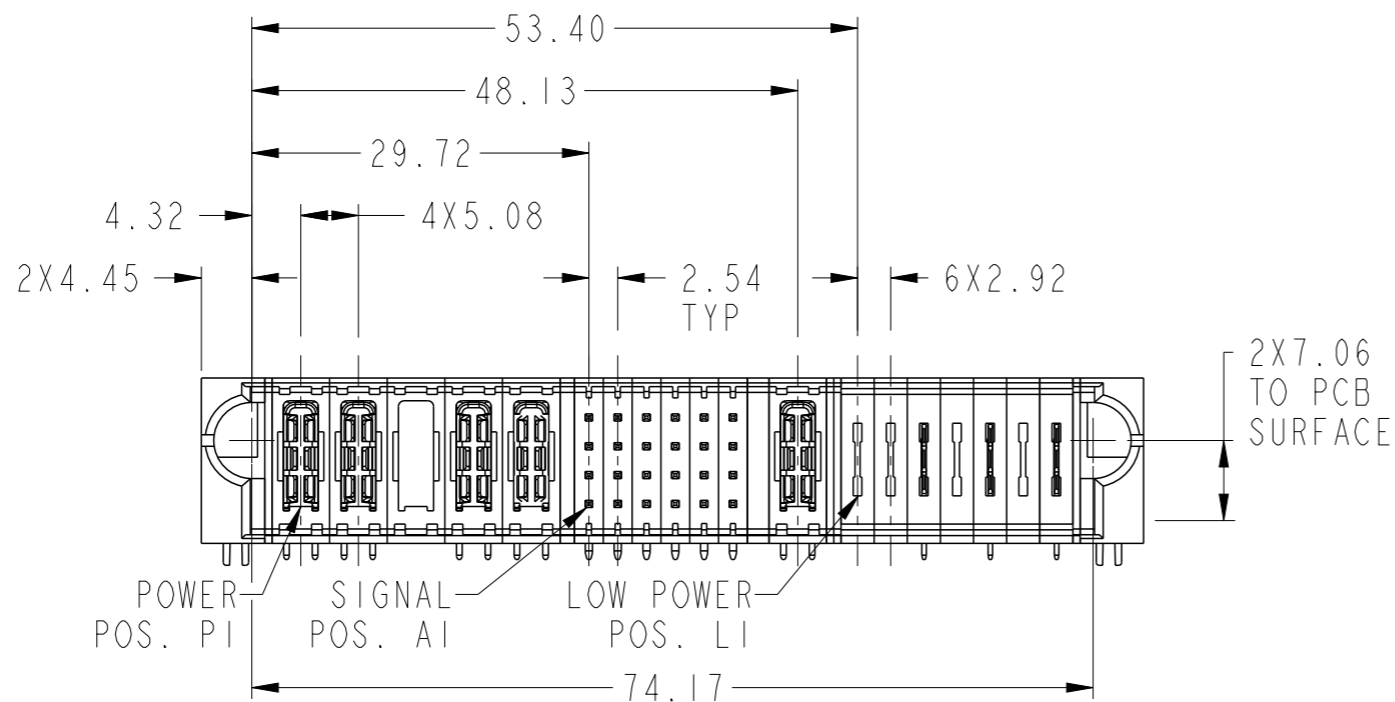


spec ref	*	dr	Peng-Bing Fu	2013/03/21	projection	MM	size	A3	scale	3:2										
tolerance std	ASME Y14.5	eng	Peng-Bing Fu	2013/04/19			ecn no	-	rel level	Released										
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	2013/04/19							product family	PwrBlade+								
surface	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±0.5</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±0.25</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±0.10</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±2°</td> </tr> </table>	linear	0.X	±0.5		0.XX	±0.25		0.XXX	±0.10	angular	0°	±2°	appr	Pei-Ming Zheng	2013/04/19	product family	PwrBlade+	rel level	Released
linear	0.X	±0.5																		
	0.XX	±0.25																		
	0.XXX	±0.10																		
angular	0°	±2°																		
ASME Y14.5		www.fci.com	cat. no.	5HDP + 24S + 1HP+7LP RA STB HEADER	dwg no	10106262-6706001	rev	A												
Product - Customer Drw					sheet 1 of 3															

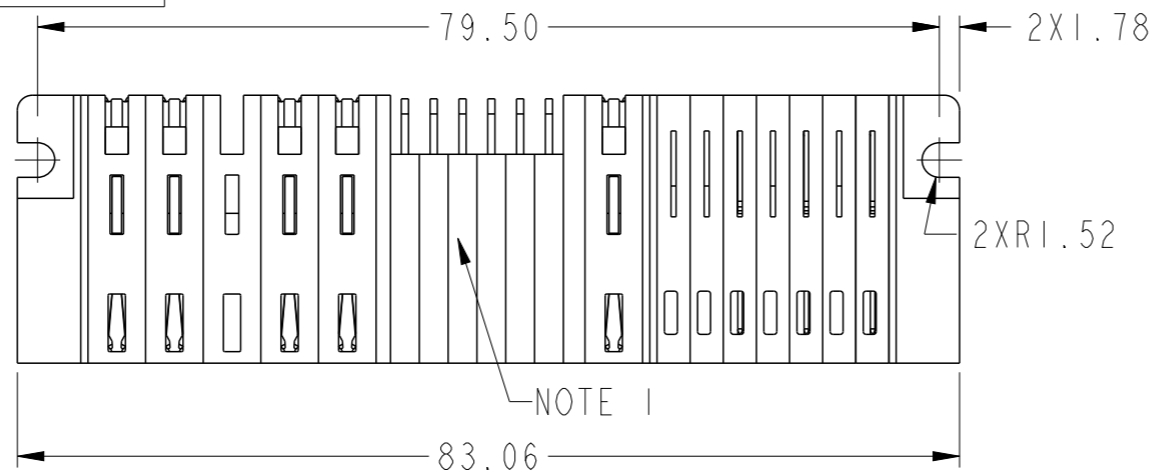

Copyright FCI.

PRODUCT NO.	ROWS	HIGH POWER					SIGNAL						HP	LOW POWER							E2	
		E1	P1	P2	P3	P4	P5	1	2	3	4	5	6	P6	P7	P8	P9	P10	P11	P12		P13
10106262-6706001LF	DCBA	H1	H1	X	H1	H1	U	U	U	U	U	U	H1	X	X	LK	X	LK	X	LK	X	LK
							T	T	T	T	T	T										
							R	R	R	R	R	R										

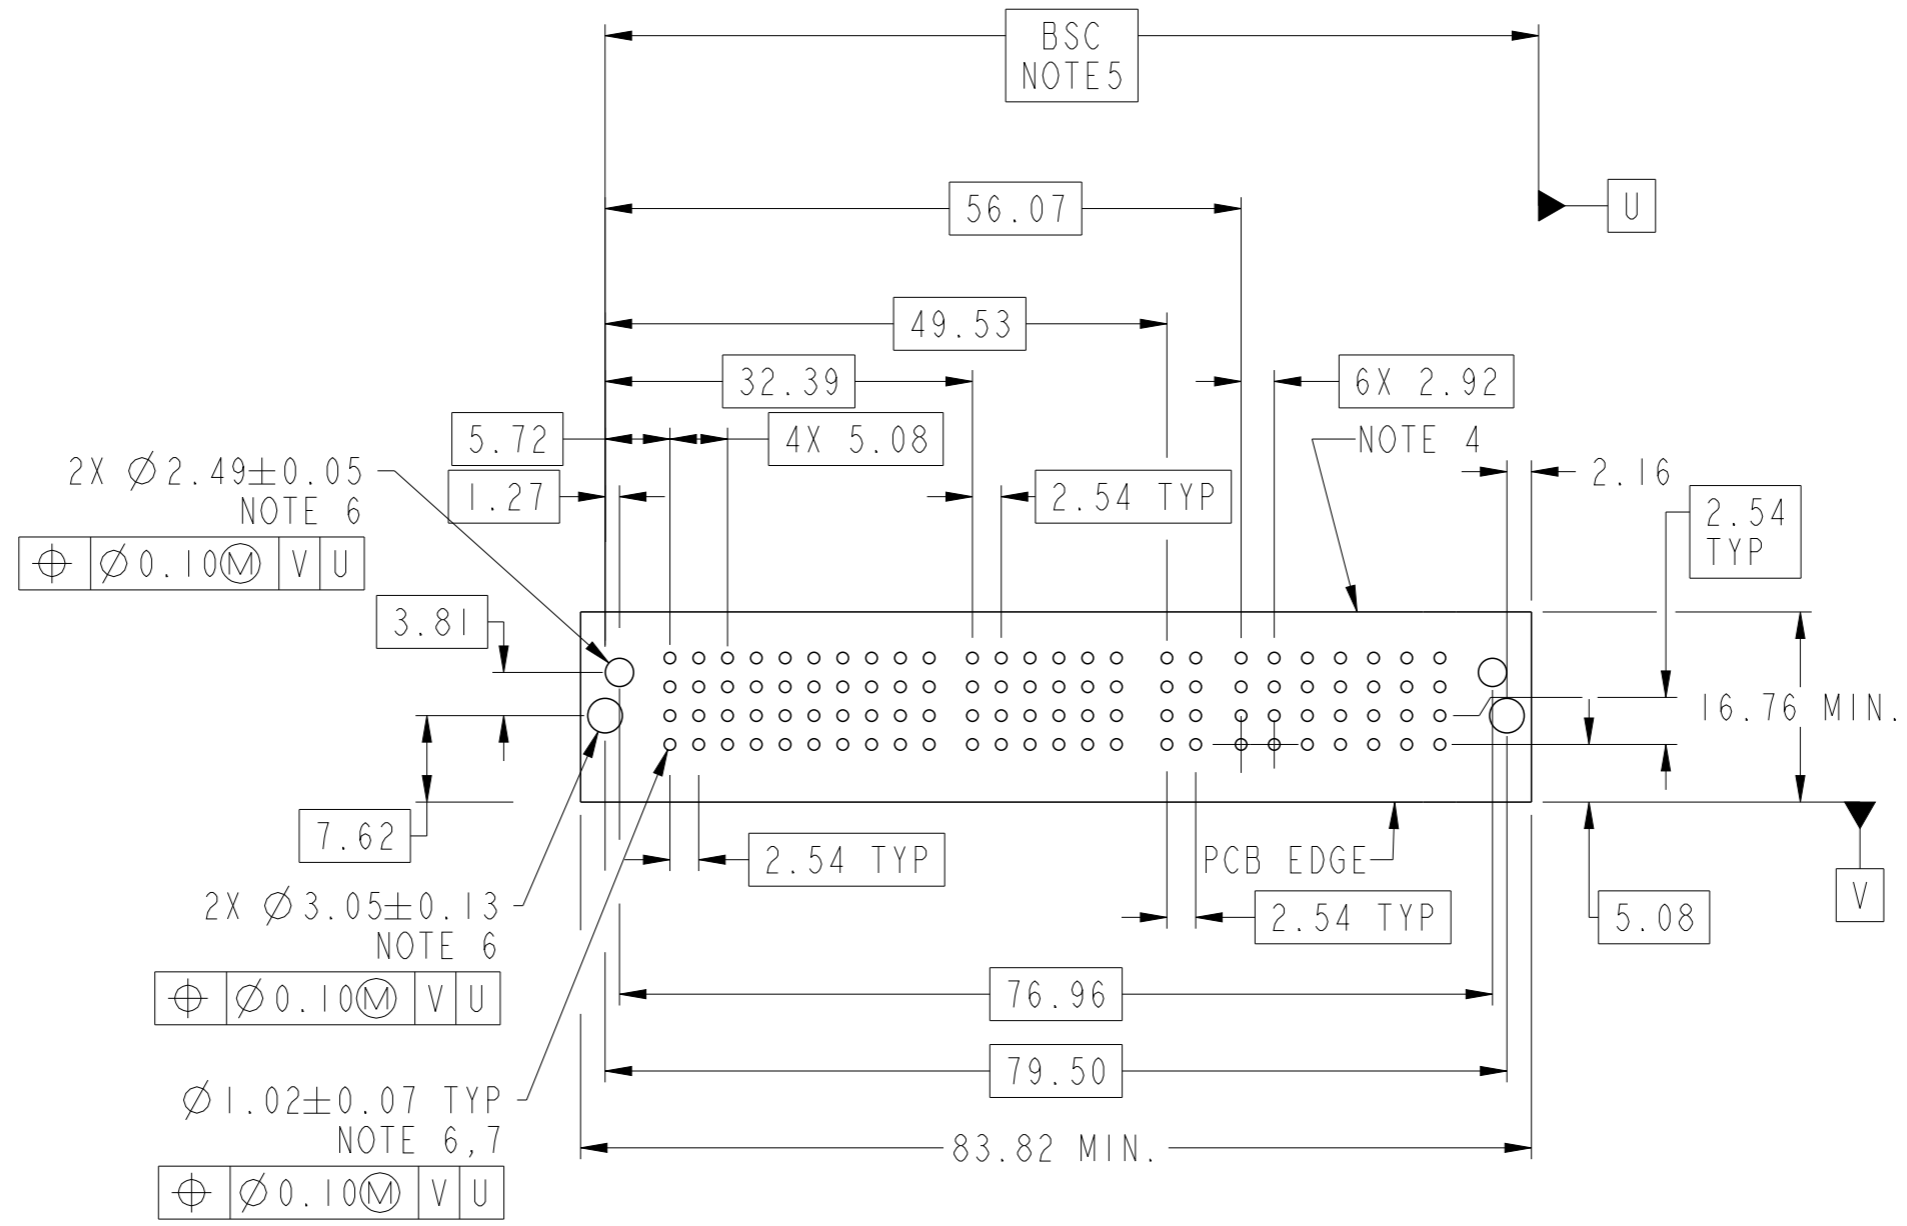

CODE	DESCRIPTION
HI	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
LK	STD LOW POWER CONTACT (3.43)
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)

X	OMITED
---	--------

dr	Peng-Bing Fu	2013/03/21	projection	MM	size	A3	scale	3:2
eng	Peng-Bing Fu	2013/04/19			ecn no		-	
chr	-	-			rel level		Released	
appr	Pei-Ming Zheng	2013/04/19	product family		PwrBlade+		rel level	
			5HDP + 24S + 1HP+7LP			dwg no		10106262-6706001
www.fci.com			RA STB HEADER			rev		A
cat. no.			Product - Customer Drw			sheet 2 of 3		



Copyright FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.  
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:  
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.  
-SIGNAL CONTACT - COPPER ALLOY.  
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENSIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7)  $1.15 \pm 0.025$ MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn  
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A  $1.02 \pm 0.07$ MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.  
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.  
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.



Copyright FCI.

dr	Peng-Bing Fu	2013/03/21	projection 	MM 	size	A3	scale	3:2	
eng	Peng-Bing Fu	2013/04/19			ecn no	-			
chr	-	-			rel level	Released			
appr	Pei-Ming Zheng	2013/04/19	product family	PwrBlade+					
		5HDP + 24S + 1HP+7LP			cat. no.	10106262-6706001		rev	A
www.fci.com		Product - Customer Drw			sheet 3 of 3				