

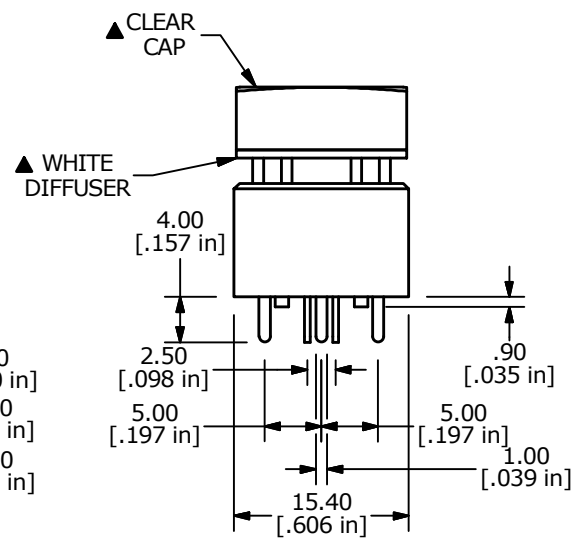


- NOTES:
1. ALL DIMENSIONS IN MM
  2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  3. TERM. NOS. FOR REFERENCE ONLY.
  - ▲ 4. CONTACT RATING: 0.1A MAX. @ 28VDC
  5. CONTACT MATERIAL: GOLD
  6. ELECTRICAL LIFE: 200,000 Typical
  7. MECHANICAL LIFE:  
1,000,000 CYCLES TYP.
  8. OPERATING TEMP: -20°C TO +70°C
  9. OPERATING FORCE: 300 ± 150 gf
  10. CONTACT RESISTANCE:  
100 MILLI-OHM INITIAL TYP. MAX.
  11. INSULATION RESISTANCE:  
500VDC, 100 MΩ MIN.
  12. DIELECTRIC STRENGTH:  
1000 VAC FOR 1 MINUTE
  13. TRAVEL TO MAKE: 2.20mm ± 0.2
  14. 2002/95/EC (ROHS) COMPLIANT
  15. ▲ DENOTES CRITICAL PARAMETER
  - ▲ 16. LED COLOR: GRN: 3 CHIPS; 2.1VDC, @20mA TYP.  
RED: 3 CHIPS; 1.7VDC, @20mA TYP.

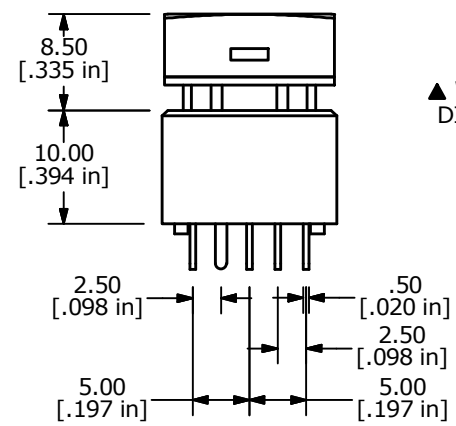

H	22339	UPDATED CONTACT RATINGS	6/7/16	MJR
G	19737	CORRECT TERMINALS	03/07/11	BMA
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE ULP220AP1RSSCL1GRNRED				
SCALE	DATE	DR	DWG	REV
1.5:1	10/10/2007	BF	B800008	H

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED