used for: D-SUB HD

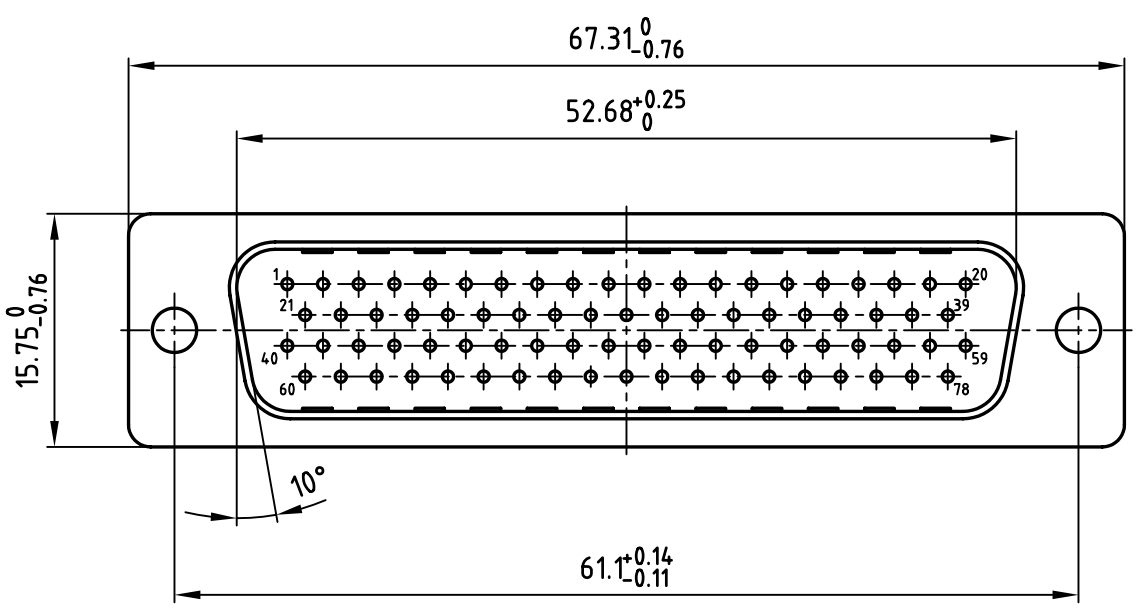

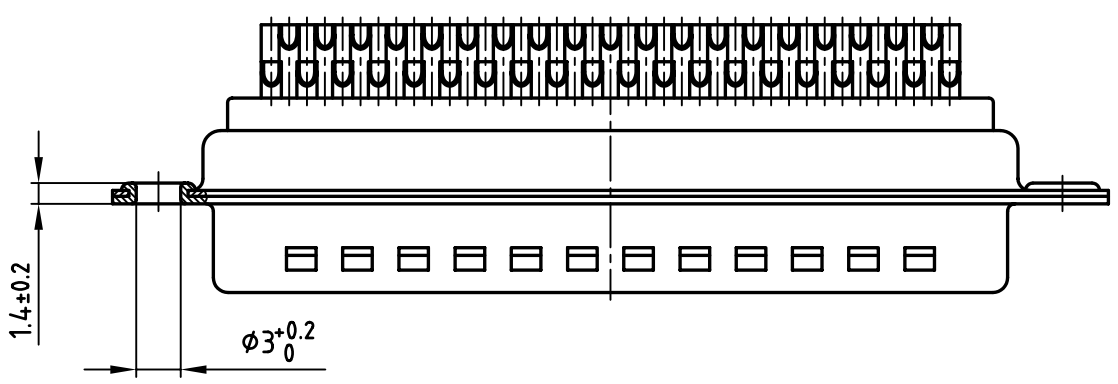

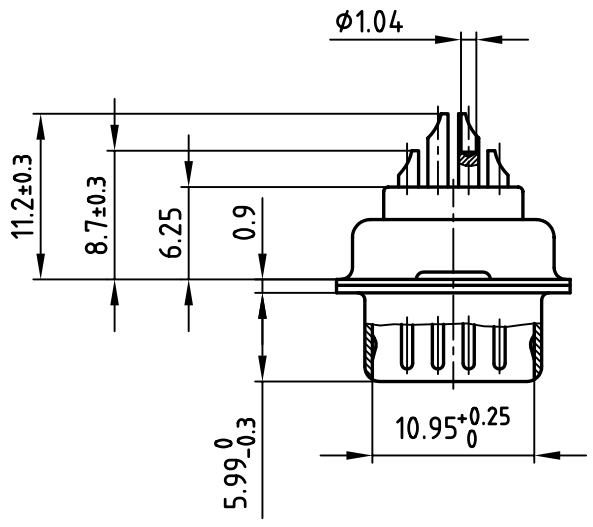

Directive 2002/95/EC „RoHS" Compliant

NOTES:

1. METALSHELLS: STEEL; TIN PLATED
2. INSULATORS: PBT; UL 94 V-0; BLACK
3. STAMPED CONTACTS: COPPER BASED ALLOY
4. CONTACT PLATING: HARDGOLD OVER NICKEL
5. SOLDER CUP ACCEPTS CABLE AWG 22
6. CURRENT RATING: 2.5A
7. PULL FORCE PER CONTACT: 3.4N
8. NOMINAL VOLTAGE: 125V
9. CONTACT RESISTANCE: 10mOHM
10. TEMPERATURE RATING: -65°C TO +150°C

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance

	date	name
1998		
drawn	17.08.	Barcinski
appd.	17.08.	Mickenbecker
norm		
d-old		

scale: 2:1

material: SEE NOTES

title:

D-SUB HD MALE

78pos. SOLDER CUP STAMPED CONTACTS

dwg no: 16K1IFSA

CAD/ REL.13

DIN-A 3

sh: 1/1

product no: 301A11019X