


# Molded RF Chokes

## Special Features

- High Q, high reliability
- Iron or ferrite core
- Injection molded to protect coil from extreme environment
- Flame retardant coating
- Consistent body dimension
- Color band or numerical marking identification
- Dielectric strength 1000Vrms
- Operating temperature -55 to +105°C
- Current to cause 35°C maximum temperature rise

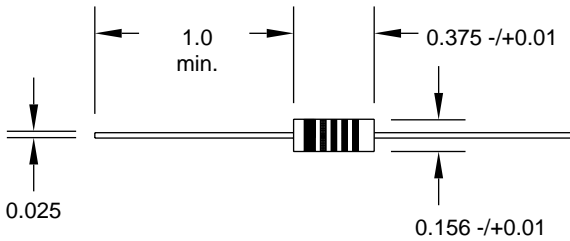

9210 Series						
Part Number	L (uH) ±5%	Q Min.	Test Freq. (MHz)	SRF (MHz) Min.	DCR (Ω) Max.	I, DC (mA)
9210-54	36	60	2.5	15.5	2.5	180
9210-56	39	60	2.5	14.5	2.6	176
9210-58	43	60	2.5	13.7	2.7	172
9210-60	47	55	2.5	13.0	2.75	170
9210-62	51	55	2.5	12.7	2.85	167
9210-64	56	55	2.5	12.0	3.0	164
9210-66	62	55	2.5	11.5	3.15	160
9210-68	68	55	2.5	11.0	3.3	156
9210-70	75	55	2.5	10.5	3.7	147
9210-72	82	50	2.5	10.3	3.9	143
9210-74	91	50	2.5	10.0	4.3	136
9210-76	100	50	2.5	9.5	4.5	133
9210-78	110	60	7.9	8.9	4.9	128
9210-80	120	65	7.9	8.7	5.2	124
9210-82	130	65	7.9	8.5	5.45	121
9210-84	150	65	7.9	8.0	6.05	114
9210-86	160	65	7.9	7.5	6.40	111
9210-88	180	65	7.9	7.0	6.75	108
9210-90	200	65	7.9	6.5	7.1	106
9210-92	220	65	7.9	6.2	7.45	103
9210-94	240	65	7.9	5.9	7.8	101

**J.W. Miller**  
M A G N E T I C S

306 E. Alondra Blvd., Gardena, CA 90247-1059 • (310) 515-1720 • FAX (310) 515-1962

[www.jwmiller.com](http://www.jwmiller.com)