

**Ratings**

Voltage: 300 V  
 Temperature: 80 °C  
 Flammability: VW-1, FT1

**Conductor**

Conductor count: 10  
 Gauge: 24 AWG, 0.22 mm<sup>2</sup>  
 Material: tinned copper strands  
 Stranding:  $\varnothing 0.16 \times 11$   
 Resistance at 20 °C: 95 ohm/km maximum

**Insulator**

Material: SRPVC, 80 °C  
 Color: black, white, red, yellow, blue, green, orange, purple, gray, brown  
 Outer diameter:  $\varnothing 1.2 \pm 0.10$  mm  
 Thickness: 0.23 mm minimum average  
 Style: UL 1061

**Outer jacket**

Material: PVC, 80 °C  
 Color: gray  
 Diameter:  $\varnothing 6.5 \pm 0.30$  mm  
 Thickness: 0.76 mm minimum average



**Wire marking:** E339579 UL AWM STYLE 2464 24AWG 80°C 300V VW-1 --- cUL AWM I A 80°C 300V FT1 TENSILITY

**Tests**

Tensile strength: 1.05 kgf/mm<sup>2</sup>  
 After aging at 113 ± 2 °C for 7 days:  
 Minimum tensile strength 70 % original  
 Minimum elongation 65 % original  
 Flexibility: no observed cracking  
 Heat shock: 121 ± 1 °C /1 hour, no observed degradation  
 Deformation: 121 ± 1 °C /1hour, ≤ 50 %  
 Cold bend: -10 ± 2 °C /1 hour, no observed cracking  
 Dielectric: 2000 Vac for 1 minute without breakdown

**Use:**

Internal wiring or external interconnection of electronic equipment

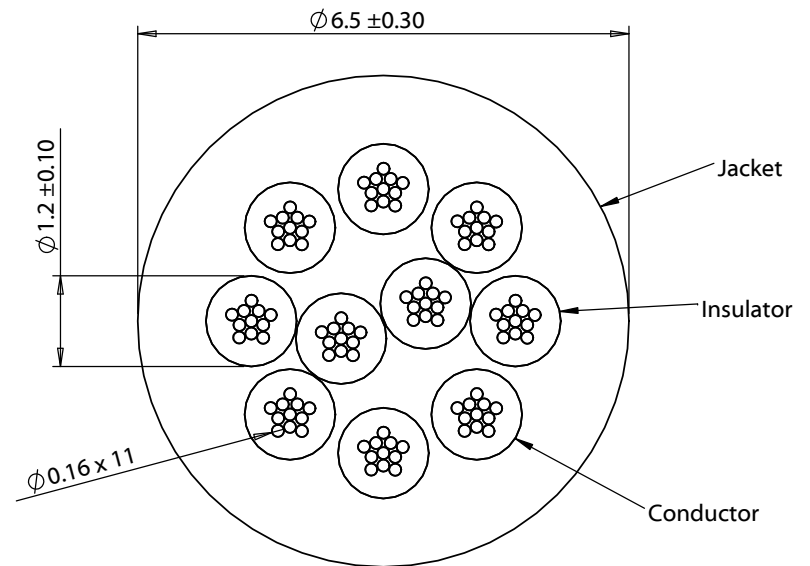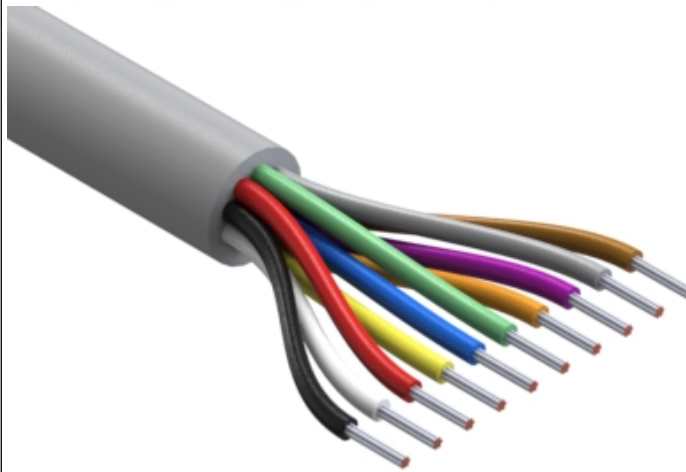

REVISION	DATE	DESCRIPTION
A	10/13/2015	Initial release
A1	1/26/2016	Updated stranding and dimensions

PREPARED:

VERIFIED:

DIMENSIONS ARE IN MILLIMETERS

TOLERANCES:  
 X: ± 0.5 mm  
 X.X: ± 0.3 mm  
 X.XX: ± 0.05 mm

NOTES  
 RoHS and REACH compliant

Function test: no open, no short circuit, no intermittent

Meets UL appliance wiring standard 758

DESCRIPTION:  
 Wire, 10C TS, 24 AWG, UL2464, 300V, 80C, 6.5 mm, VW-1, PVC, gray

**TENSILITY**

20802 Sockeye Place #130  
 Bend, OR 97701 USA  
 tel 541.323.3228 fax 541.323.4202  
 800 877.670.7118 www.tensility.com

SIZE A	PART NUMBER 30-00533
-----------	-------------------------

SCALE: 1:1

SHEET 1 OF 1