

CGJ4J3X7S2A334K125AA

TDK Item Description : CGJ4J3X7S2A334KT****



Application & Main Feature

High Reliability Grade (Mid Voltage (100 to 630V))

Series

CGJ4(2012) [EIA CC0805]



Dimensions

L 2.00mm +/-0.2mm
 W 1.25mm +/-0.2mm
 T 1.25mm +/-0.2mm
 B 0.20mm Min.
 G 0.50mm Min.

Temperature Characteristic

X7S (-55 to 125 degC +/-22%)

Rated Voltage

2A (100Vdc)

Capacitance

330nF

Capacitance Tolerance

K (+/-10%)

Dissipation Factor

5% Max.


Insulation Resistance

1.52Gohm Min.


AEC-Q200

Yes


DC Bias Characteristic

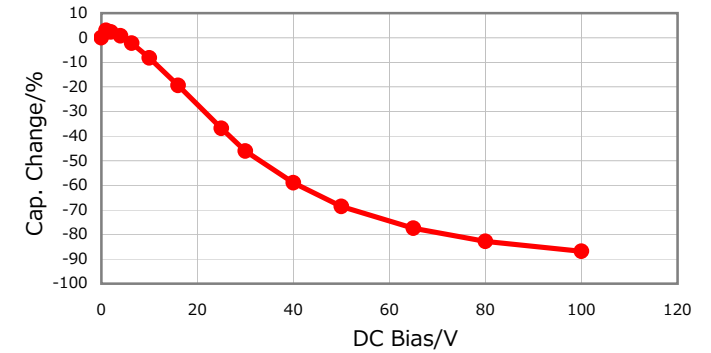


|Z|, ESR vs. Freq. Characteristics

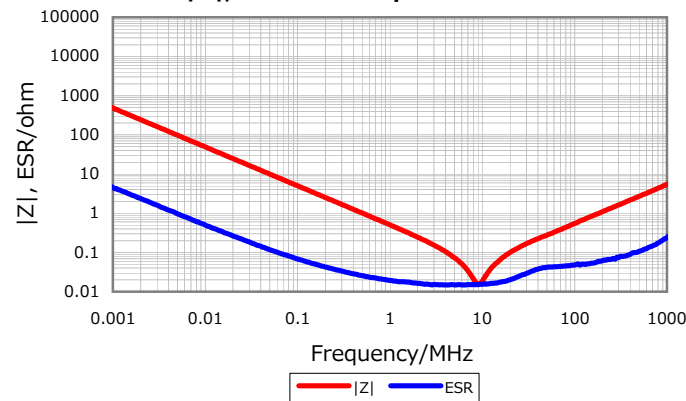


Temperature Characteristics

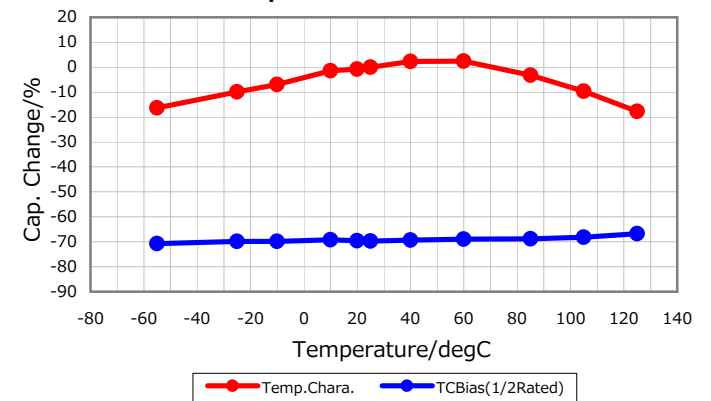

Cap. vs. Freq. Characteristic

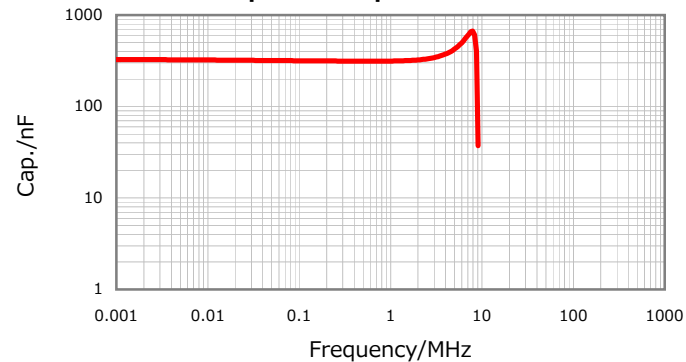

Ripple Temperature Rise Characteristics

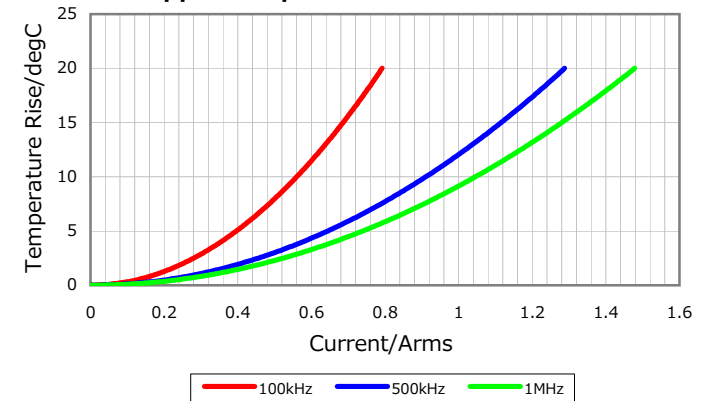

Characterization Sheet (Multilayer Ceramic Chip Capacitors)



All specifications are subject to change without notice.

January 4, 2016